

Exhibited

This planning application is open for
public comment until
17 August 2026

Reference no	PLN-26-0141
Site	(LOT 2) 50 LOGAN ROAD EVANDALE
Proposed Development	Single Dwelling
Zone	8.0 General Residential
Use class	Residential

Written representations may be made during this time to the General Manager;
mailed to PO Box 156, Longford, Tasmania 7301,
delivered to Council offices or
a pdf letter emailed to planning@nmc.tas.gov.au

(no special form required)



Exhibited

PLANNING APPLICATION

FOR BUILDINGS, WORKS AND CHANGE OF USE

(E.g. Residential houses, sheds, carports, retaining walls, visitor accommodation, commercial development, signage etc.)

Office Use Only:

The Proposal

Description of proposal:

Single Residential Dwelling

Driveway construction material:

The Land

Site address:

50 Logan Road, Evandale

Title reference:

C/T: 186056/2

Existing buildings on site:

Existing use of site:

Vacant Land

**Applicant justification of any variation/discretion to the
Tasmanian Planning Scheme – Northern Midlands**

'Priority Final Plan'

OWNER: STEPHEN JAMES HENDERSON ALISON KATE HENDERSON	PLAN OF SURVEY	REGISTERED NUMBER SP186056
FOLIO REFERENCE: C.T.184251/100	WOOLCOTT SURVEYS	APPROVED EFFECTIVE FROM ...20 DEC. 2023...
GRANTEE: PART OF 60 ACRES LOCATED TO JOSEPH DELL.	BY SURVEYOR: COLIN STERLING SMITH LOCATION: TOWN OF EVANDALE	Record of Titles
SCALE 1:1500 LENGTHS IN METRES		LOT 100. IS COMPILED FROM C.T.184251/100 AND THIS SURVEY
Registered Land Surveyor 25/10/2023 Date	Council Delegate 1-12-2023 Date	

Site Specific Study for PLN-26-0141

Single Dwelling 50 Logan Road Evandale
Within Attenuation Distance of
'TASMANIAN GUN CLUB' - 200 NILE RD EVANDALE TAS 7212

Response to Code C9.0 Attenuation Code clause C9.5.2 P1:

P1 Sensitive use within an attenuation area, must not interfere with or constrain an existing activity listed in Tables C9.1 or C9.2 having regard to:

a) the nature of the activity with potential to cause emissions including:

a. operational characteristics of the activity

Response: The activity (shooting range) undertakes outdoor shooting and emissions such as noise are likely to occur during their operating hours.

b. scale and intensity of the activity

Response: Land Size: 2232m² Dwelling Size: 221.31

c. degree of hazard or pollution that may be emitted from the activity

Response: Noise from guns being fired.

b) the nature of the sensitive use

Response: Residential Dwelling

c) The extent of encroachment by the sensitive use into the attenuation area

Response: The attenuation distance is 2,000m. The activity is approximately 1,500m from the proposed sensitive use.

d) Measures in the design, layout and construction of the development for the sensitive use to eliminate, mitigate or manage effects of emissions of the activity

Response: Insulation to be installed as per Wilson Homes Drawings – Insulation as follows:

ROOF MIN. 50mm FOIL FACED BLANKET UNDER ROOFING
CEILING R4.1 BATTS (EXCL. GARAGE, ALFRESCO)
EXT. WALLS R2.0 BATTS (EXCL. GARAGE)
WALL WRAP TO ENTIRE HOUSE
INT. WALLS R2.0 BATTS ADJACENT TO GARAGE AND AS PER PLAN
FLOOR BIAx SLAB R0.60

e) Any advice from the Director, Environment Protection Authority

Response: Not applicable.

f) Any advice from the Director of Mines

Response: Not applicable.

Signed: Makayla Bruce C/-Wilson Homes Tasmania Pty Ltd

Date: 30/07/26

DA
TASMANIAN PLANNING SCHEME

SHEET INDEX

1	COVER SHEET
2	SITE PLAN
3	SITE PLAN 1:500
4	SOIL & WATER MANAGEMENT PLAN
5	SOIL & WATER MANAGEMENT PLAN 1:500
6	GROUND FLOOR PLAN
7	ELEVATIONS / SECTION
8	ELEVATIONS
9	WINDOW & DOOR SCHEDULES
10	CALCULATIONS
11	DETAILS (FACE BRICKWORK)
12	ROOF DRAINAGE PLAN
13	ROOF VENTILATION PLAN
14	FLOOR COVERINGS
15	KITCHEN DETAILS
16	BUTLER'S PANTRY DETAILS
17	BATHROOM DETAILS
18	ENSUITE DETAILS
19	WC DETAILS
20	LAUNDRY DETAILS
21	3D VIEWS
22	GENERAL NOTES
23	WET AREA & ENERGY EFFICIENCY NOTES
24	BUILDING ACT BUSHFIRE HAZARD AREAS
25	BAL 12.5 NOTES
26	BAL 12.5 - BAL 40 ROOF DETAILS

TOTAL FLOOR AREAS

MAIN DWELLING, GROUND FLOOR		
LIVING		214.28
PORCH		6.95
		221.23 m²

HIGHLY REACTIVE /
PROBLEMATIC SOIL TYPE.
REFER TO HYDRAULICS PLANS
AND DETAILS PREPARED BY HED

PRELIMINARY PLAN SET

11	PRELIMINARY PLAN SET - COLOUR AND VARIATIONS REF.001 UPDATE	ALL	2026.05.21	TRV	-
10	PRELIMINARY PLAN SET - DRIVEWAY AREA AND NOTATION UPDATE	ALL	2026.05.11	RT2	-
9	PRELIMINARY PLAN SET - REPOSITION HARDSTAND	ALL	2026.05.07	PL1	-
8	PRELIMINARY PLAN SET - INITIAL ISSUE	ALL	2026.04.23	TNG	-
No.	AMENDMENT	SHEET	DATE	DRAWN	CHECK

AS & NCC COMPLIANCE

- ALL CONSTRUCTION TO BE IN ACCORDANCE WITH NCC 2022 AND APPLICABLE AUSTRALIAN STANDARDS AT TIME OF APPROVAL.
- SLAB IN ACCORDANCE WITH AS 2870. REFER TO ENGINEERS DETAILS FOR ALL SLAB DETAILS.
 - BRICK CONTROL JOINTS PROVIDED IN ACCORDANCE WITH NCC 2022.
 - ALL STEEL FRAMING TO BE DESIGNED TO AS 4100-2020 OR AS/NZS 4600-2018.
 - INSULATION TO BE INSTALLED IN ACCORDANCE WITH NCC 2022 AND ALL APPLICABLE AUSTRALIAN STANDARDS.
 - TERMITE PROTECTION IN ACCORDANCE WITH AS 3660 AND NCC 2022.
 - GLAZING IN ACCORDANCE WITH AS 1288 AND NCC 2022.
 - SMOKE ALARMS IN ACCORDANCE WITH AS 3786 AND NCC 2022.
 - INTERNAL WATERPROOFING IN ACCORDANCE WITH NCC 2022 HOUSING PROVISIONS PART 10.2.
 - EXTERNAL WATERPROOFING IN ACCORDANCE WITH AS 3740 AND AS 4654.
 - WET AREA FLOORS TO FALL TO FLOOR WASTES AT MIN. 1:80 AND MAX. 1:50 GRADE (IF APPLICABLE).
 - CONDENSATION MANAGEMENT IN ACCORDANCE WITH NCC 2022 HOUSING PROVISIONS PART 10.8.
 - BUILDING SEALING IN ACCORDANCE WITH NCC 2022.
 - SERVICES IN ACCORDANCE WITH NCC 2022.
 - EARTHWORKS IN ACCORDANCE WITH AS 3798-2007.
 - EXTERNAL WALL WRAP (SARKING) IN ACCORDANCE WITH NCC 2022 (IF APPLICABLE).
 - EXHAUST FANS DUCTED TO OUTSIDE AIR (IF APPLICABLE).


SITE SPECIFIC CONTROLS

CONTROL	DETAILS
ACID SULPHATE SOIL	NO
BIODIVERSITY	NO
BUILDING ENVELOPE	YES
BUSHFIRE	BAL-12.5
CLIMATE ZONE (NCC)	ZONE 7 - COOL TEMPERATE
DESIGN WIND CLASSIFICATION	N3 (EXPOSED TBC)
ESTATE/DEVELOPER GUIDELINES	NO
FLOOD OVERLAY	NO
HERITAGE	NO
LANDSLIP HAZARD	NO
MINIMUM FLOOR LEVEL	NO
NATURAL ASSET CODE	NO
NOISE ATTENUATION	YES
SALINE SOIL	NO
SHIELDING FACTOR	NS - NO SHIELDING
SITE CLASSIFICATION	H2
SPECIFIC AREA PLAN OVERLAY	YES
EVANDALE SPECIFIC AREA PLAN	
TERRAIN CATEGORY	TC1
TOPOGRAPHIC CLASSIFICATION	T0
WATERWAY & COASTAL OVERLAY	NO
WIND REGION	A - NORMAL
WITHIN 1km CALM SALT WATER	NO
WITHIN 50km BREAKING SURF	NO
ZONING	GENERAL RESIDENTIAL
AIRPORT OBSTACLE LIMITATION AREA	

BUILDING CONTROLS & COMPLIANCE

CONTROL	REQUIRED	PROPOSED
SETBACKS		
FRONT	MIN. 4,500mm	9,941mm
SIDE A	MIN. 1,500mm	13,093mm
SIDE B	MIN. 1,500mm	12,707mm
REAR	MIN. 1,500mm	11,930mm
BULK & SCALE		
SITE AREA	2,232m²	
SITE COVERAGE	MAX. 50%	9.91%
LANDSCAPE		
NO APPLICABLE CONTROLS		
EARTHWORKS		
CUT DEPTH	MAX. 2,000mm	522mm
FILL DEPTH	MAX. 800mm	462mm
ACCESS & AMENITY		
PARKING SPACES	MIN. 2 SPACES	2 SPACES


3D PERSPECTIVE

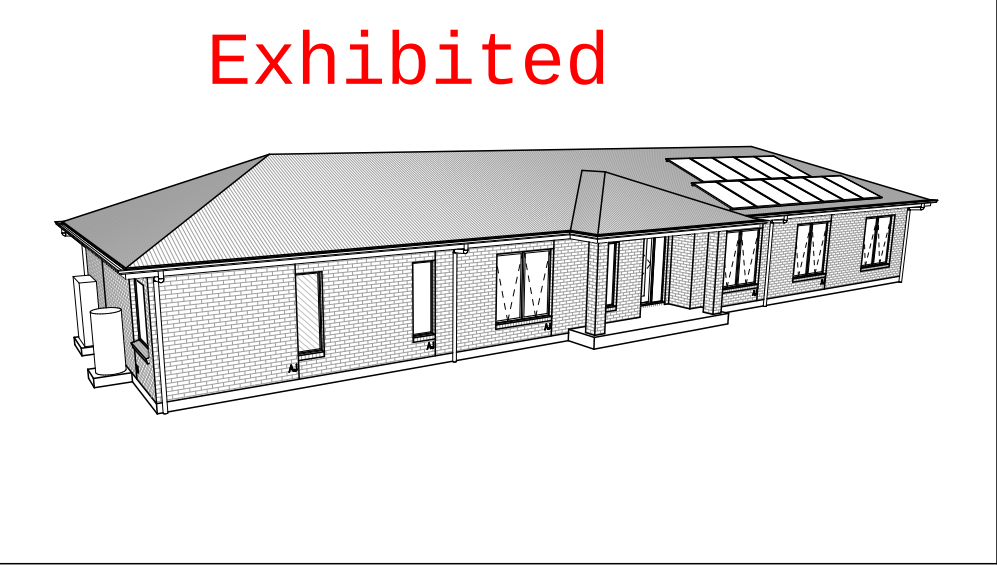

NOTE TO OWNER

THESE PLANS MAY FEATURE WORKS THAT ARE EXCLUDED FROM THE SCOPE OF WORKS WITH THE BUILDER, BUT THEY HAVE BEEN INCLUDED IN THESE DRAWINGS TO ASSIST IN THE OVERALL PLANNING AND ASSESSMENT OF THE BUILDING PROJECT. EXAMPLES OF SOME REGULARLY EXCLUDED WORKS INCLUDE DRIVEWAYS, RETAINING WALLS, SOLAR PANEL SPACING AND SITE DRAINAGE. PLEASE REFER TO YOUR SCOPE OF WORKS AND COLOUR SELECTIONS DOCUMENTATION FOR DETAILS OF INCLUDED WORKS. SOME DETAILS ARE INDICATIVE ONLY FOR EXAMPLE FLOORING, TILING, BRICKWORK AND CLADDING (EXPANSION JOINTS, ORIENTATION AND LAYOUT) AND ARE SUBJECT TO CHANGE.

LOCATION MAP

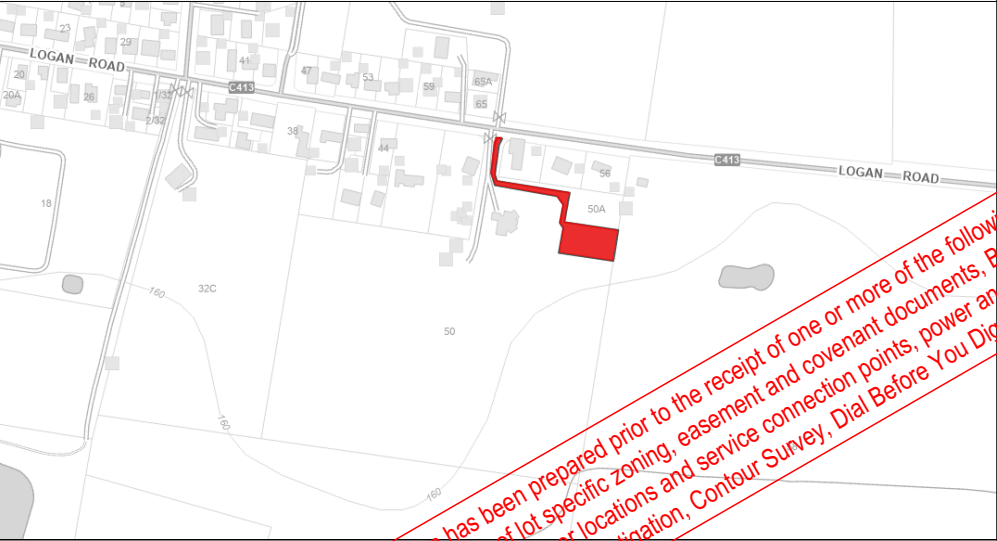

This Plan has been prepared prior to the receipt of one or more of the following documents:-
Certificate of Title inclusive of lot specific zoning, easement and covenant documents, BAL report and rating, approved subdivision plans providing crossover locations and service connection points, power and communications connection point information, Geotechnical Site Investigation, Contour Survey, Dial Before You Dig information, Planning Approval.

BUILDING INFORMATION

GROUND FLOOR TOP OF WALL HEIGHT(S)		2755mm
NOTE: CEILING HEIGHT 45mm LOWER THAN TOP OF WALL		
ROOF PITCH (U.N.O.)		23.0°
ELECTRICITY SUPPLY		3-PHASE
GAS SUPPLY		NONE
ROOF MATERIAL		SHEET METAL
ROOF COLOUR		DARK
WALL MATERIAL		BRICK VENEER
SLAB CLASSIFICATION		TBC

INSULATION

ROOF	MIN. 50mm FOIL FACED BLANKET UNDER ROOFING
CEILING	R4.1 BATTS (EXCL. GARAGE, ALFRESCO)
EXT. WALLS	R2.0 BATTS (EXCL. GARAGE) WALL WRAP TO ENTIRE HOUSE
INT. WALLS	R2.0 BATTS ADJACENT TO GARAGE AND AS PER PLAN
FLOOR	BIAX SLAB R0.60

NCC 2022 LIVABLE HOUSING COMPLIANCE

ACCESSIBLE SANITARY COMPARTMENT: WC
ACCESSIBLE SHOWER LOCATION: BATH

GENERAL NOTES:

- THRESHOLD OF ACCESSIBLE SHOWER ENTRY TO BE MAX. 5MM
- 1 EXTERIOR DOOR NOMINATED AS 870 OR GREATER TO ACHIEVE MIN 820MM CLEAR OPENING
- REFER TO APPLICABLE WET AREA PLANS AND INTERIOR ELEVATIONS OR LOCATIONS OF REQUIRED WALL REINFORCEMENT FOR FUTURE GRAB RAIL INSTALLATION.

BUSHFIRE REQUIREMENTS - BAL-12.5

THE BUILDER USES MATERIALS THAT COMPLY WITH AS 3959-2018 OR HAVE BEEN TESTED TO AS 1530.8.1 IN ACCORDANCE WITH AS 3959-2018 (CLAUSE 3.8).

ROOF:

- PROVIDE FOIL FACED BLANKET INSULATION TO ALL COLORBOND SHEET ROOFING.
- PROVIDE SARKING TO ALL TILED ROOFING INCLUDING PRESSTITE TO VALLEYS.
- PROVIDE BAL-12.5 RATED DEKTITE TO ALL AIR VENTS ON ROOF.
- PROVIDE BAL-12.5 RATED ALUMINIUM MESH TO ALL SOFFIT AND EAVE VENTS.
- PROVIDE BAL-12.5 RATED ALUMINIUM MESH TO ALL EXHAUST VENTS.

WALLS, POSTS AND BEAMS:

- PROVIDE SPARK ARRESTORS TO ALL EXTERNAL BRICKWORK.
- EXTERNAL TIMBER POSTS WITHIN 400mm OF ADJACENT FINISHED FLOOR LEVEL TO BE BUSHFIRE-RESISTING TIMBER UNLESS MOUNTED ON STIRRUPS TO PROVIDE MIN. 75mm CLEARANCE ABOVE ADJACENT FINISHED FLOOR LEVEL.

WINDOWS AND DOORS:

- PROVIDE FLYSCREENS WITH CORROSION RESISTANT MESH TO ALL OPERABLE WINDOW SASHES (NO REQUIREMENT TO SCREEN BI-FOLD / FRENCH / SLIDING / STACKER DOORS).
- PROVIDE BAL-12.5 RATED ALUMINIUM WINDOWS AND EXTERNAL GLASS SLIDING / STACKER DOORS IN ACCORDANCE WITH AS 3959-2018.
- PROVIDE ALUMINIUM DOOR JAMBS TO ALL EXTERNAL TIMBER DOORS.
- PROVIDE SAFETY SCREENS WITH CORROSION RESISTANT MESH TO EXTERNAL TIMBER HUNG DOORS (IF REQUIRED).
- PROVIDE SEAL TO ALL GARAGE PANELIFT / ROLLER DOORS.

OTHER:

- PROVIDE COPPER WATER PIPES FROM WATER TANK TO HOUSE.

SUBJECT TO NCC 2022
(1 MAY 2023)

WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE:	DATE:
-----	-----
SIGNATURE:	DATE:
-----	-----
PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED	

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.




SPECIFICATION:		REVISION	DRAWN	CLIENT:	HOUSE DESIGN:	HOUSE CODE:	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
DESIGNER	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC 28/03/2026	POOJA WIJERATNE & MENAKA DILSHAN	WOODBIDGE 24	H-WDNWBG10SA	
COPYRIGHT:	8	PRELIM PLANS - INITIAL ISSUE	TNG 23/04/2026	ADDRESS:	FACADE DESIGN:	FACADE CODE:	
© 2026	9	PRELIM PLANS - AMENDMENTS	PL1 07.05.2026	50 LOGAN RD, EVANDALE TAS 7212	CLASSIC	F-WDNWBG10CLASA	
	10	PRELIM PLANS- DRIVEWAY UPDATE	RT2 11/05/2026	LOT / SECTION / CT:	SHEET TITLE:	SCALES:	
	11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV 21/05/2026	2 / - / 186056	COVER SHEET	1 / 26	714562
				COUNCIL:			
				NORTHERN MIDLANDS			

REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:
- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION

APPROX. CUT/FILL		
CUT	30.34m³	68.27t
FILL	29.19m³	65.68t
DIFFERENCE	1.15m³	2.59t
EVEN CUT & FILL		

LOT SIZE: 2232m²
HOUSE (COVERED AREA): 221.31m²
SITE COVERAGE: 9.92%

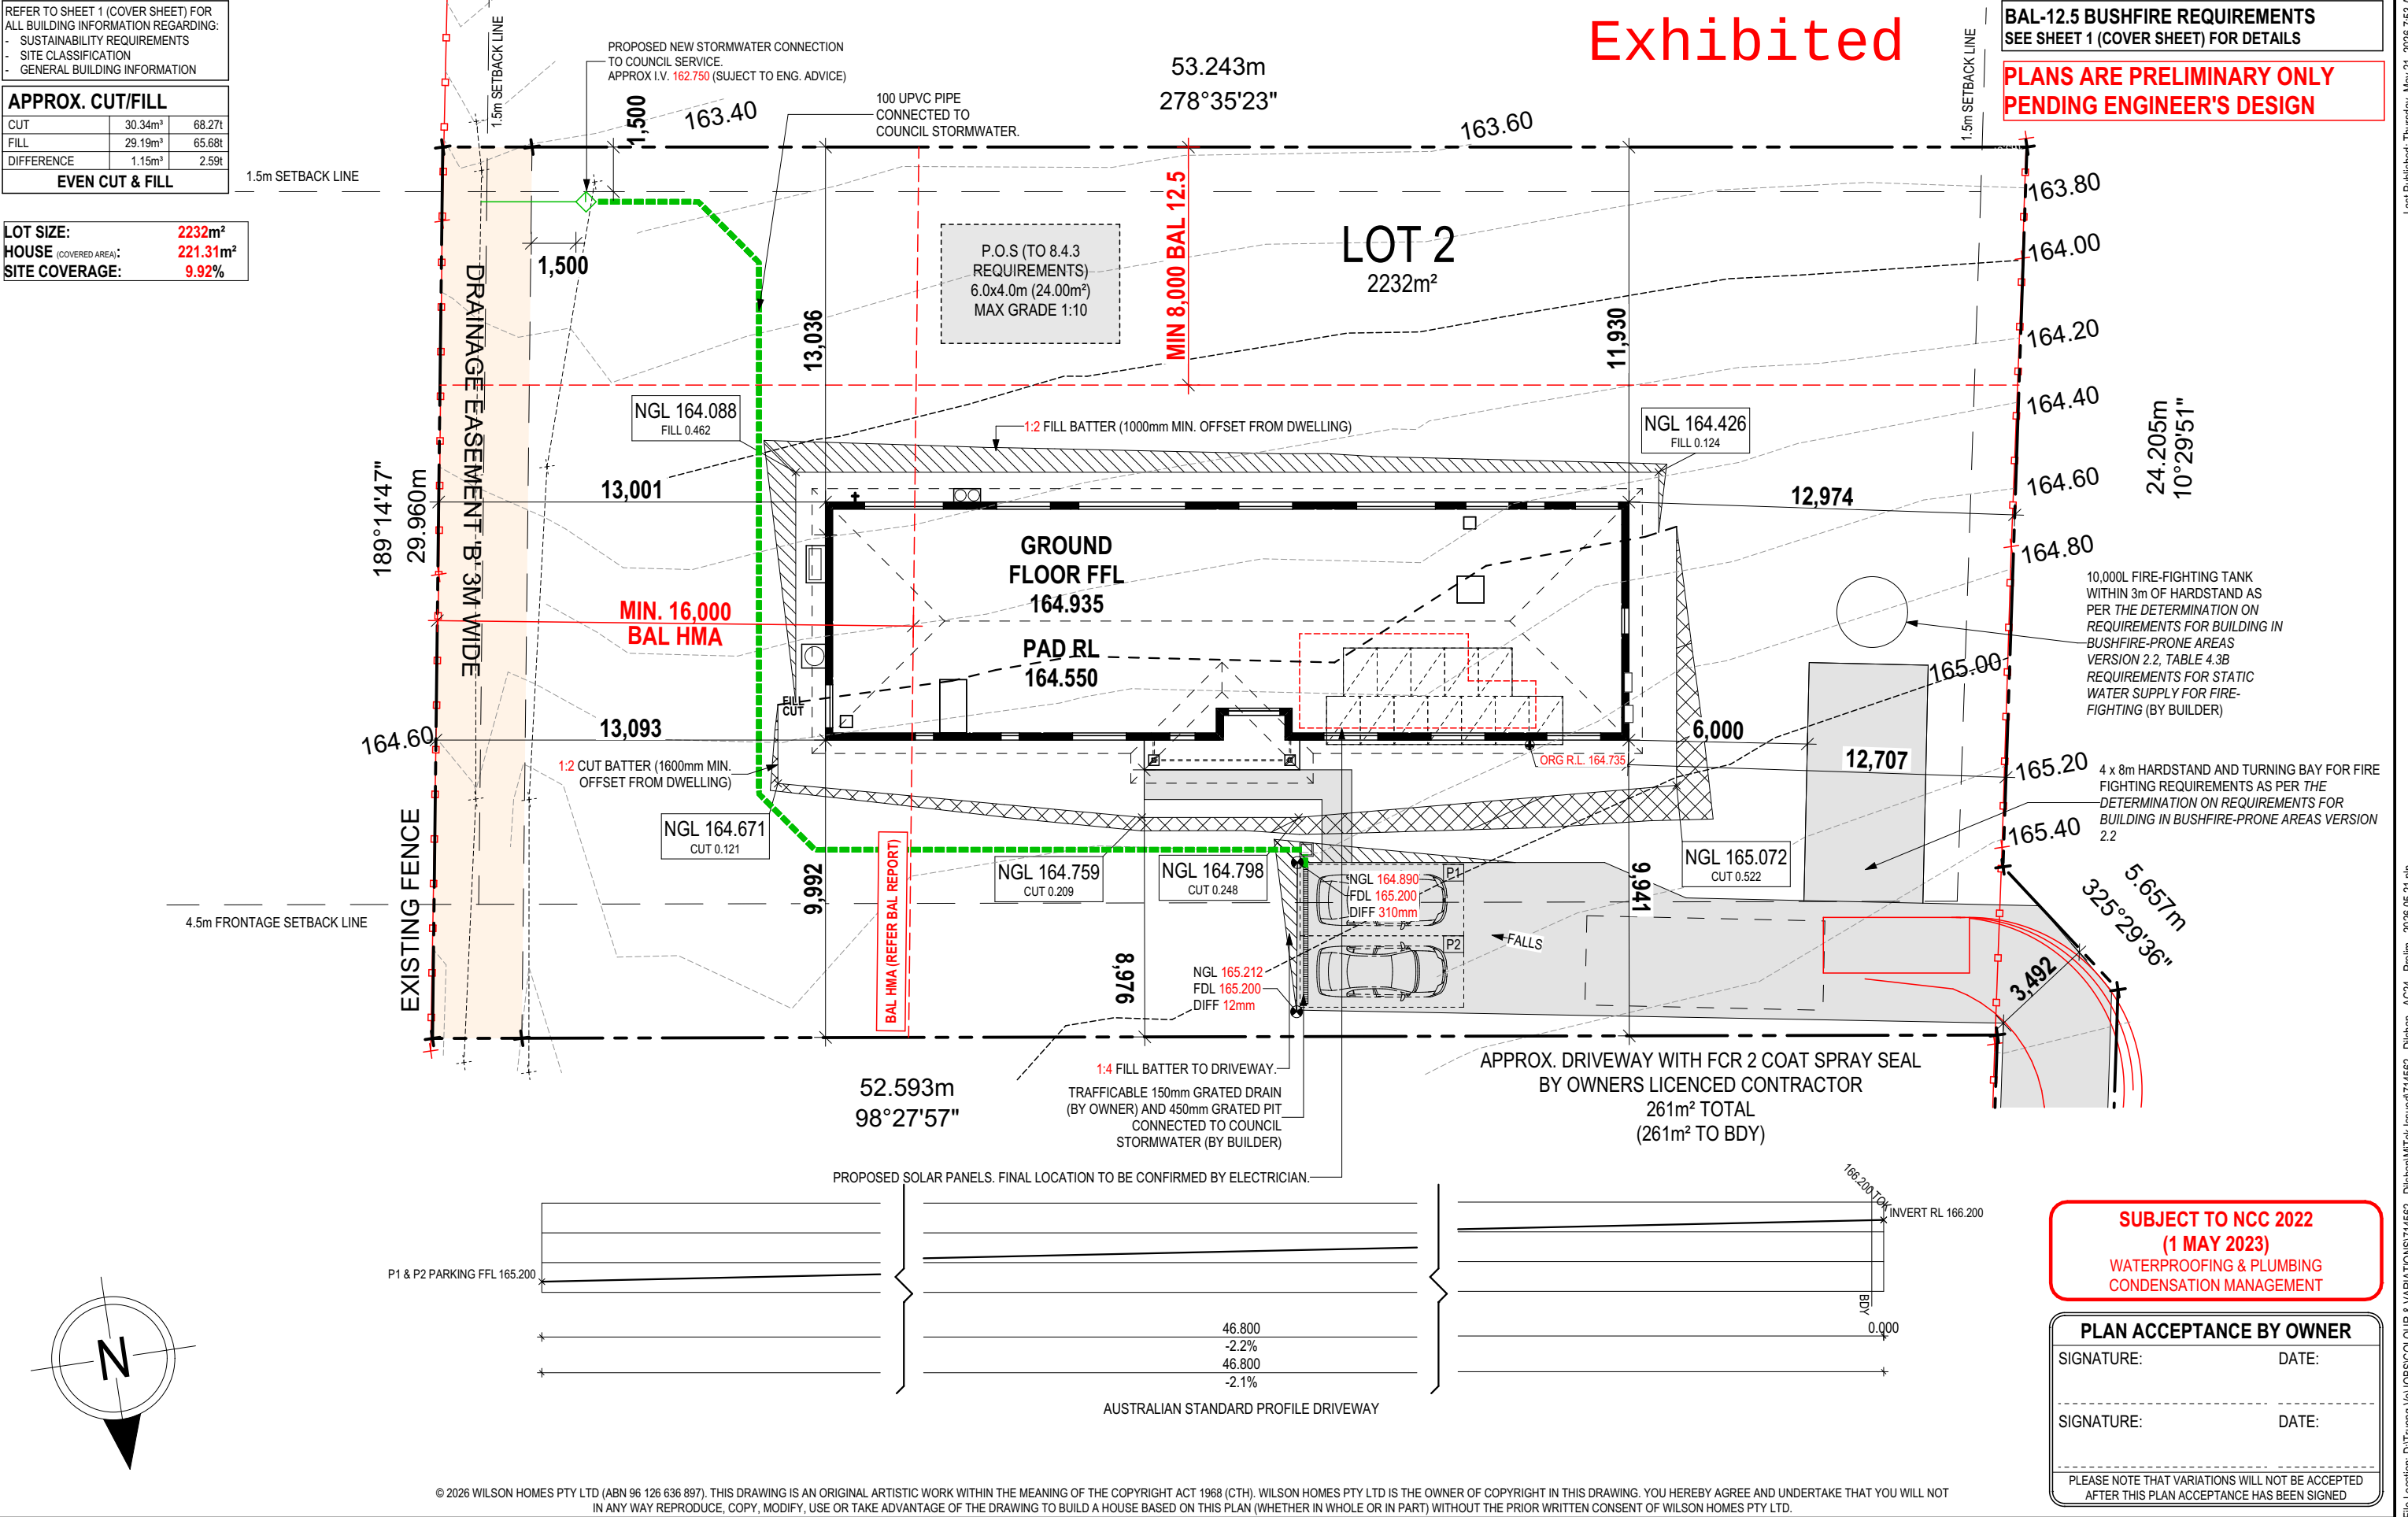


REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:

- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION

APPROX. CUT/FILL		
CUT	30.34m³	68.27t
FILL	29.19m³	65.68t
DIFFERENCE	1.15m³	2.59t
EVEN CUT & FILL		

LOT SIZE: 2232m²
HOUSE (COVERED AREA): 221.31m²
SITE COVERAGE: 9.92%

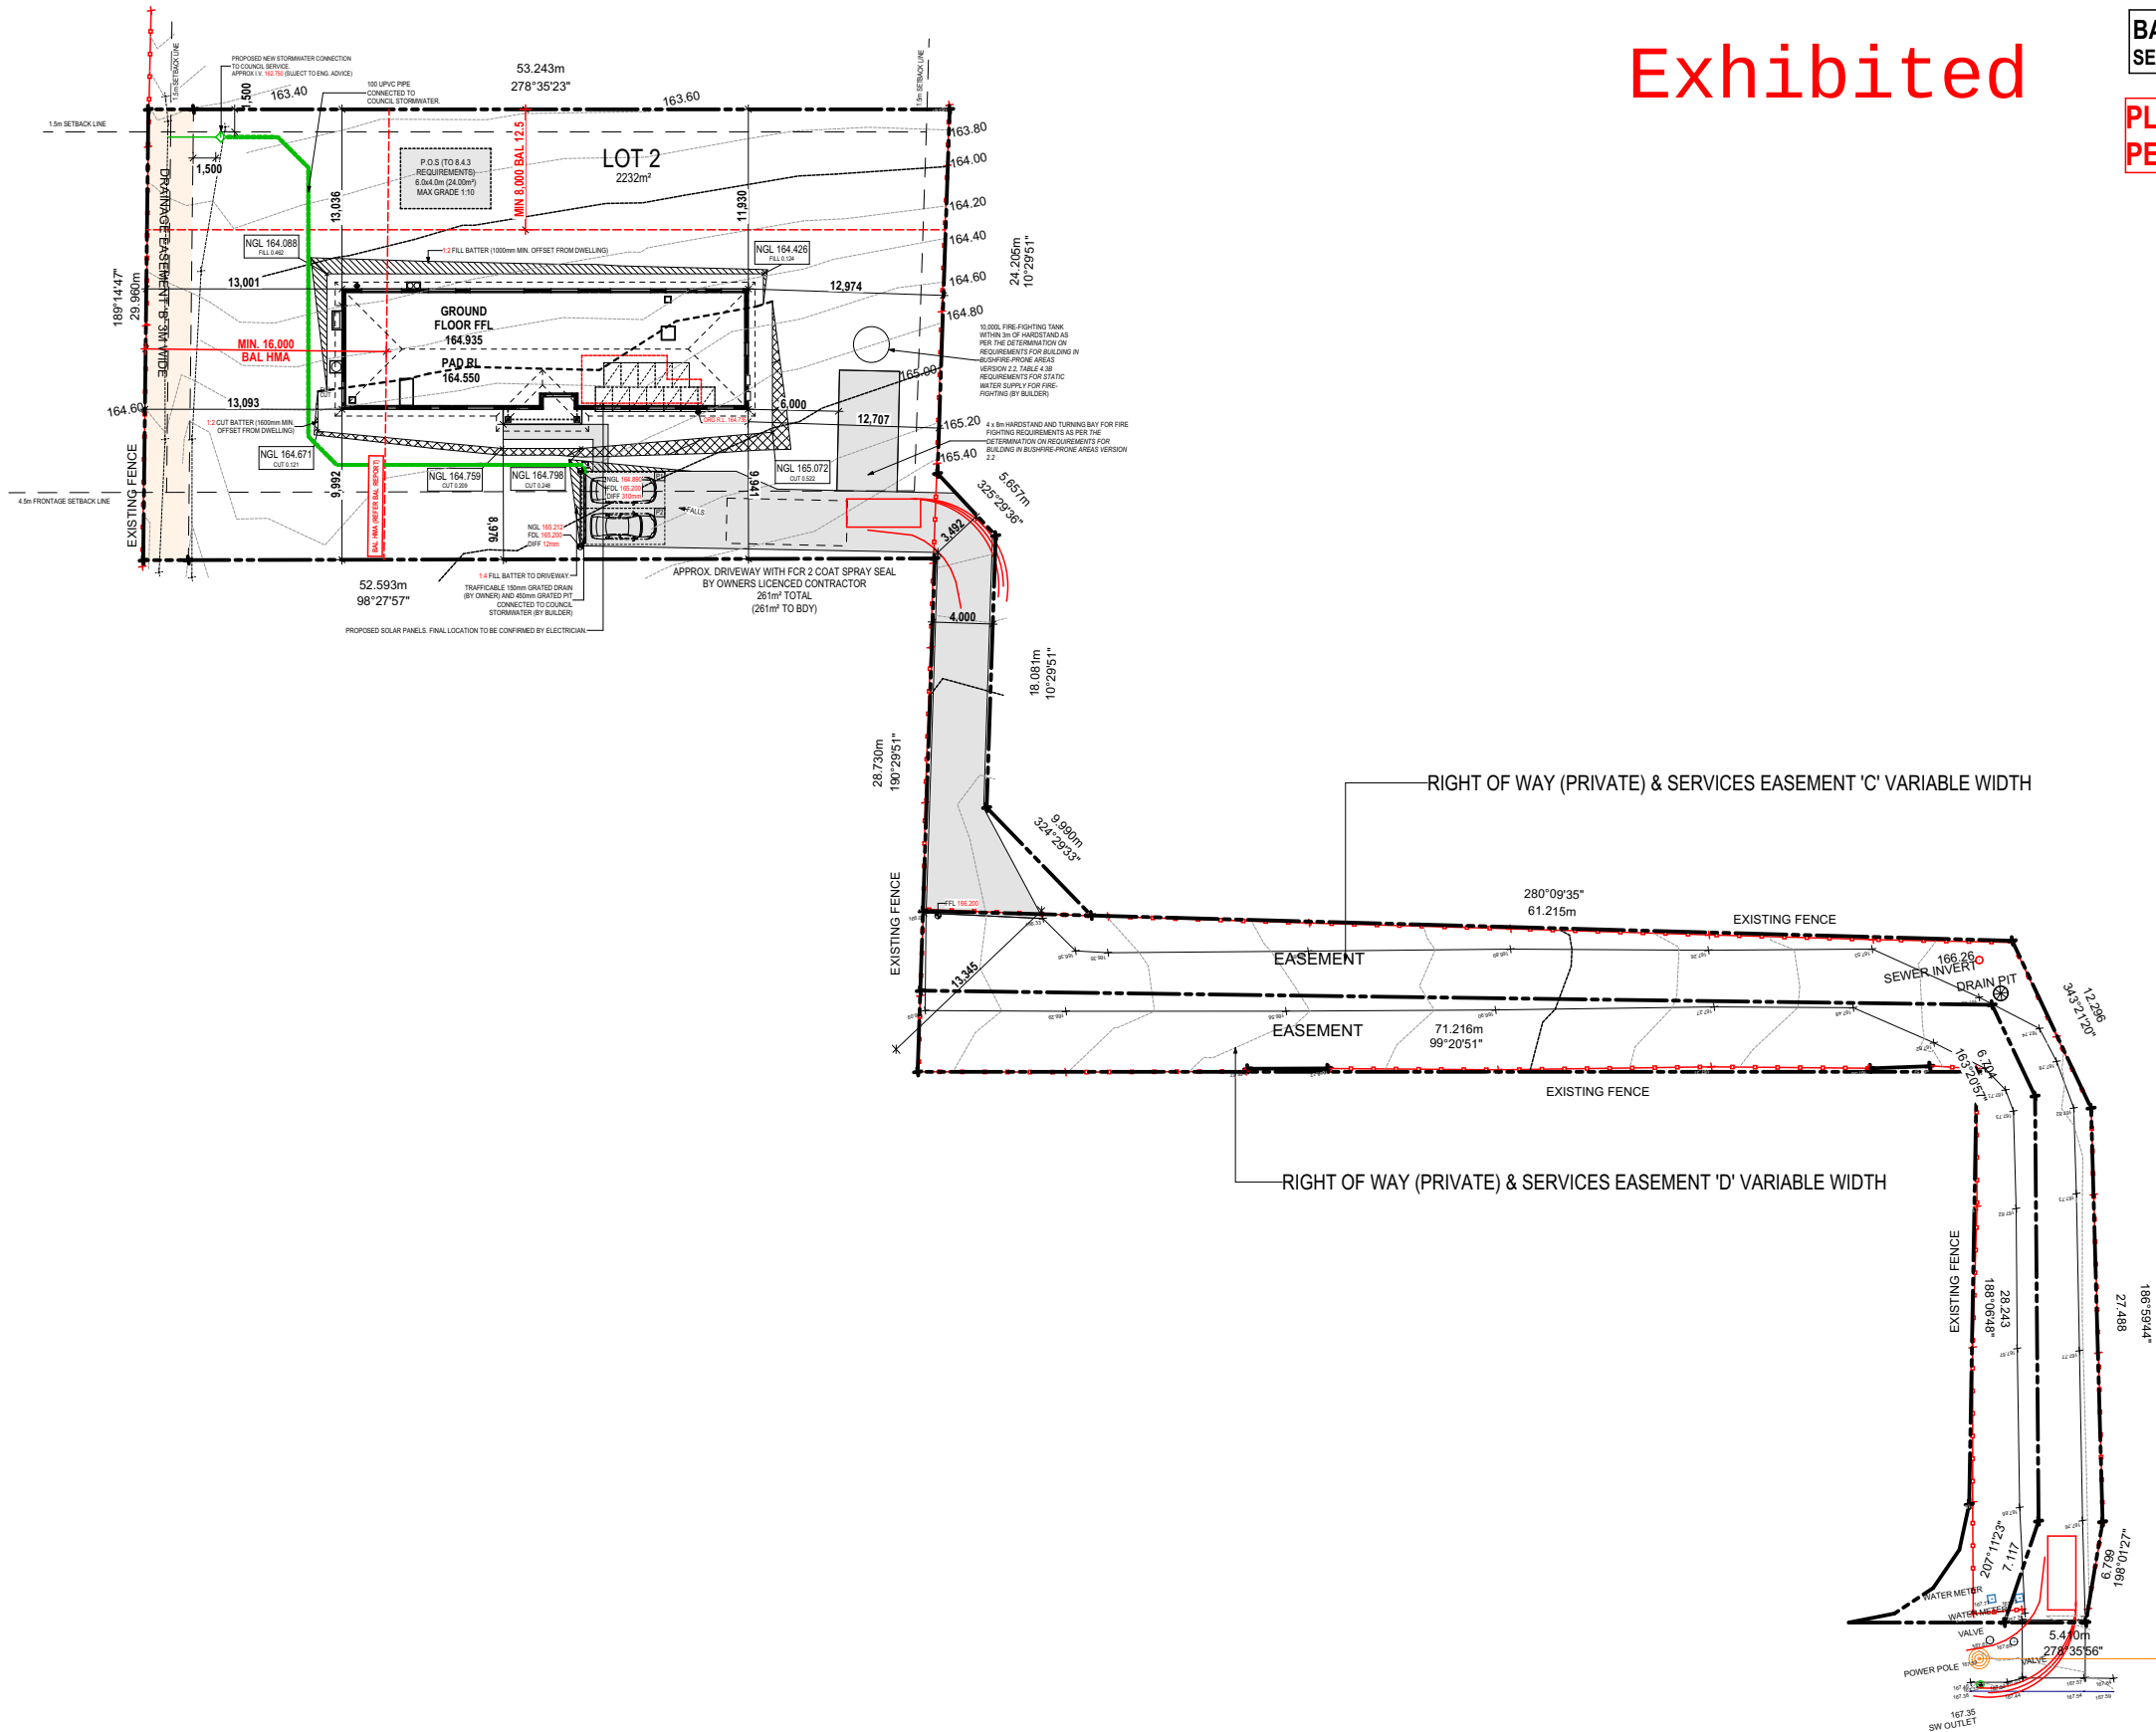

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

PLANS ARE PRELIMINARY ONLY
PENDING ENGINEER'S DESIGN

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED
AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

LOGAN ROAD

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.



SPECIFICATION: DESIGNER COPYRIGHT: © 2026	REVISION		DRAWN		CLIENT: POOJA WIJERATNE & MENAKA DILSHAN ADDRESS: 50 LOGAN RD, EVANDALE TAS 7212 LOT / SECTION / CT: 2 / - / 186056 COUNCIL: NORTHERN MIDLANDS	HOUSE DESIGN: WOODBIDGE 24 FACADE DESIGN: CLASSIC SHEET TITLE: SITE PLAN 1:500	HOUSE CODE: H-WDNWBG10SA FACADE CODE: F-WDNWBG10CLASA SHEET No.: 3 / 26	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE. 714562
	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC	28/03/2026				
	8	PRELIM PLANS - INITIAL ISSUE	TNG	23/04/2026				
	9	PRELIM PLANS - AMENDMENTS	PL1	07.05.2026				
	10	PRELIM PLANS - DRIVEWAY UPDATE	RT2	11/05/2026				
	11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV	21/05/2026				

ALL VEGETATION OUTSIDE THE BUILDING ZONE WILL BE MAINTAINED.


OWNER TO STABILISE THE SITE ON COMPLETION OF THE BUILD WITH TURF LAWNS, GRASS SEEDS, NATIVE GROUND COVERS AND/ OR MULCH SPREAD TO A DEPTH OF 75-100mm

THE FOLLOWING IS A STANDARD APPROACH. SEDIMENT AND EROSION CONTROL MEASURES WILL BE REVIEWED PRIOR TO COMMENCING WORK AND INSTALLED BASED ON THE OUTCOME OF THAT REVIEW.


NOTES:

1. ALL EROSION AND SEDIMENT CONTROL STRUCTURES TO BE INSPECTED EACH WORKING DAY AND MAINTAINED IN GOOD WORKING ORDER.
2. ALL GROUND COVER VEGETATION OUTSIDE THE IMMEDIATE BUILDING AREA TO BE PRESERVED DURING THE BUILDING PHASE.
3. ALL EROSION AND SEDIMENT CONTROL MEASURES TO BE INSTALLED PRIOR TO COMMENCEMENT OF MAJOR EARTHWORKS.
4. STOCKPILES OF CLAYEY MATERIAL TO BE COVERED WITH AN IMPERVIOUS SHEET.
5. ROOF WATER DOWNPIPES TO BE CONNECTED TO THE PERMANENT UNDERGROUND STORMWATER DRAINAGE SYSTEM AS SOON AS PRACTICAL AFTER THE ROOF IS LAID.


6. DIVERSION DRAINS ARE TO BE CONNECTED TO A LEGAL DISCHARGE POINT (COUNCIL STORMWATER SYSTEM, WATERCOURSE OR ROAD DRAIN).
7. SEDIMENT RETENTION TRAPS INSTALLED AROUND THE INLETS TO THE STORMWATER SYSTEM TO PREVENT SEDIMENT & OTHER DEBRIS BLOCKING THE DRAINS.

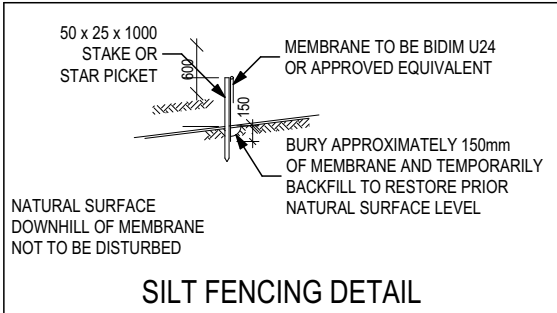

SILT FENCING DETAIL

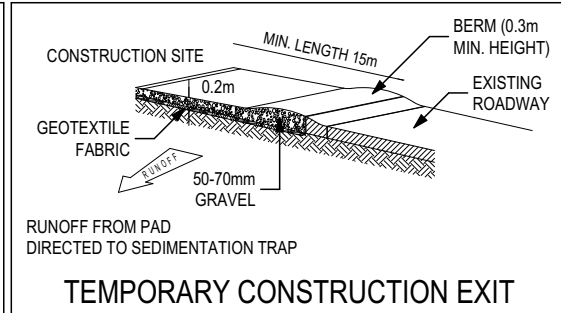

TEMPORARY CONSTRUCTION EXIT

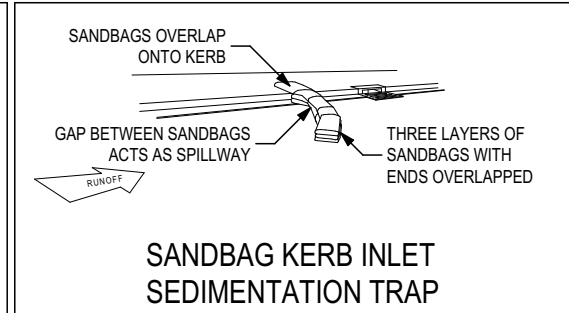



SANDBAG KERB INLET SEDIMENTATION TRAP

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.



SPECIFICATION:		REVISION		DRAWN		CLIENT:		HOUSE DESIGN:		HOUSE CODE:		DO NOT SCALE DRAWINGS, USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.	
DESIGNER		7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC	28/03/2026	POOJA WIJERATNE & MENAKA DILSHAN		WOODBIDGE 24		H-WDNWBG10SA			
COPYRIGHT:		8	PRELIM PLANS - INITIAL ISSUE	TNG	23/04/2026	ADDRESS:		FACADE DESIGN:		FACADE CODE:			
© 2026		9	PRELIM PLANS - AMENDMENTS	PL1	07.05.2026	50 LOGAN RD, EVANDALE TAS 7212		CLASSIC		F-WDNWBG10CLASA			
		10	PRELIM PLANS- DRIVEWAY UPDATE	RT2	11/05/2026	LOT / SECTION / CT:		SHEET TITLE:		SHEET No.:	SCALES:		
		11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV	21/05/2026	2 / - / 186056		NORTHERN MIDLANDS		SOIL & WATER MANAGEMENT PLAN	4 / 26	1:200	714562

Exhibited

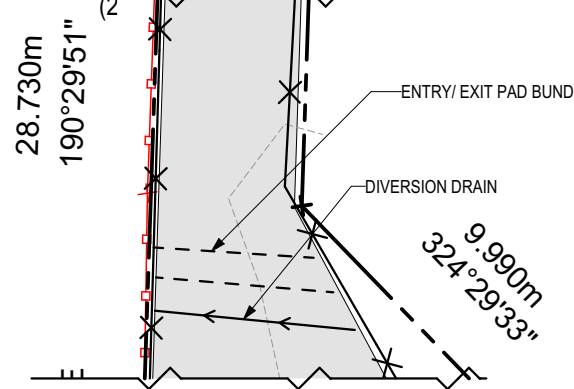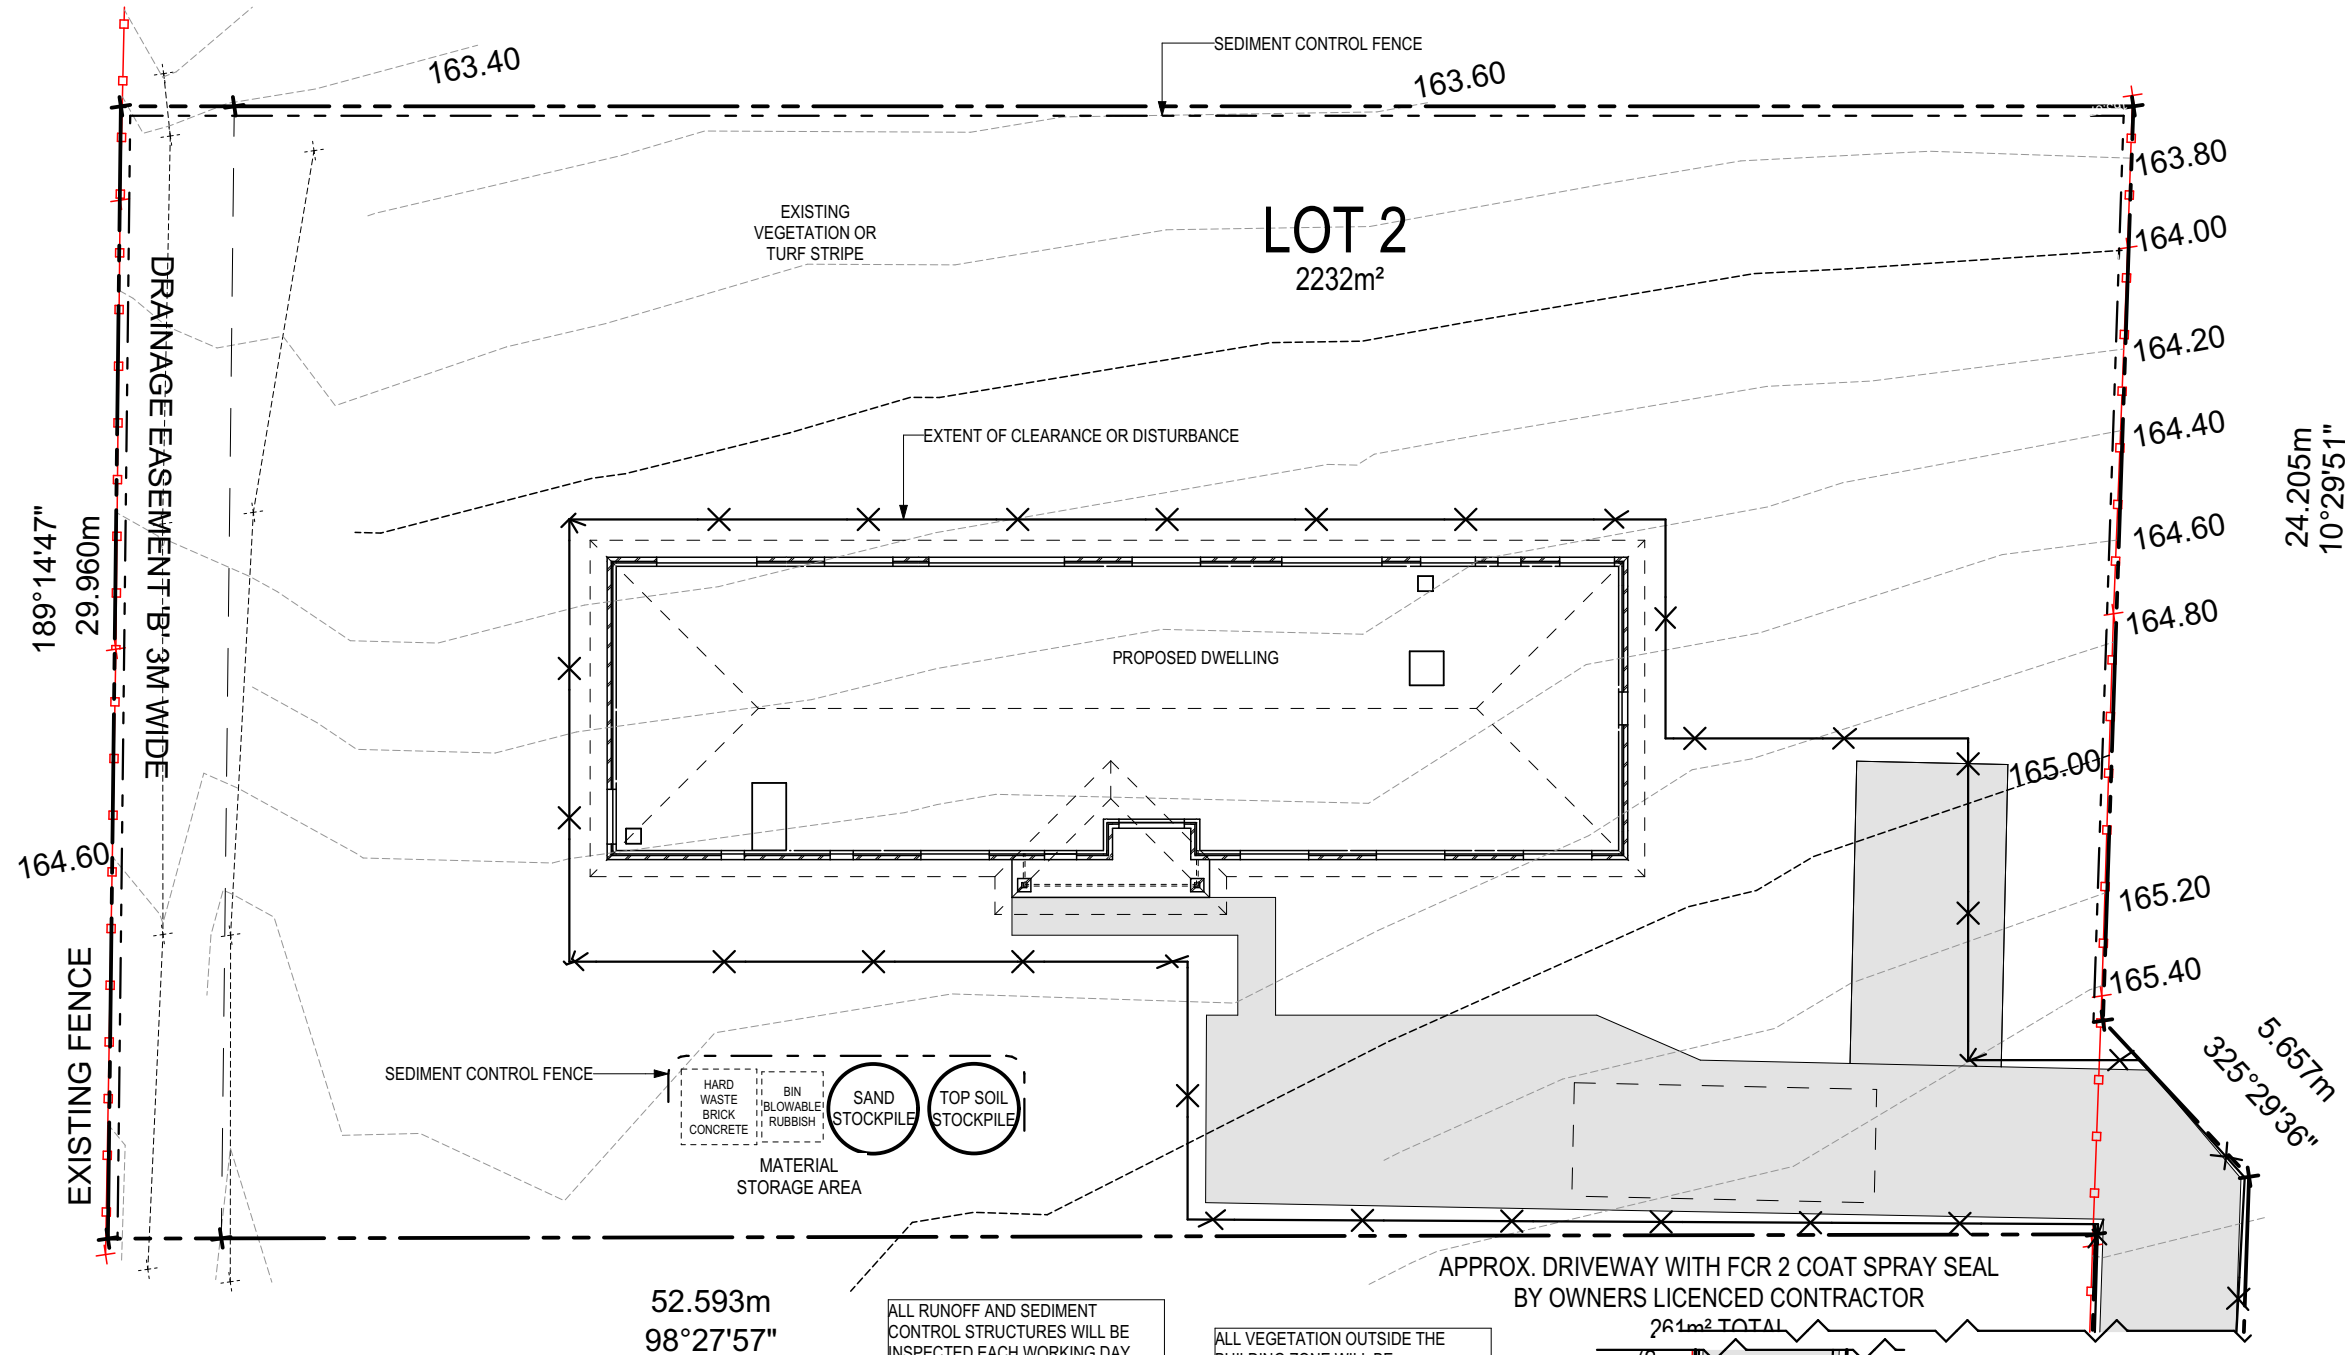

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED




ALL VEGETATION OUTSIDE THE BUILDING ZONE WILL BE MAINTAINED.

OWNER TO STABILISE THE SITE ON COMPLETION OF THE BUILD WITH TURF LAWNS, GRASS SEEDS, NATIVE GROUND COVERS AND/ OR MULCH SPREAD TO A DEPTH OF 75-100mm

THE FOLLOWING IS A STANDARD APPROACH. SEDIMENT AND EROSION CONTROL MEASURES WILL BE REVIEWED PRIOR TO COMMENCING WORK AND INSTALLED BASED ON THE OUTCOME OF THAT REVIEW.

- NOTES:
1. ALL EROSION AND SEDIMENT CONTROL STRUCTURES TO BE INSPECTED EACH WORKING DAY AND MAINTAINED IN GOOD WORKING ORDER.
 2. ALL GROUND COVER VEGETATION OUTSIDE THE IMMEDIATE BUILDING AREA TO BE PRESERVED DURING THE BUILDING PHASE.
 3. ALL EROSION AND SEDIMENT CONROL MEASURES TO BE INSTALLED PRIOR TO COMMENCEMENT OF MAJOR EARTHWORKS.
 4. STOCKPILES OF CLAYEY MATERIAL TO BE COVERED WITH AN IMPERVIOUS SHEET.
 5. ROOF WATER DOWNPIPES TO BE CONNECTED TO THE PERMAMENT UNDERGROUND STORMWATER DRAINAGE SYSTEM AS SOON AS PRACTICAL AFTER THE ROOF IS LAID.


6. DIVERSION DRAINS ARE TO BE CONNECTED TO A LEAGAL DISCHARGE POINT (COUNCIL STORMWATER SYSTEM, WATERCOURSE OR ROAD DRAIN).
7. SEDIMENT RETENTION TRAPS INSTALLED AROUND THE INLETS TO THE STORMWATER SYSTEM TO PREVENT SEDIMENT & OTHER DEBRIS BLOCKING THE DRAINS.

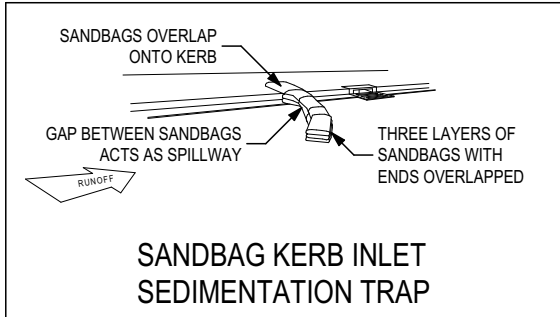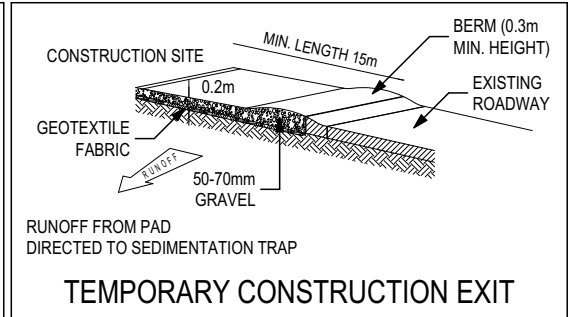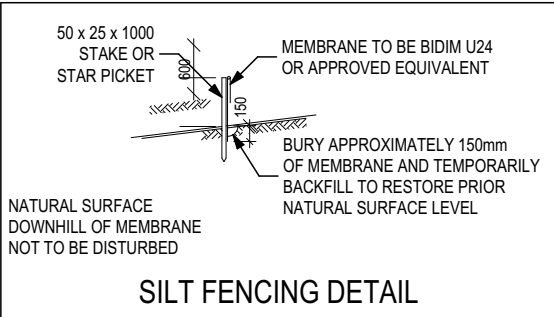

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.



SPECIFICATION:		REVISION		DRAWN		CLIENT:		HOUSE DESIGN:		HOUSE CODE:		DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.	
DESIGNER		7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC	28/03/2026	POOJA WIJERATNE & MENAKA DILSHAN		WOODBIDGE 24		H-WDNWBG10SA			
COPYRIGHT:		8	PRELIM PLANS - INITIAL ISSUE	TNG	23/04/2026	ADDRESS:		FACADE DESIGN:		FACADE CODE:			
© 2026		9	PRELIM PLANS - AMENDMENTS	PL1	07.05.2026	50 LOGAN RD, EVANDALE TAS 7212		CLASSIC		F-WDNWBG10CLASA			
		10	PRELIM PLANS- DRIVEWAY UPDATE	RT2	11/05/2026	LOT / SECTION / CT:		SHEET TITLE:		SHEET No.:			
		11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV	21/05/2026	2 / - / 186056		NORTHERN MIDLANDS		SOIL & WATER MANAGEMENT PLAN 1:500 5 / 26		SCALES: 1:500	714562

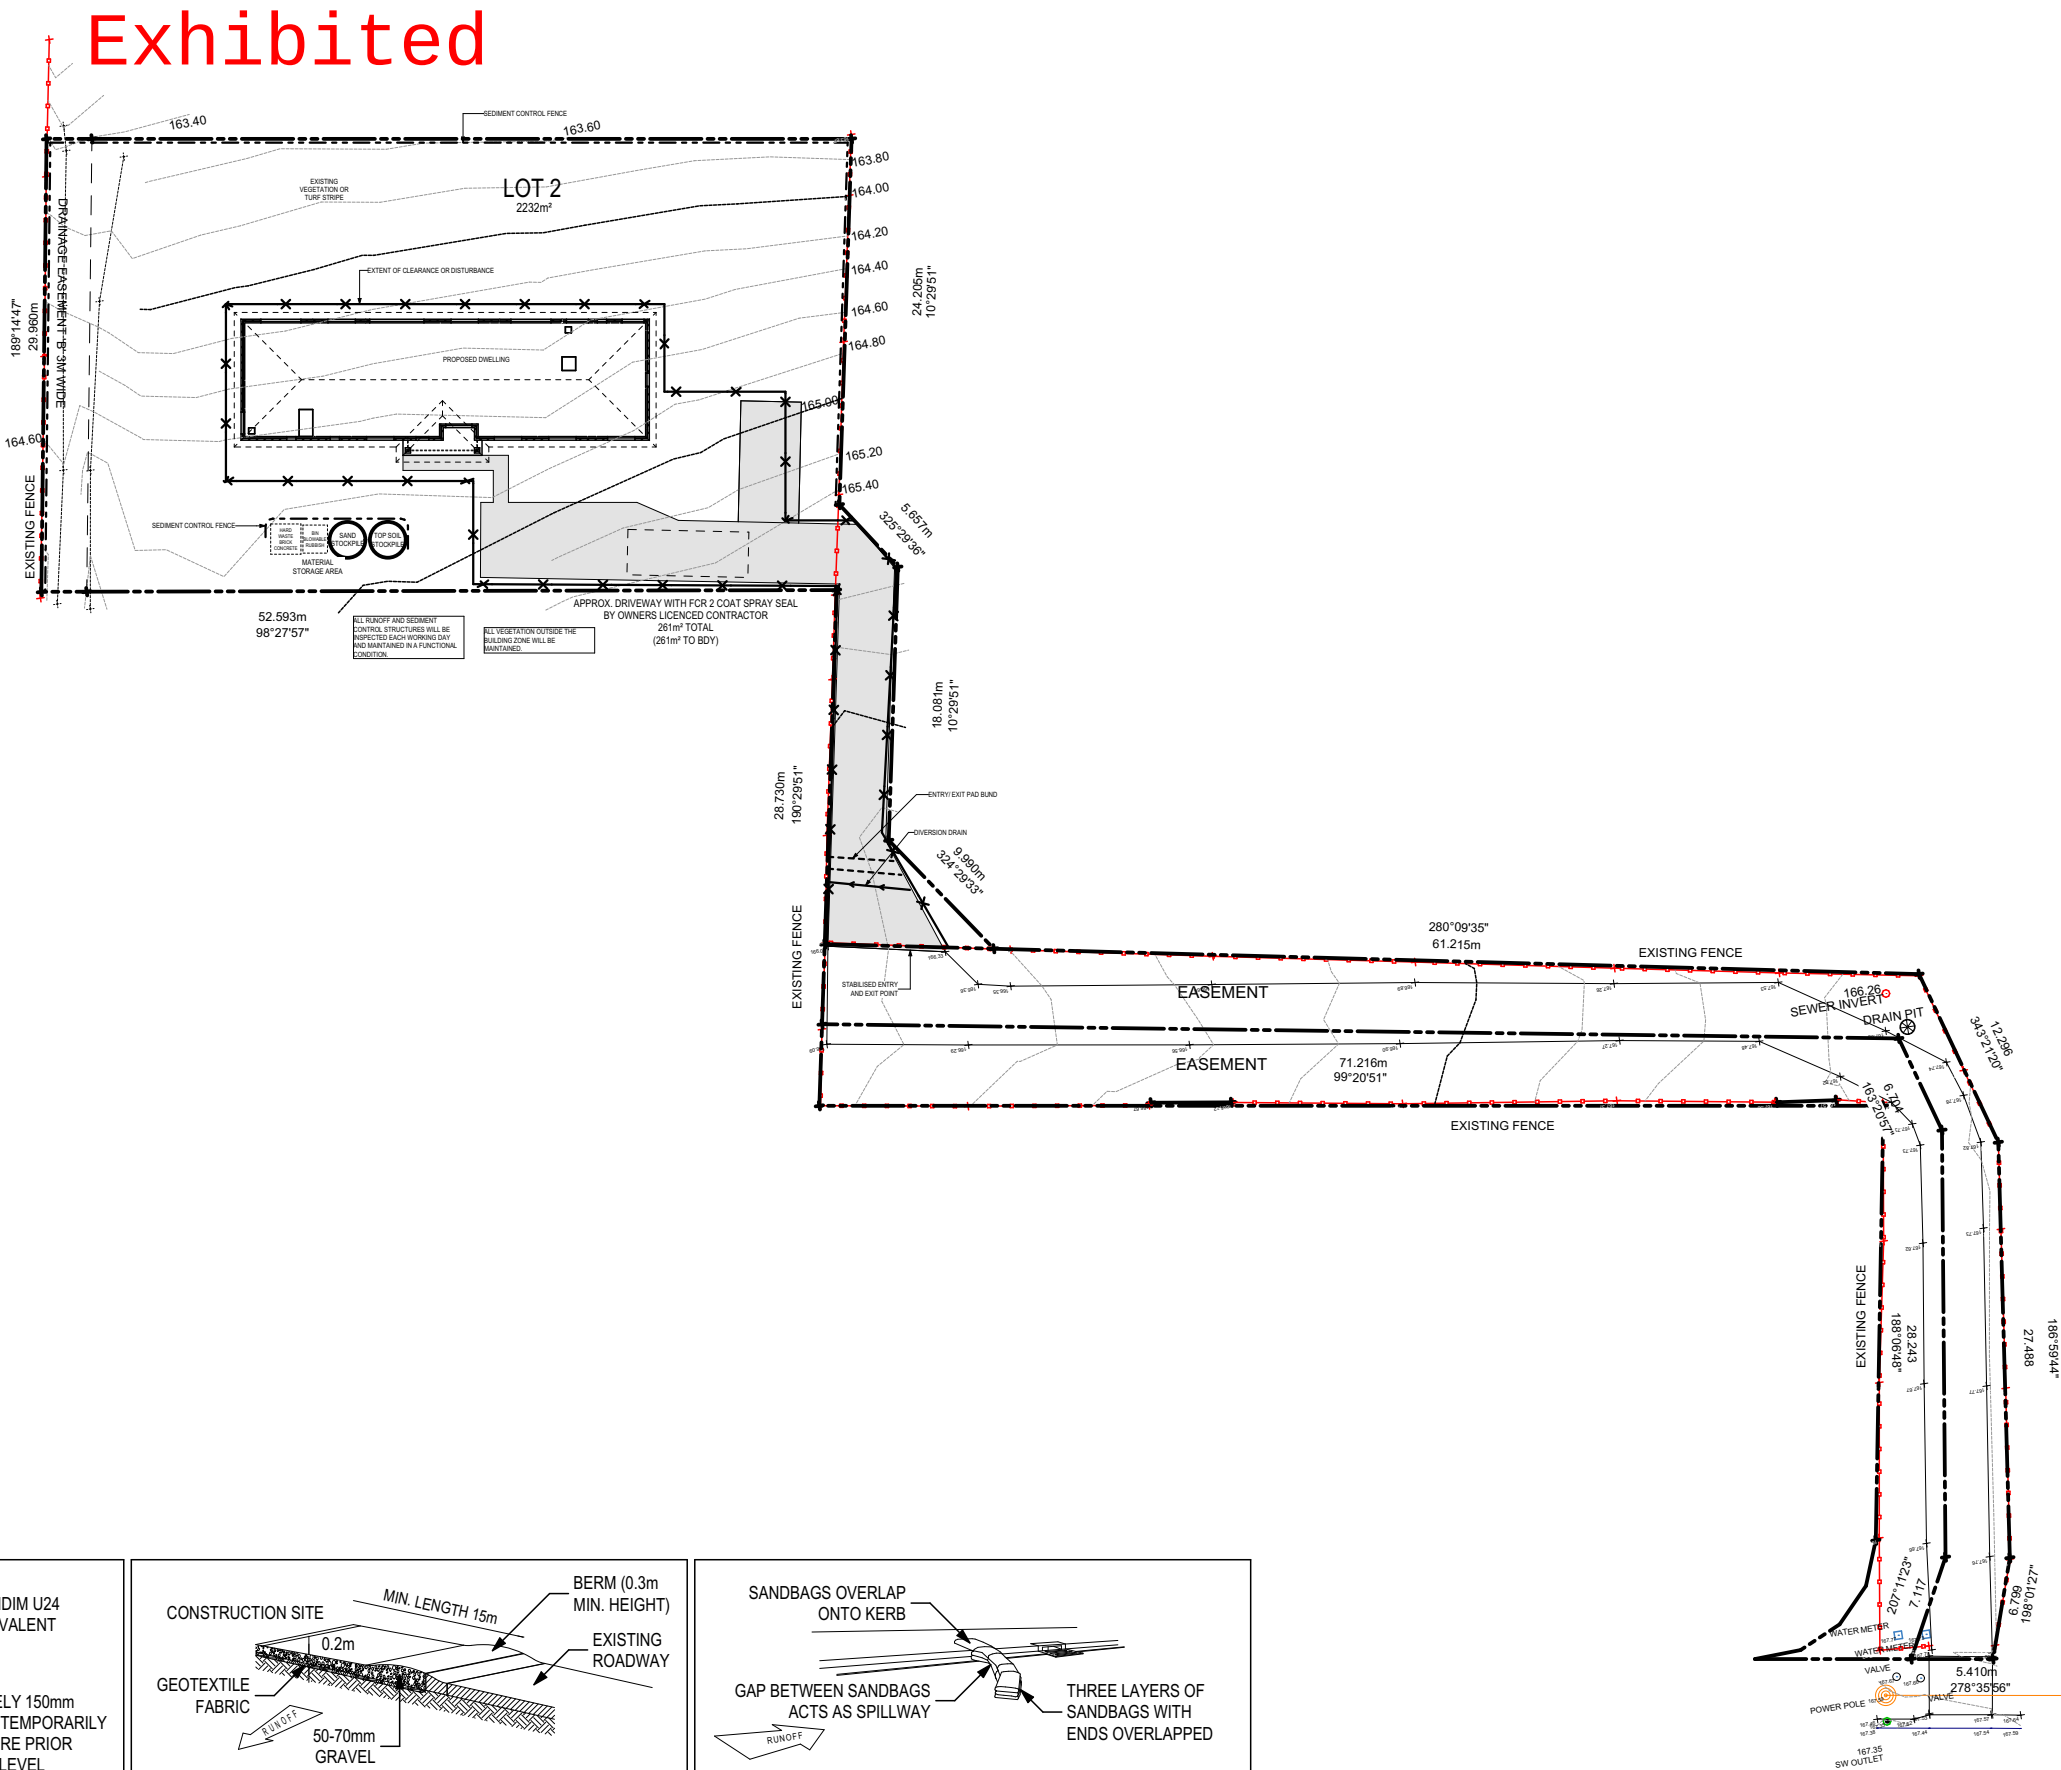

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE: _____ DATE: _____

SIGNATURE: _____ DATE: _____

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:
- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION

ALL MECHANICAL VENTILATION TO BE DISCHARGED TO OUTDOOR AIR AS PER NCC 2022 REQUIREMENTS

FIRE RESISTANT PLASTERBOARD TO BE INSTALLED BEHIND COOKTOP

ALL GROUND FLOOR BULKHEAD AND SQUARE SET OPENING FRAMES TO BE 2155 ABOVE FFL UNLESS NOTED OTHERWISE

FINAL WINDOW AND EXTERIOR DOOR LOCATIONS MAY BE ADJUSTED ON SITE TO SUIT BRICKWORK GAUGE


REFER TO WINDOW AND DOOR SCHEDULES FOR FULL DETAILS OF ALL WINDOWS AND DOORS. PLEASE NOTE WINDOW AND DOOR SIZES ARE BASED ON MANUFACTURERS SPECIFICATIONS AT DEPOSIT STAGE AND MAY DIFFER SLIGHTLY TO THE SIZES NOMINATED IN THE SCOPE OF WORKS DUE TO MANUFACTURING CHANGES AT THE TIME OF CONSTRUCTION.

UNLESS NOTED OTHERWISE ALL ROOMS ARE REFERENCED AS FOLLOWS:



MAIN DWELLING, GROUND FLOOR


LIVING	214.28
PORCH	6.95
	221.23 m²

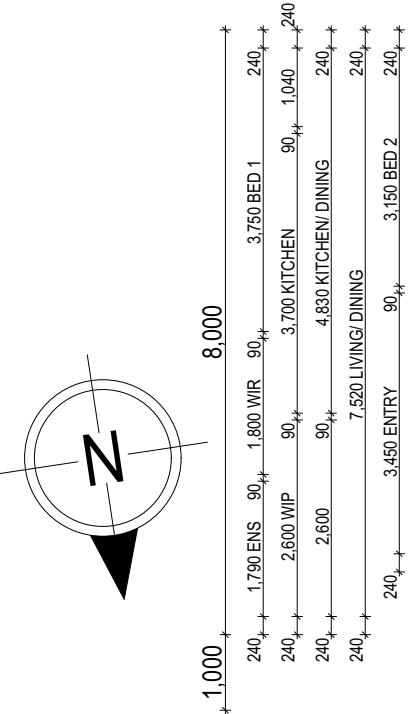

LEGEND

HS / WS	HOB SPOUT / WALL SPOUT
	FACE BRICK / COMMON BRICK
	RENDER
	SOUND INSULATION
AJ	BRICK ARTICULATION JOINT
SDP	STANDARD DOWNSPIPE
CDP	CHARGED DOWNSPIPE
3D	DENOTES DRAWER SIDE
	MECHANICAL VENTILATION
L.B.W	LOAD BEARING WALL
PB	PLASTERBOARD
FC	FIBRE CEMENT
	THIS DOOR OPENS FIRST
	SMOKE ALARM
#	LIFT OFF HINGE
+	WATER POINT
	FLOOR WASTE
	GAS BAYONET

Exhibited

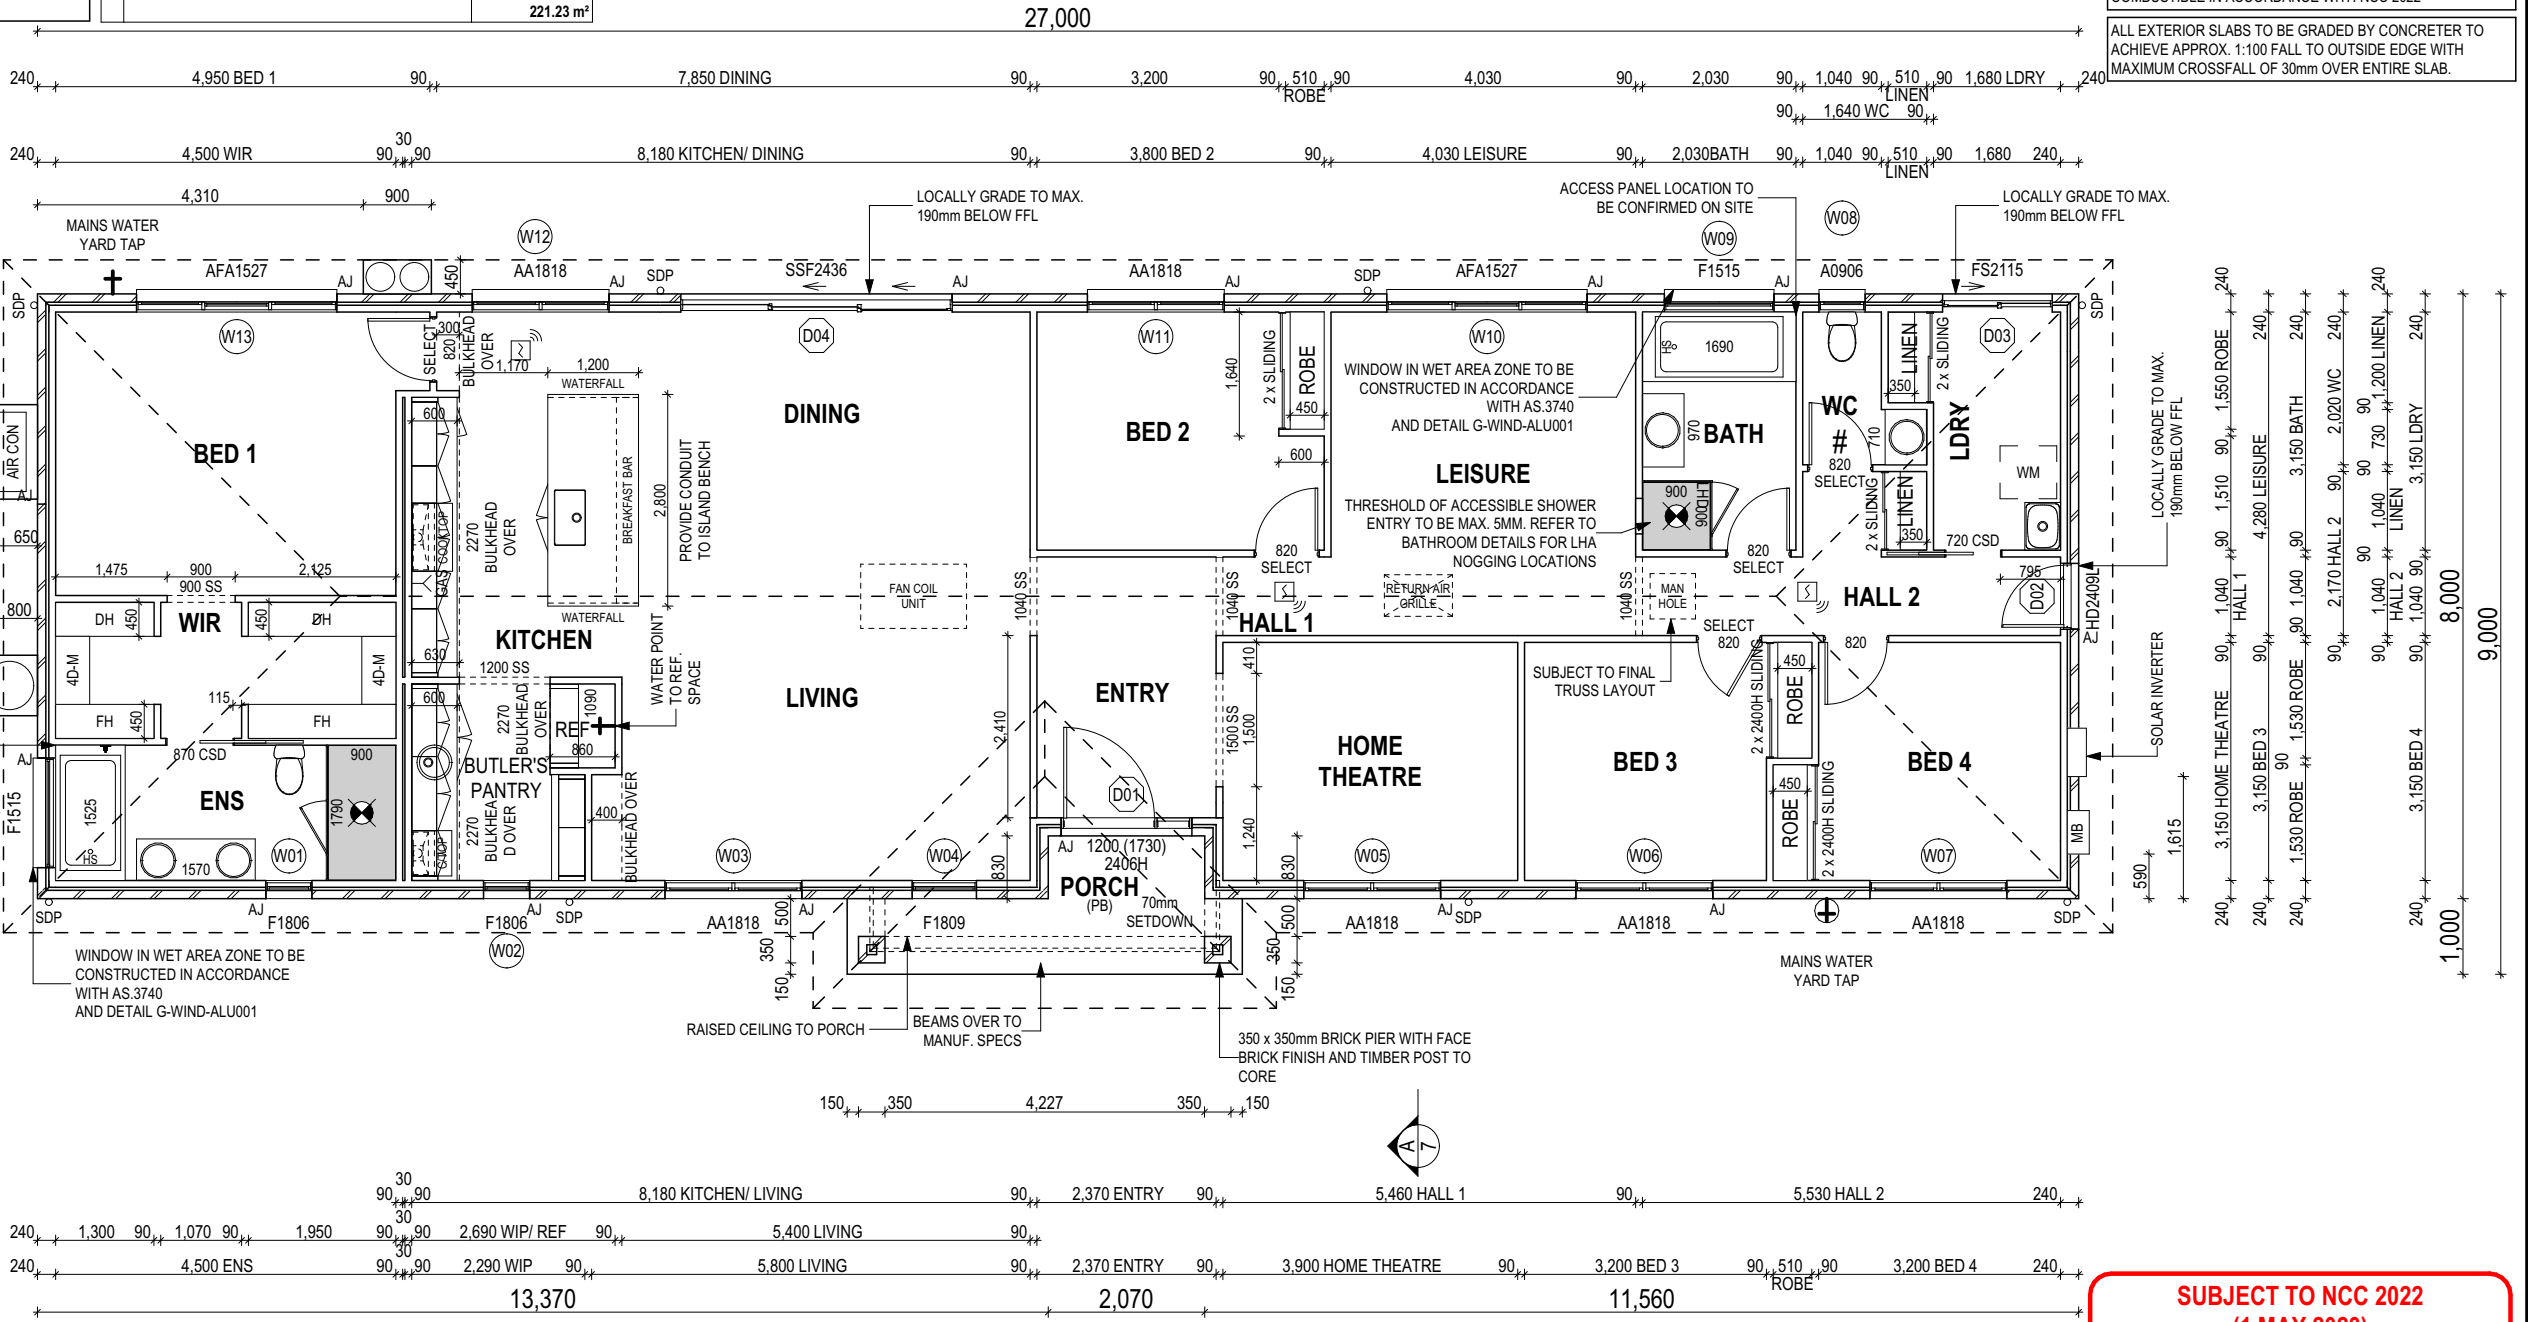

**SUBJECT TO NCC 2022
(1 MAY 2023)**
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE:	DATE:
SIGNATURE:	DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

ALL DIMENSIONS ARE FRAME DIMENSIONS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.



SPECIFICATION:	DESIGNER	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC	28/03/2026	CLIENT:	POOJA WIJERATNE & MENAKA DILSHAN	HOUSE DESIGN:	WOODBIDGE 24	HOUSE CODE:	H-WDNWBG10SA	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
COPYRIGHT:	© 2026	8	PRELIM PLANS - INITIAL ISSUE	TNG	23/04/2026	ADDRESS:	50 LOGAN RD, EVANDALE TAS 7212	FACADE DESIGN:	CLASSIC	FACADE CODE:	F-WDNWBG10CLASA	
		9	PRELIM PLANS - AMENDMENTS	PL1	07.05.2026	LOT / SECTION / CT:	2 / - / 186056	SHEET TITLE:	GROUND FLOOR PLAN	SHEET No.:	6 / 26	
		10	PRELIM PLANS - DRIVEWAY UPDATE	RT2	11/05/2026	COUNCIL:	NORTHERN MIDLANDS			SCALES:	1:100	
		11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV	21/05/2026							714562

REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:

- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION


SOME DETAILS ON THIS SHEET ARE INDICATIVE ONLY FOR EXAMPLE BRICKWORK AND CLADDING (EXPANSION JOINTS, ORIENTATION AND LAYOUT) AND ARE SUBJECT TO CHANGE.

SH = SNAP HEADER SILL


BEDROOM WINDOW OPENINGS ABOVE 2m OFF THE SURFACE BENEATH TO BE RESTRICTED AS REQUIRED BY NCC 11.3.7 (VOLUME TWO)

ROOMS OTHER THAN BEDROOM WINDOW OPENINGS ABOVE 4m OFF THE SURFACE BENEATH TO BE RESTRICTED AS REQUIRED BY NCC 11.3.7 (VOLUME TWO)


REFER TO THE FOLLOWING DETAILS:
BRICK COURSING **W-BRIC-001**

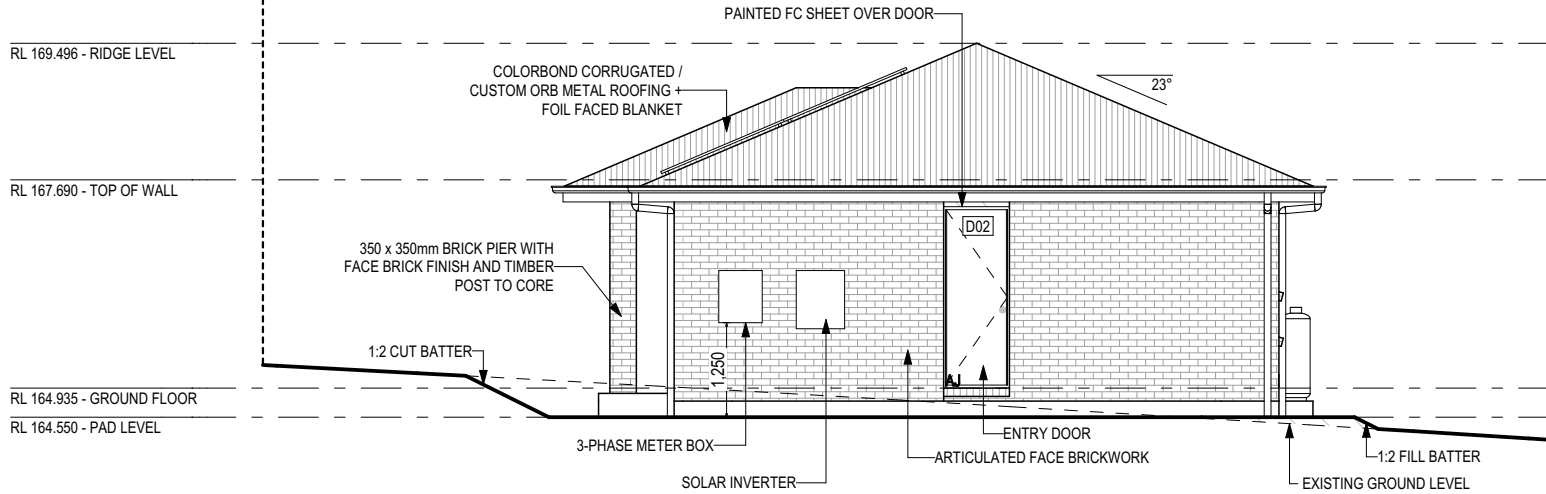

WEST ELEVATION
SCALE: 1:100

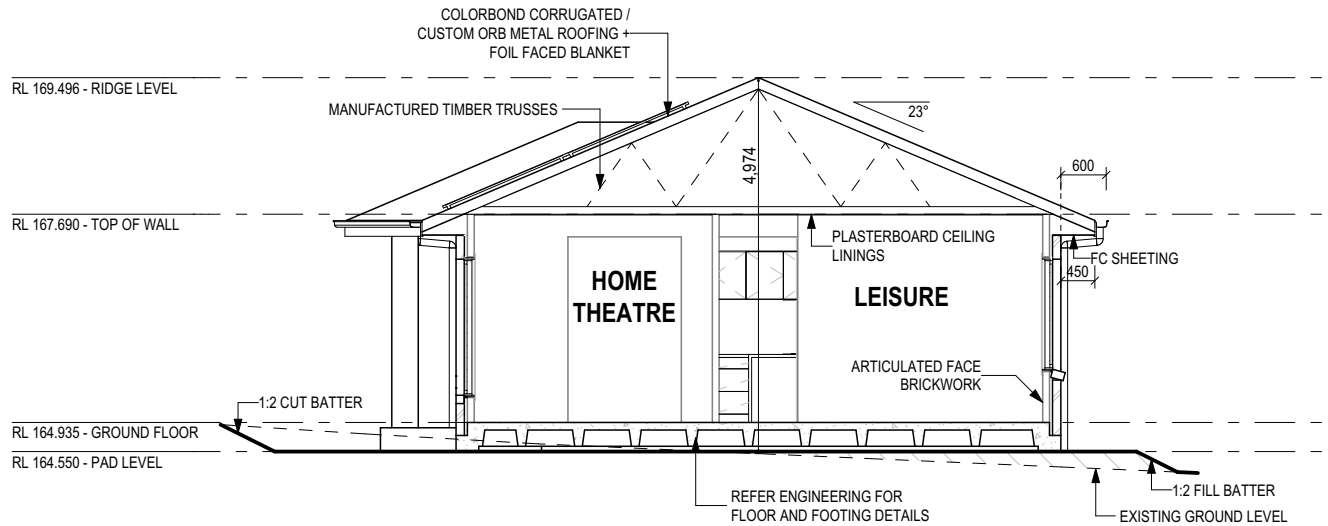


SECTION A-A
SCALE: 1:100

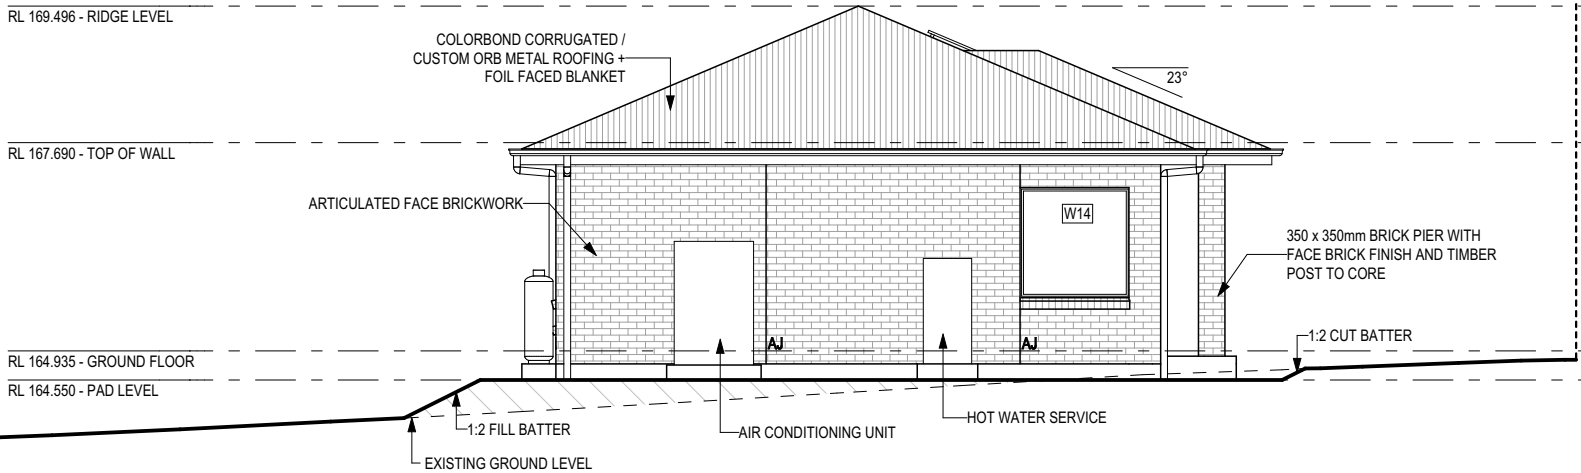


EAST ELEVATION
SCALE: 1:100

**SUBJECT TO NCC 2022
(1 MAY 2023)**
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

GLASS TYPE LEGEND



WINDOW TYPE LEGEND



PLAN ACCEPTANCE BY OWNER


SIGNATURE: _____ DATE: _____

SIGNATURE: _____ DATE: _____


PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

SPECIFICATION:	DESIGNER	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC	28/03/2026	CLIENT:	POOJA WIJERATNE & MENAKA DILSHAN	HOUSE DESIGN:	WOODBIDGE 24	HOUSE CODE:	H-WDNWBG10SA	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
COPYRIGHT:	© 2026	8	PRELIM PLANS - INITIAL ISSUE	TNG	23/04/2026	ADDRESS:	50 LOGAN RD, EVANDALE TAS 7212	FACADE DESIGN:	CLASSIC	FACADE CODE:	F-WDNWBG10CLASA	
		9	PRELIM PLANS - AMENDMENTS	PL1	07.05.2026	LOT / SECTION / CT:	2 / - / 186056	SHEET TITLE:	ELEVATIONS / SECTION	SHEET No.:	7 / 26	
		10	PRELIM PLANS - DRIVEWAY UPDATE	RT2	11/05/2026	COUNCIL:	NORTHERN MIDLANDS	SCALES:	1:100			714562
		11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV	21/05/2026							

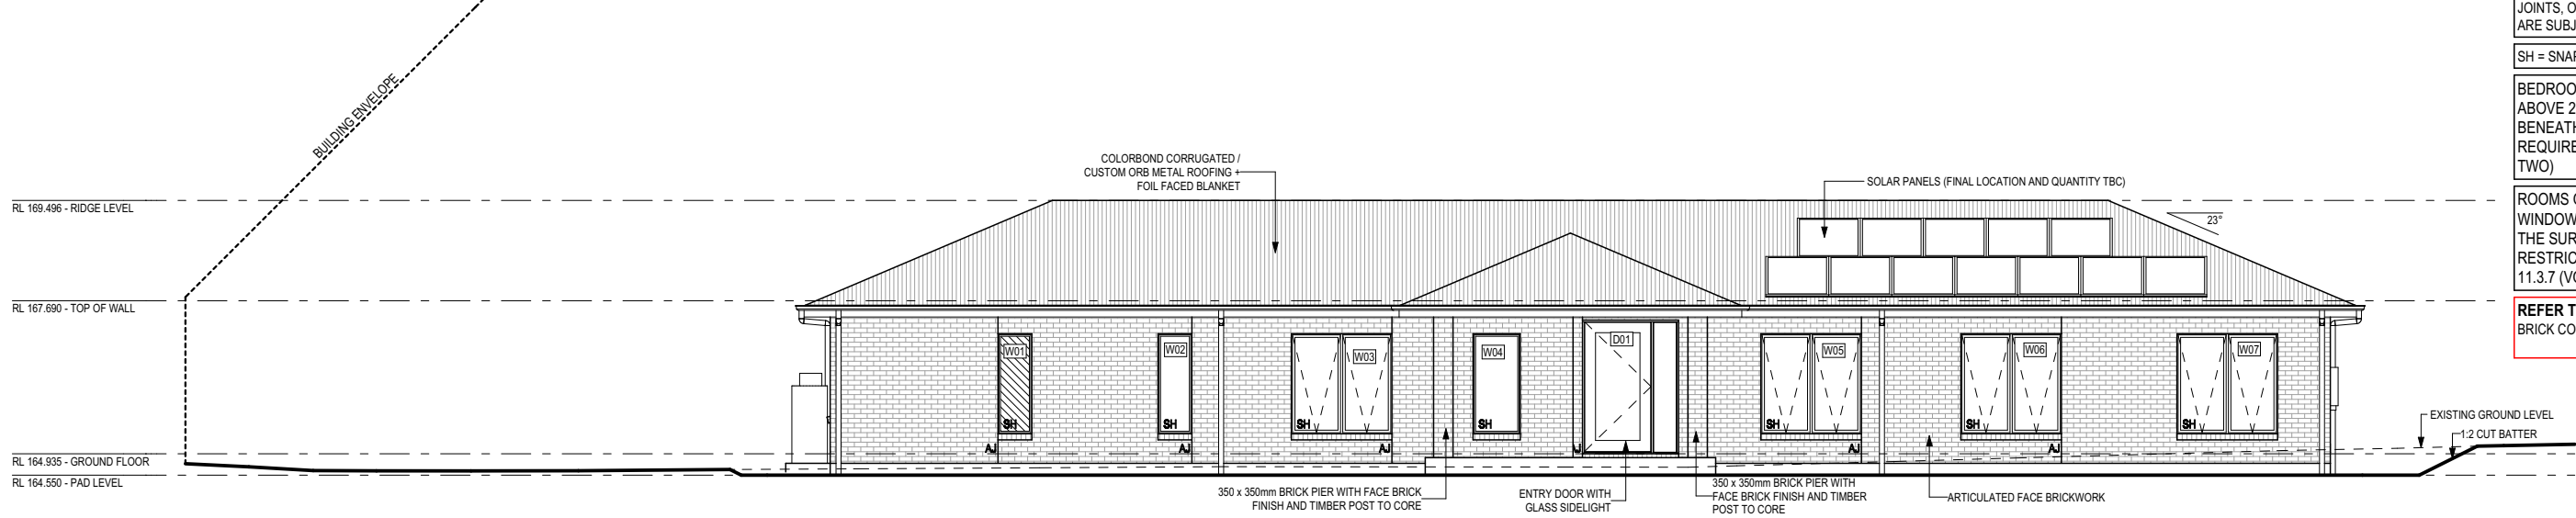


NORTH ELEVATION
SCALE: 1:125

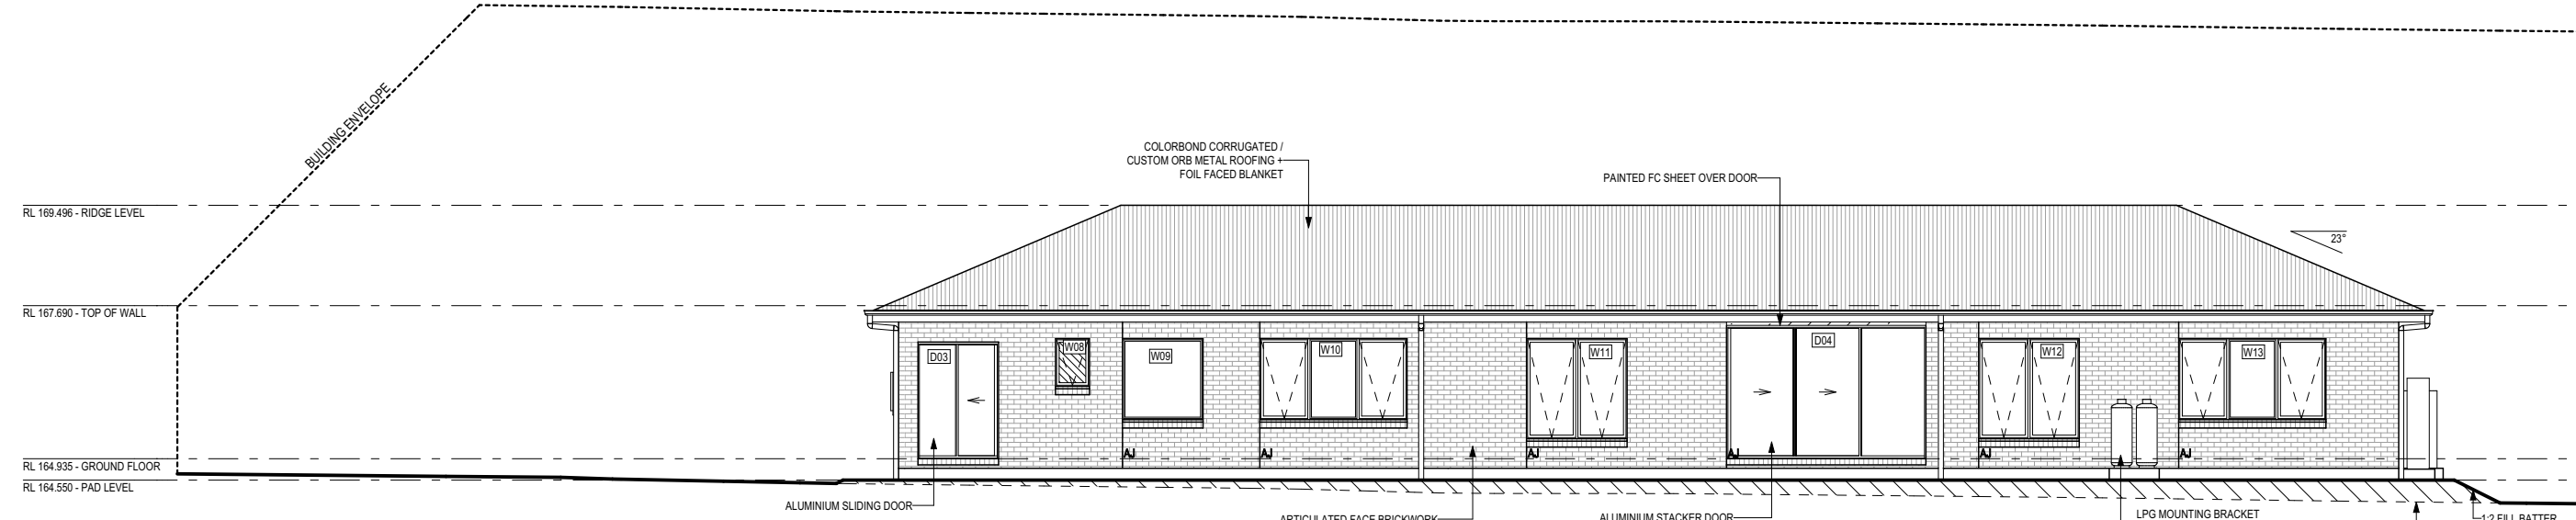


SOUTH ELEVATION
SCALE: 1:125

**SUBJECT TO NCC 2022
(1 MAY 2023)**
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

GLASS TYPE LEGEND



WINDOW TYPE LEGEND



PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

EXTERIOR WINDOW & DOOR SCHEDULE
 ^{1,2} ASSUME LOOKING FROM OUTSIDE

STOREY	ID	CODE¹	TYPE	ROOM	HEIGHT	WIDTH	PERIMETER	AREA (m²)	FRAME TYPE	BAL RATING	SILL TYPE	ORIENT.	GLAZING AREA (m²)	GLAZING TYPE (SINGLE GLAZING U.N.O.)	ADDITIONAL INFORMATION²
WINDOW															
GROUND FLOOR	W01	F1806	FIXED	ENS	1,800	610	4,820	1.10	ALUMINIUM	BAL-12.5	SNAP HEADER	N	0.93	OBSCURE, DOUBLE GLAZED, TOUGHENED	
GROUND FLOOR	W02	F1806	FIXED	BUTLER'S PANTRY	1,800	610	4,820	1.10	ALUMINIUM	BAL-12.5	SNAP HEADER	N	0.93	CLEAR, DOUBLE GLAZED	
GROUND FLOOR	W03	AA1818	AWNING	LIVING	1,800	1,810	7,220	3.26	ALUMINIUM	BAL-12.5	SNAP HEADER	N	2.60	CLEAR, DOUBLE GLAZED	MP 905
GROUND FLOOR	W04	F1809	FIXED	LIVING	1,800	850	5,300	1.53	ALUMINIUM	BAL-12.5	SNAP HEADER	N	1.34	CLEAR, DOUBLE GLAZED	
GROUND FLOOR	W05	AA1818	AWNING	HOME THEATRE	1,800	1,810	7,220	3.26	ALUMINIUM	BAL-12.5	SNAP HEADER	N	2.60	CLEAR, DOUBLE GLAZED	MP 905
GROUND FLOOR	W06	AA1818	AWNING	BED 3	1,800	1,810	7,220	3.26	ALUMINIUM	BAL-12.5	SNAP HEADER	N	2.60	CLEAR, DOUBLE GLAZED	MP 905
GROUND FLOOR	W07	AA1818	AWNING	BED 4	1,800	1,810	7,220	3.26	ALUMINIUM	BAL-12.5	SNAP HEADER	N	2.60	CLEAR, DOUBLE GLAZED	MP 905
GROUND FLOOR	W08	A0906	AWNING	WC	857	610	2,934	0.52	ALUMINIUM	BAL-12.5	ANGLED	S	0.35	OBSCURE, DOUBLE GLAZED, TOUGHENED	
GROUND FLOOR	W09	F1515	FIXED	BATH	1,457	1,450	5,814	2.11	ALUMINIUM	BAL-12.5	ANGLED	S	1.91	CLEAR, DOUBLE GLAZED	
GROUND FLOOR	W10	AFA1527	AWNING	LEISURE	1,457	2,650	8,214	3.86	ALUMINIUM	BAL-12.5	ANGLED	S	3.14	CLEAR, DOUBLE GLAZED	MP 883-883
GROUND FLOOR	W11	AA1818	AWNING	BED 2	1,800	1,810	7,220	3.26	ALUMINIUM	BAL-12.5	ANGLED	S	2.60	CLEAR, DOUBLE GLAZED	MP 905
GROUND FLOOR	W12	AA1818	AWNING	DINING	1,800	1,810	7,220	3.26	ALUMINIUM	BAL-12.5	ANGLED	S	2.60	CLEAR, DOUBLE GLAZED	MP 905
GROUND FLOOR	W13	AFA1527	AWNING	BED 1	1,457	2,650	8,214	3.86	ALUMINIUM	BAL-12.5	ANGLED	S	3.14	CLEAR, DOUBLE GLAZED	MP 883-883
GROUND FLOOR	W14	F1515	FIXED	ENS	1,457	1,450	5,814	2.11	ALUMINIUM	BAL-12.5	ANGLED	E	1.91	CLEAR, DOUBLE GLAZED	
							89,250 mm	35.74					29.26		
DOOR															
GROUND FLOOR	D01	1200	SWINGING	ENTRY	2,406	1,730	8,272	4.16	TIMBER	BAL-12.5	SNAP HEADER	N	---	DOOR(S): CLEAR - SIDELIGHT(S): CLEAR	LEAF SIZE: 2340 x 1200mm
GROUND FLOOR	D02	HD2409L	SWINGING	HALL 2	2,400	870	6,540	2.09	ALUMINIUM	BAL-12.5	SNAP HEADER	W	1.41	NA	
GROUND FLOOR	D03	FS2115	SLIDING	LDRY	2,100	1,450	7,100	3.05	ALUMINIUM	BAL-12.5	SNAP HEADER	S	2.59	CLEAR, DOUBLE GLAZED, TOUGHENED	
GROUND FLOOR	D04	SSF2436	STACKER	DINING	2,400	3,588	11,976	8.61	ALUMINIUM	BAL-12.5	SNAP HEADER	S	7.77	CLEAR, DOUBLE GLAZED, TOUGHENED	
							33,888 mm	17.91					11.77		
							123,138 mm	53.65					41.04		

Exhibited

NOTE:
Provide BAL-12.5 rated aluminium windows and external glass sliding doors in lieu of standard.

Provide flyscreens with corrosion resistant mesh to all opening window sashes only.

Window Manufacturer: Dowell Windows			
No BAL / BAL 12.5 Window Type Sliding Window Awning Window Fixed External Window Sliding Door Stacking Door Hinged Door Bi-Fold Door	WERS Code	U Value	SHGC
	DOW-022-003	2.9	0.64
	DOW-005-001	3.9	0.58
	DOW-038-001	3.03	0.71
	DAR-034-001	3.97	0.63
	DAR-034-001	3.97	0.63
	DOW-017-001	4.1	0.55
	DOW-020-001	4.1	0.54
BAL 19 Window Type Sliding Window Awning Window Fixed External Window Sliding Door Stacking Door Hinged Door Bi-Fold Door	WERS Code	U Value	SHGC
	TND-034-001	3.1	0.61
	STG-001-066	3.91	0.54
	DOW-038-005	3.02	0.66
	AUW-009-009	4.03	0.58
	AUW-009-009	4.03	0.58
	GRN-009-001	4.25	0.53
	DOW-020-001	4.1	0.54
BAL 29 Window Type Sliding Window Awning Window Fixed External Window Sliding Door Stacking Door Hinged Door	WERS Code	U Value	SHGC
	TND-034-001	3.1	0.61
	STG-001-066	3.91	0.54
	DOW-038-005	3.02	0.66
	AMJ-007-005	4.03	0.59
	AMJ-007-005	4.03	0.59
	GRN-009-001	4.29	0.53
NOTE: Windows supplied MUST HAVE Uw better and or equal to stated figures and SHGC within +/- 5% of stated figures. Restricted windows to have their openability restricted as per N.C.C 11.3.6.			

PICTURE, TV RECESS AND SS WINDOW OPENINGS

QTY	TYPE	HEIGHT	WIDTH	AREA (m²)
-----	------	--------	-------	-----------

INTERIOR WINDOW & DOOR SCHEDULE

STOREY	QTY	CODE	TYPE	HEIGHT	WIDTH	GLAZING TYPE	ADDITIONAL INFORMATION
DOOR							
GROUND FLOOR	3	1040 SS	SQUARE SET OPENING	2,455	1,040	N/A	
GROUND FLOOR	1	1200 SS	SQUARE SET OPENING	2,455	1,200	N/A	
GROUND FLOOR	1	1500 SS	SQUARE SET OPENING	2,455	1,500	N/A	
GROUND FLOOR	2	2 x 2400H SLIDING	SLIDING	2,400	1,530	N/A	
GROUND FLOOR	1	2 x SLIDING	SLIDING	2,400	1,550	N/A	
GROUND FLOOR	1	2 x SLIDING	SLIDING	2,400	1,040	N/A	
GROUND FLOOR	1	2 x SLIDING	SLIDING	2,400	1,200	N/A	
GROUND FLOOR	1	720 CSD	CAVITY SLIDING	2,340	720	N/A	
GROUND FLOOR	1	820	SWINGING	2,340	820	CLEAR	SELECT, LIFT-OFF HINGES
GROUND FLOOR	4	820	SWINGING	2,340	820	CLEAR	SELECT
GROUND FLOOR	1	820	SWINGING	2,340	820	N/A	
GROUND FLOOR	1	870 CSD	CAVITY SLIDING	2,340	870	N/A	
GROUND FLOOR	1	900 SS	SQUARE SET OPENING	2,455	900	N/A	

REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:

- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

NOTE: INTERNAL DOORS TO WET AREAS WITH MECHANICAL VENTILATION TO BE UNDERCUT 20mm

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

**SUBJECT TO NCC 2022
(1 MAY 2023)**
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE: _____ DATE: _____

SIGNATURE: _____ DATE: _____

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED



SPECIFICATION:		REVISION	DRAWN	CLIENT:		HOUSE DESIGN:		HOUSE CODE:		DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
DESIGNER	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC 28/03/2026	POOJA WIJERATNE & MENAKA DILSHAN		WOODBRIDGE 24		H-WDNWBG10SA		
COPYRIGHT:	8	PRELIM PLANS - INITIAL ISSUE	TNG 23/04/2026	ADDRESS:		FACADE DESIGN:		FACADE CODE:		
© 2026	9	PRELIM PLANS - AMENDMENTS	PL1 07.05.2026	50 LOGAN RD, EVANDALE TAS 7212		CLASSIC		F-WDNWBG10CLASA		
	10	PRELIM PLANS- DRIVEWAY UPDATE	RT2 11/05/2026	LOT / SECTION / CT:	COUNCIL:	SHEET TITLE:		SHEET No.:	SCALES:	
	11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV 21/05/2026	2 / - / 186056	NORTHERN MIDLANDS	WINDOW & DOOR SCHEDULES		9 / 26		714562

NATURAL LIGHT AND VENTILATION

ROOM	AREA (m2)	WINDOW ID	LIGHT REQUIRED (m2)	LIGHT ACHIEVED (m2)	VENTILATION REQ`D (m2)	VENTILATION ACH`D (m2)
OPEN KITCHEN/ LIVING/ DINING	54.20 m²	W03, W04, W12, D04	5.42 m²	14.31 m²	2.71 m²	11.50 m²
BED 1	17.34 m²	W13	1.73 m²	3.14 m²	0.87 m²	2.40 m²
BED 2	11.78 m²	W11	1.18 m²	2.60 m²	0.59 m²	3.04 m²
BED 3	10.86 m²	W06	1.09 m²	2.60 m²	0.54 m²	3.04 m²
BED 4	10.86 m²	W07	1.09 m²	2.60 m²	0.54 m²	3.04 m²
LEISURE	17.25 m²	W10	1.73 m²	3.14 m²	0.86 m²	2.40 m²

PART 10.5.1 LIGHT: Minimum 10% of the floor area of a habitable room required (natural light)

PART 10.6 VENTILATION: Minimum 5% of the floor area of a habitable room required. (An exhaust fan may be used for sanitary compartment, laundry or bathroom provided contaminated air discharges directly to the outside of the building by way of ducts).

Exhibited

REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:
- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER


SIGNATURE: DATE:

SIGNATURE: DATE:


PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED



SPECIFICATION:		REVISION	DRAWN	CLIENT:	HOUSE DESIGN:	HOUSE CODE:	DO NOT SCALE DRAWINGS, USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE. 714562
DESIGNER	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC 28/03/2026	POOJA WIJERATNE & MENAKA DILSHAN	WOODBIDGE 24	H-WDNWBG10SA	
COPYRIGHT:	8	PRELIM PLANS - INITIAL ISSUE	TNG 23/04/2026	ADDRESS:	FACADE DESIGN:	FACADE CODE:	
© 2026	9	PRELIM PLANS - AMENDMENTS	PL1 07.05.2026	50 LOGAN RD, EVANDALE TAS 7212	CLASSIC	F-WDNWBG10CLASA	
	10	PRELIM PLANS- DRIVEWAY UPDATE	RT2 11/05/2026	LOT / SECTION / CT:	SHEET TITLE:	SCALES:	
	11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV 21/05/2026	2 / - / 186056	COUNCIL: NORTHERN MIDLANDS	SHEET No.: 10 / 26	

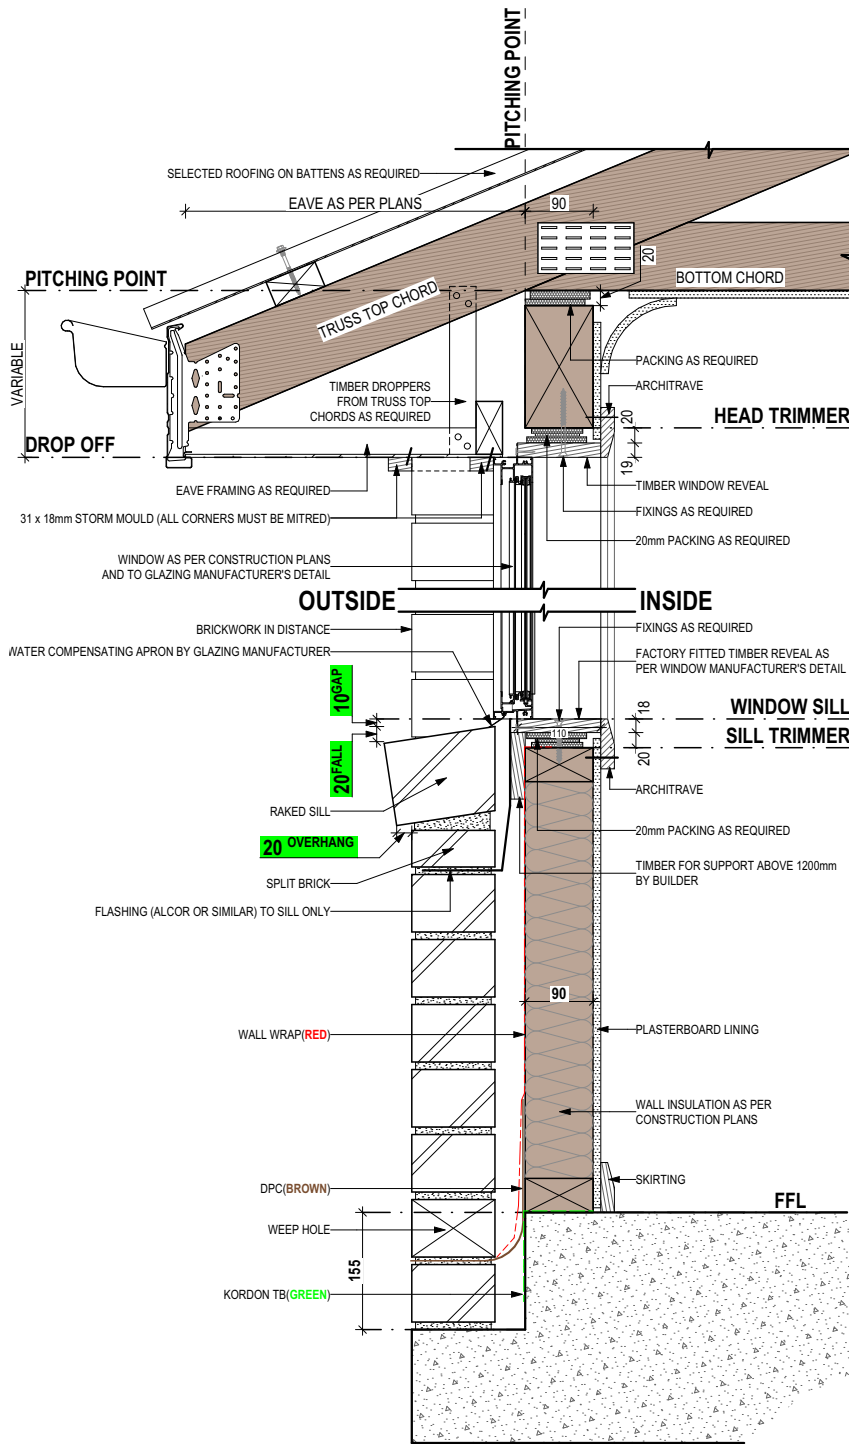

SECTIONS
SCALE: 1:10

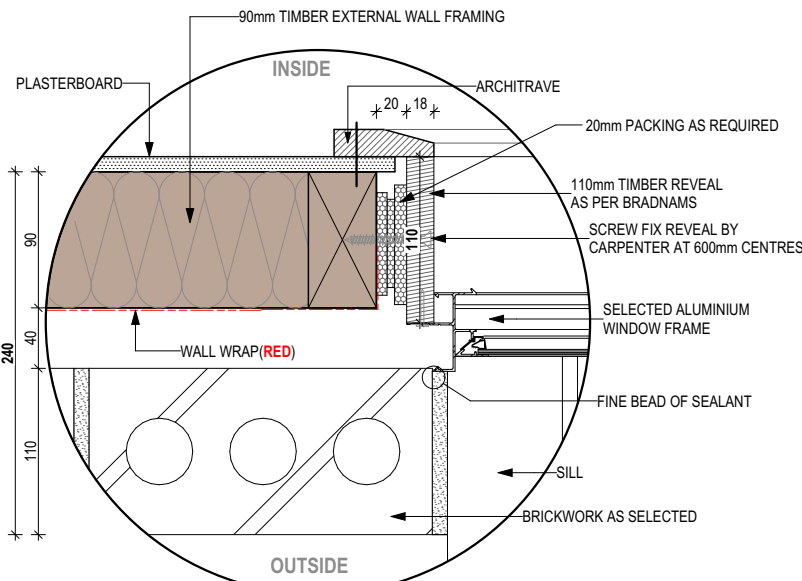

DETAILS
SCALE: 1:5

**SUBJECT TO NCC 2022
(1 MAY 2023)**
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE: _____ DATE: _____

SIGNATURE: _____ DATE: _____

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:

- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION


BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.



SPECIFICATION:	DESIGNER	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC	28/03/2026	CLIENT:	POOJA WIJERATNE & MENAKA DILSHAN	HOUSE DESIGN:	WOODBIDGE 24	HOUSE CODE:	H-WDNWBG10SA	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
COPYRIGHT:	© 2026	8	PRELIM PLANS - INITIAL ISSUE	TNG	23/04/2026	ADDRESS:	50 LOGAN RD, EVANDALE TAS 7212	FACADE DESIGN:	CLASSIC	FACADE CODE:	F-WDNWBG10CLASA	
		9	PRELIM PLANS - AMENDMENTS	PL1	07.05.2026	LOT / SECTION / CT:		SHEET TITLE:	DETAILS (FACE BRICKWORK)	SHEET No.:	11 / 26	
		10	PRELIM PLANS - DRIVEWAY UPDATE	RT2	11/05/2026	COUNCIL:	NORTHERN MIDLANDS					
		11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV	21/05/2026							714562

Exhibited

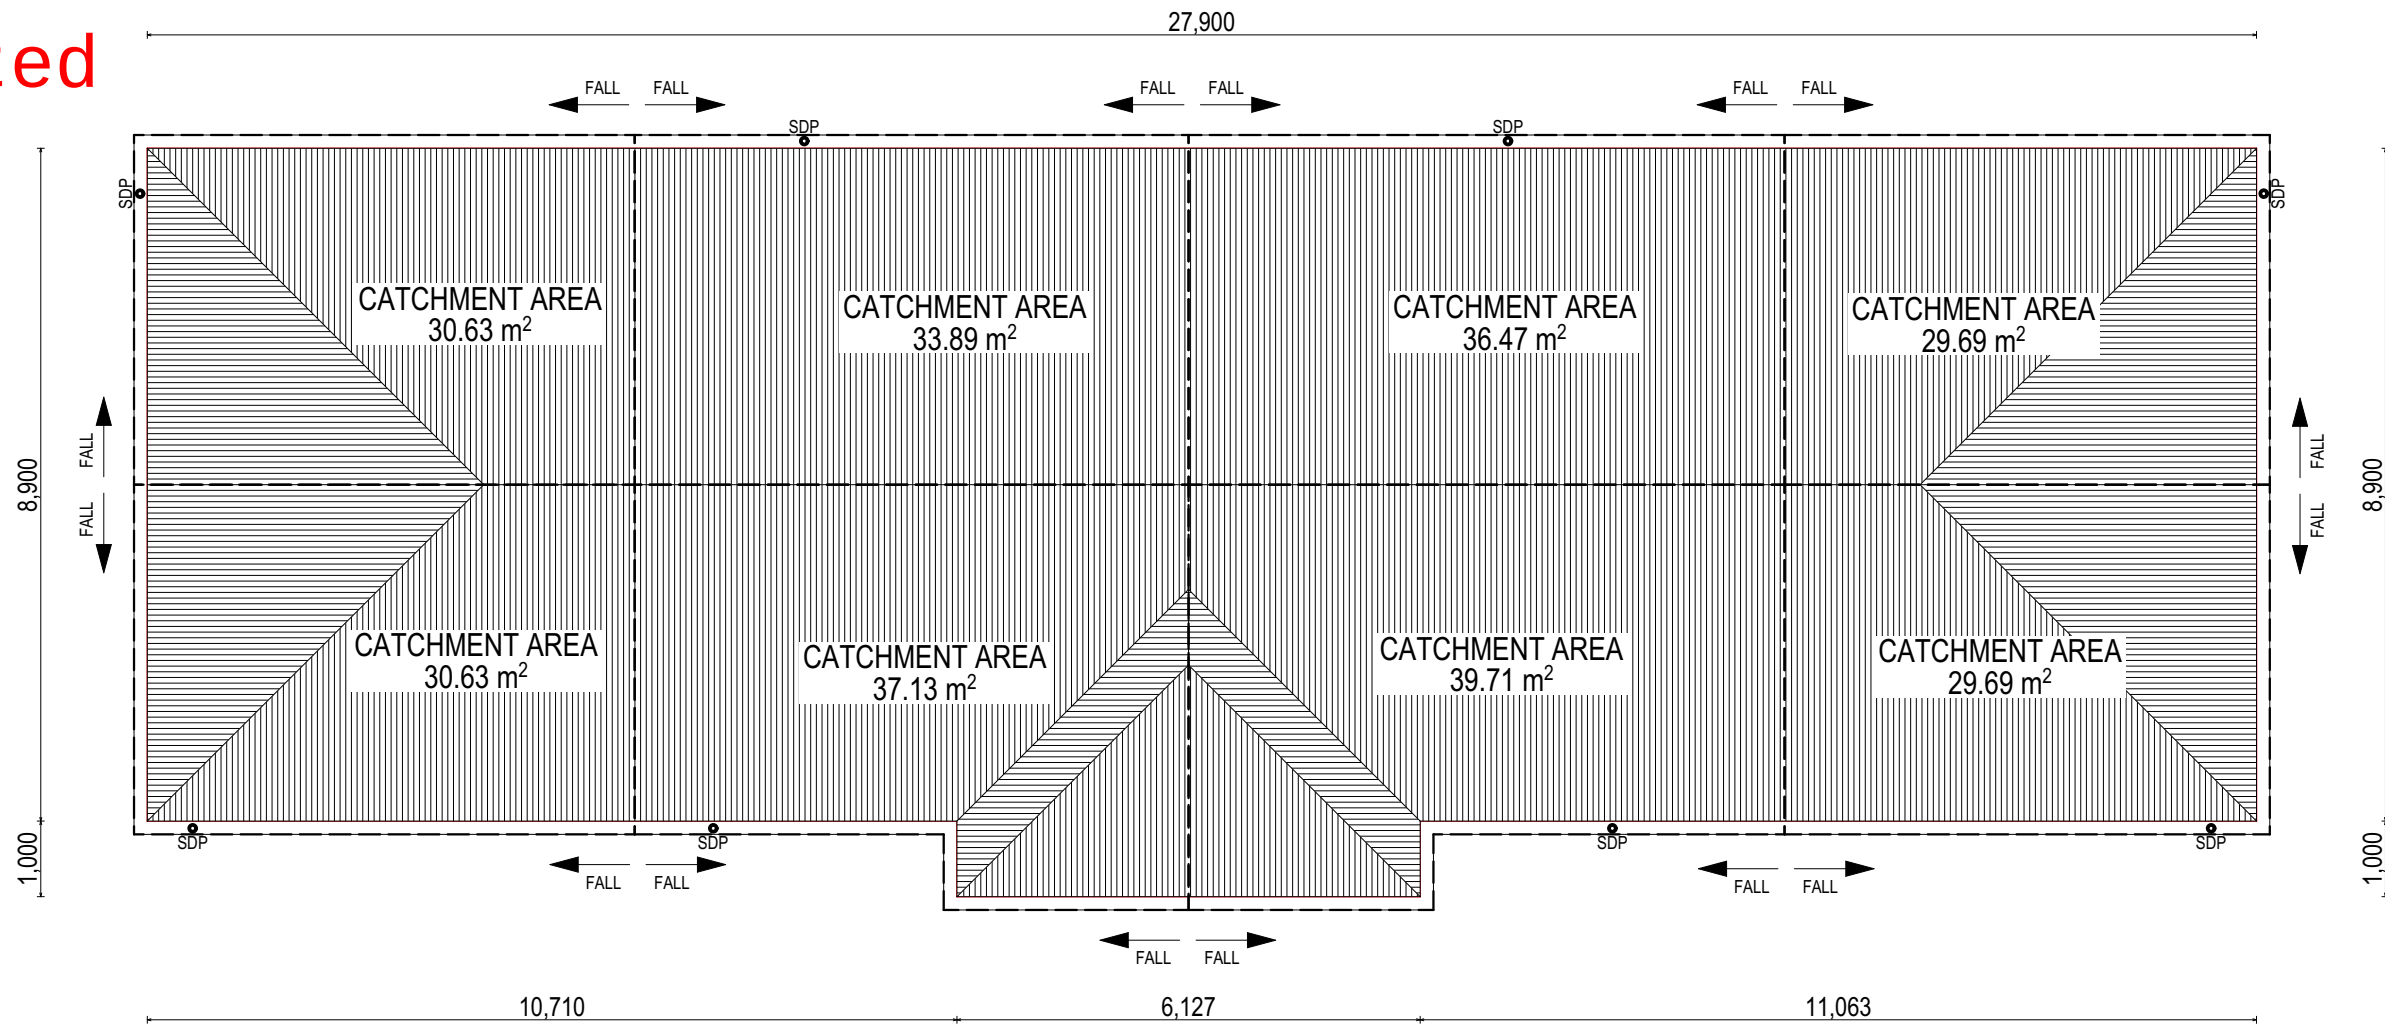

WHERE DOWNPIPES ARE FURTHER THAN 1.2m AWAY FROM VALLEY REFER TO N.C.C. 7.3.5(2)

POSITION AND QUALITY OF DOWNPIPES ARE NOT TO BE ALTERED WITHOUT CONSULTATION WITH DESIGNER.

AREA'S SHOWN ARE SURFACE AREAS/ CATCHMENT AREAS, NOT PLAN AREAS

Roofing Data		
	254.44	Flat Roof Area (excluding gutter and slope factor) (m²)
	276.41	Roof Surface Area (includes slope factor, excludes gutter) (m²)
Downpipe roof calculations (as per AS/NZA3500.3:2021)		
Ah	267.85	Area of roof catchment (including 115mm Slotted Quad Gutter) (m²)
Ac	324.1	Ah x Catchment Area Multiplier for slope (Table 3.4.3.2 from AS/NZS 3500.3:2021) (1.21 for 23° pitch) (m²)
Ae	6300	Cross sectional area of 57 x 115 Slotted Quad Gutter (mm²)
DRI	82	Design Rainfall Intensity (determined from Table E1 from AS/NZS 3500.3:2021)
Acdp	64	Catchment area per Downpipe (determined from Figure 3.5(A) from AS/NZS 3500.3:2021) (m²)
Required Downpipes	5.1	Ac / Acdp
Downpipes Provided	8	

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.


SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER
SIGNATURE: _____ DATE: _____
SIGNATURE: _____ DATE: _____
PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED
AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

	SPECIFICATION:		REVISION	DRAWN	CLIENT:	HOUSE DESIGN:		HOUSE CODE:	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.	
	DESIGNER	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC 28/03/2026	POOJA WIJERATNE & MENAKA DILSHAN		WOODBRIDGE 24			H-WDNWBG10SA
	COPYRIGHT:	8	PRELIM PLANS - INITIAL ISSUE	TNG 23/04/2026	ADDRESS:		FACADE DESIGN:			FACADE CODE:
	© 2026	9	PRELIM PLANS - AMENDMENTS	PL1 07.05.2026	50 LOGAN RD, EVANDALE TAS 7212		CLASSIC			F-WDNWBG10CLASA
		10	PRELIM PLANS- DRIVEWAY UPDATE	RT2 11/05/2026	LOT / SECTION / CT:	COUNCIL:	SHEET TITLE:	SHEET No.:		SCALES:
		11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV 21/05/2026	2 / - / 186056	NORTHERN MIDLANDS	ROOF DRAINAGE PLAN	12 / 26	1:100	714562

Template Version: 24_041

Exhibited

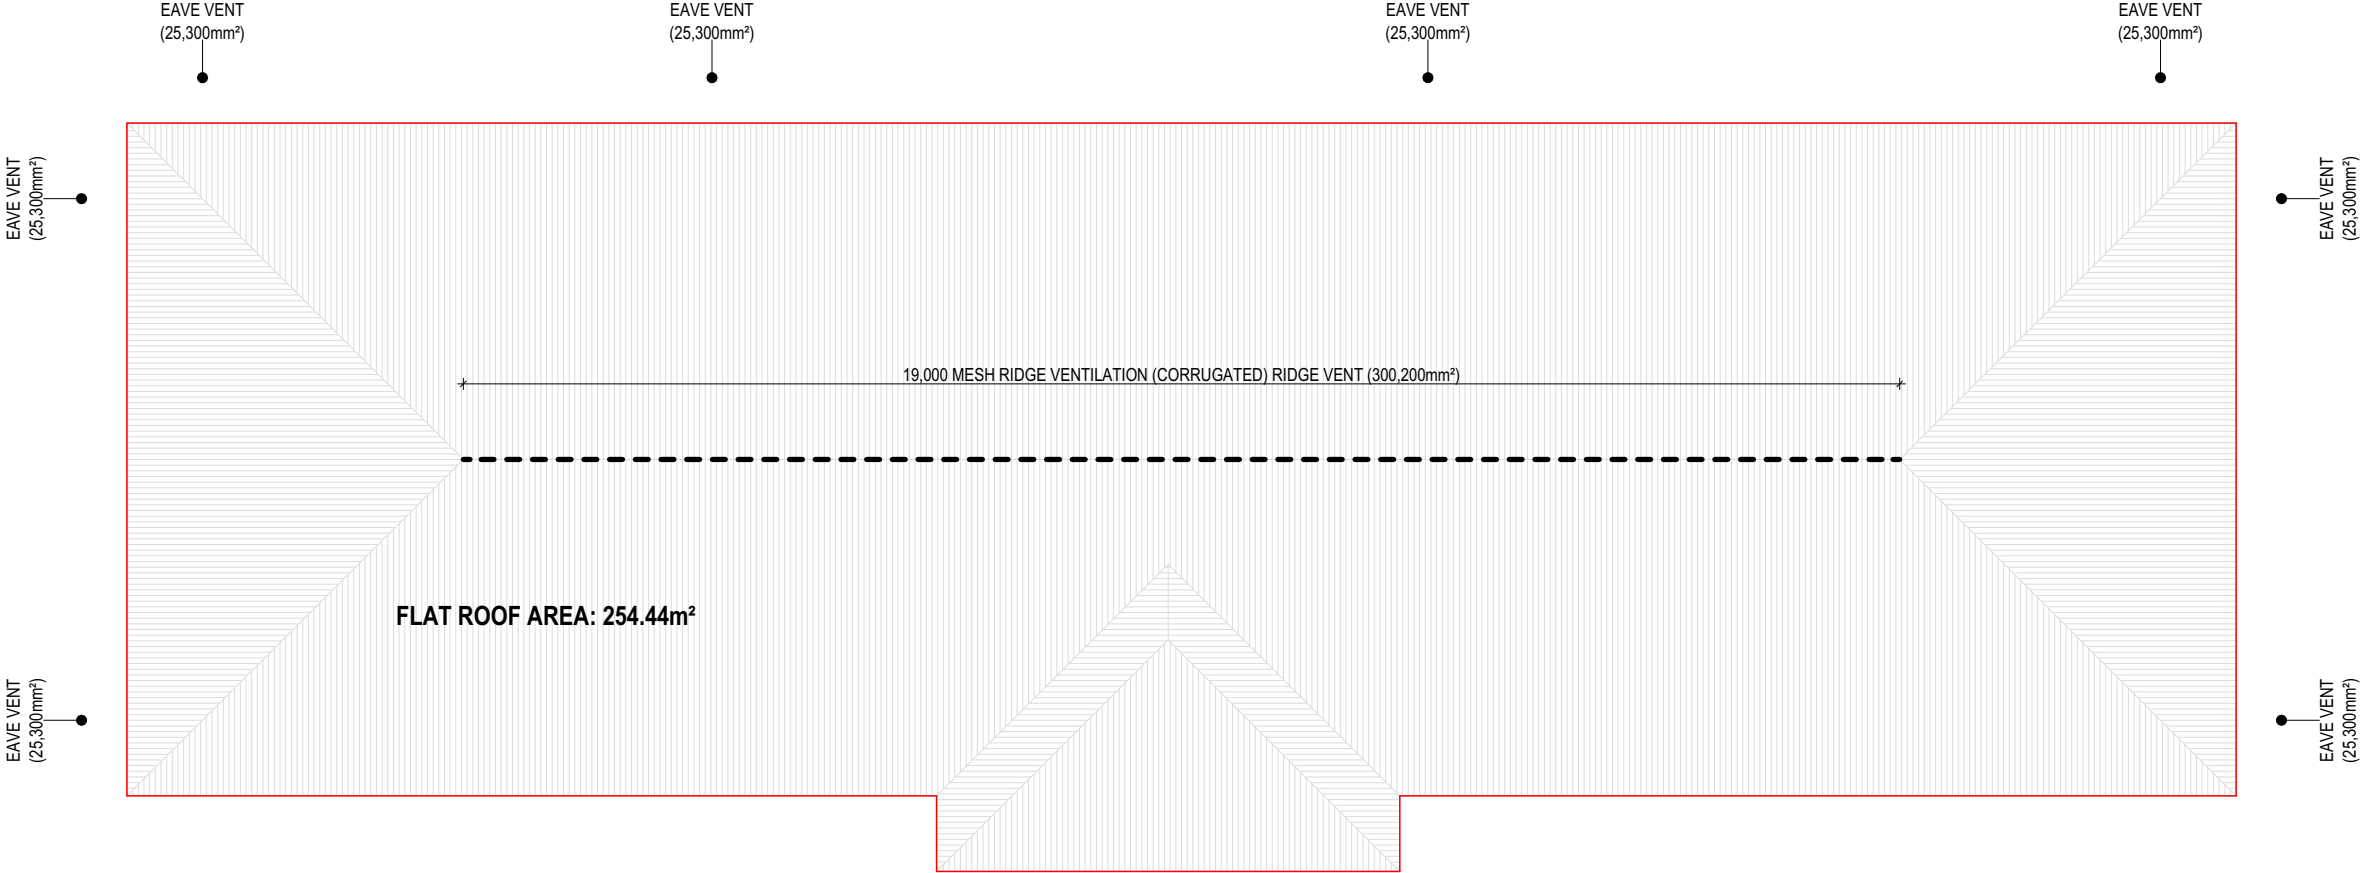

ROOF SPACE VENTILATION			
REFER TO ROOF PLAN FOR VENTILATION LOCATIONS			
GROUND FLOOR 23Â° ROOF			
LONGEST HORIZONTAL ROOF LENGTH		27.900m	
ROOF PITCH		23.00°	
HIGH LEVEL VENTILATION	REQUIRED	139,495mm² (5,000 x 27.900m)	
	PROVIDED	300,200mm²	
LOW LEVEL VENTILATION	REQUIRED	195,293mm² (7,000 x 27.900m)	
	PROVIDED	202,400mm²	
NO OF EAVE VENTS	REQUIRED	7.72	
	PROVIDED	8	

GROUND FLOOR 23° ROOF (ID 1)

ROOF LENGTH: 27.900m
ROOF PITCH: 23.0°
CEILING: FLAT
HIGH LEVEL VENTILATION REQUIRED: 139,495mm²
LOW LEVEL VENTILATION REQUIRED: 195,293mm²

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE:DATE:

SIGNATURE:DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED
AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

	SPECIFICATION:		REVISION	DRAWN	CLIENT:	HOUSE DESIGN:		HOUSE CODE:	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.	
	DESIGNER	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC 28/03/2026	POOJA WIJERATNE & MENAKA DILSHAN		WOODBIDGE 24			H-WDNWBG10SA
	COPYRIGHT:	8	PRELIM PLANS - INITIAL ISSUE	TNG 23/04/2026	ADDRESS:		FACADE DESIGN:			FACADE CODE:
	© 2026	9	PRELIM PLANS - AMENDMENTS	PL1 07.05.2026	50 LOGAN RD, EVANDALE TAS 7212		CLASSIC			F-WDNWBG10CLASA
		10	PRELIM PLANS- DRIVEWAY UPDATE	RT2 11/05/2026	LOT / SECTION / CT:	COUNCIL:	SHEET TITLE:	SHEET No.:		SCALES:
		11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV 21/05/2026	2 / - / 186056	NORTHERN MIDLANDS	ROOF VENTILATION PLAN	13 / 26	1:100	714562

Template Version: 24-041

REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:

- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION


FLOOR TILES SHOWN ON PLAN DO NOT INDICATE THE SIZE OR JOINT LOCATIONS OF THE ACTUAL FLOOR TILES.

TIMBER FLOORING SHOWN ON PLAN DOES NOT INDICATE THE BOARD SIZE OR DIRECTION OF THE ACTUAL FLOORING.

COVERINGS LEGEND

- NO COVERING
- COVER GRADE CONCRETE
- CARPET
- LAMINATE
- TILE (STANDARD WET AREAS)
- TILE (UPGRADED AREAS)
- DECKING

Exhibited

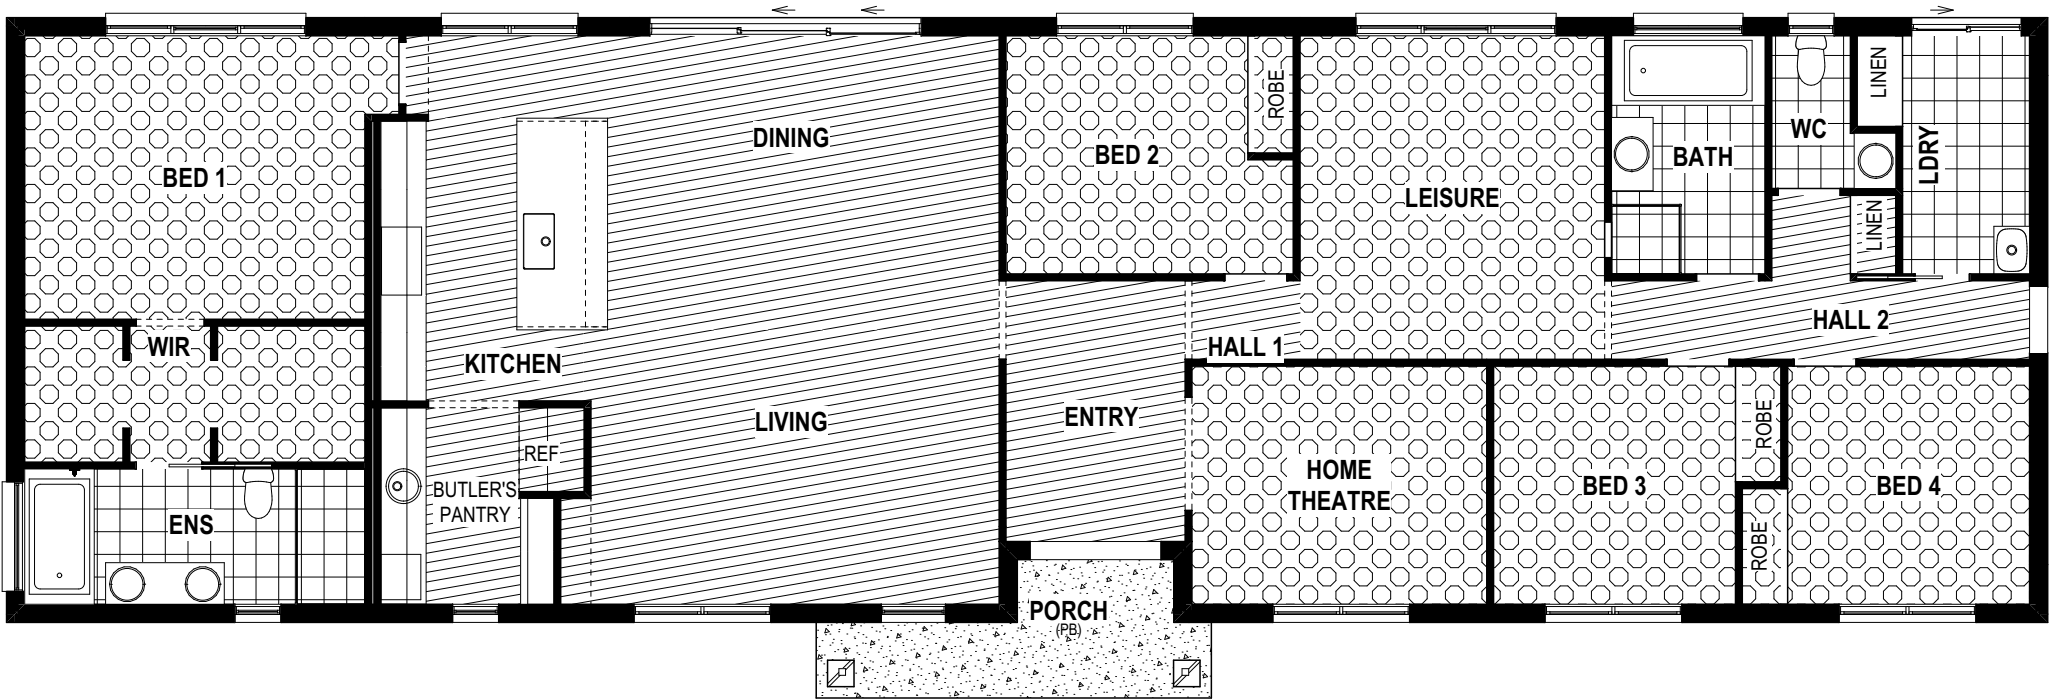

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:


SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED




SPECIFICATION: DESIGNER COPYRIGHT: © 2026		REVISION	DRAWN	CLIENT:	HOUSE DESIGN:	HOUSE CODE:	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE. 714562
	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC 28/03/2026	POOJA WIJERATNE & MENAKA DILSHAN	WOODBIDGE 24	H-WDNWBG10SA	
	8	PRELIM PLANS - INITIAL ISSUE	TNG 23/04/2026	ADDRESS:	FACADE DESIGN:	FACADE CODE:	
	9	PRELIM PLANS - AMENDMENTS	PL1 07.05.2026	50 LOGAN RD, EVANDALE TAS 7212	CLASSIC	F-WDNWBG10CLASA	
	10	PRELIM PLANS- DRIVEWAY UPDATE	RT2 11/05/2026	LOT / SECTION / CT:	SHEET TITLE:	SHEET No.:	
	11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV 21/05/2026	2 / - / 186056	COUNCIL: NORTHERN MIDLANDS	FLOOR COVERINGS	14 / 26
						SCALES:	1:100


BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

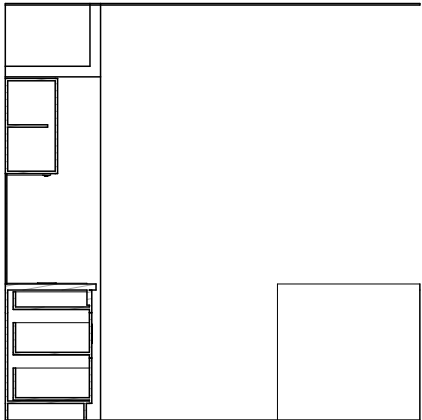

ELEVATION A
SCALE: 1:50

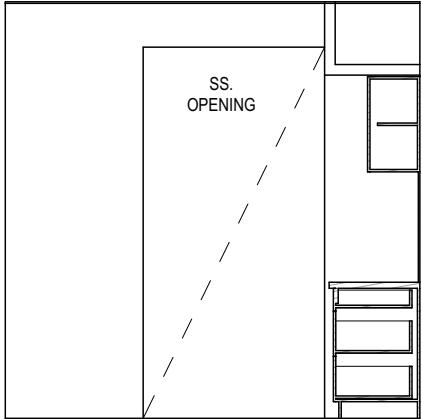

ELEVATION C
SCALE: 1:50

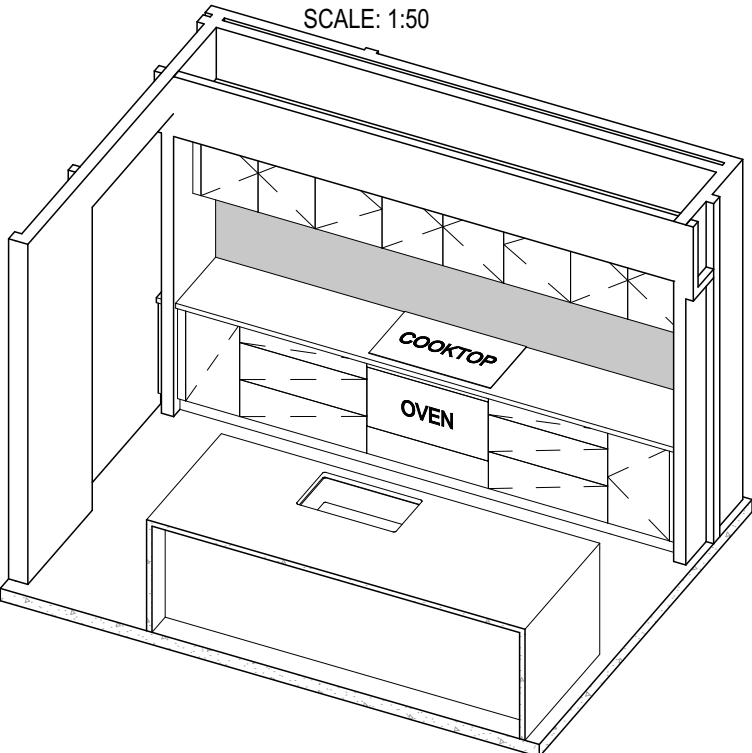


ALL DIMENSIONS ARE FRAME DIMENSIONS


© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.




SPECIFICATION: DESIGNER COPYRIGHT: © 2026	REVISION		DRAWN		CLIENT: POOJA WIJERATNE & MENAKA DILSHAN ADDRESS: 50 LOGAN RD, EVANDALE TAS 7212 LOT / SECTION / CT: 2 / - / 186056 COUNCIL: NORTHERN MIDLANDS	HOUSE DESIGN: WOODBIDGE 24 FACADE DESIGN: CLASSIC SHEET TITLE: KITCHEN DETAILS	HOUSE CODE: H-WDNWBG10SA FACADE CODE: F-WDNWBG10CLASA SHEET No.: 15 / 26 SCALES: 1:50	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE. 714562
	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC	28/03/2026				
	8	PRELIM PLANS - INITIAL ISSUE	TNG	23/04/2026				
	9	PRELIM PLANS - AMENDMENTS	PL1	07.05.2026				
	10	PRELIM PLANS- DRIVEWAY UPDATE	RT2	11/05/2026				
	11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV	21/05/2026				

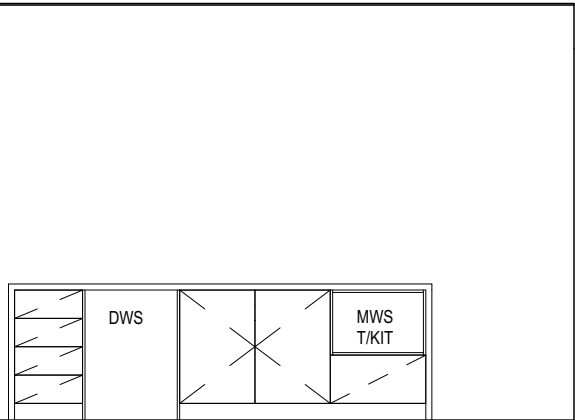

ELEVATION B
SCALE: 1:50

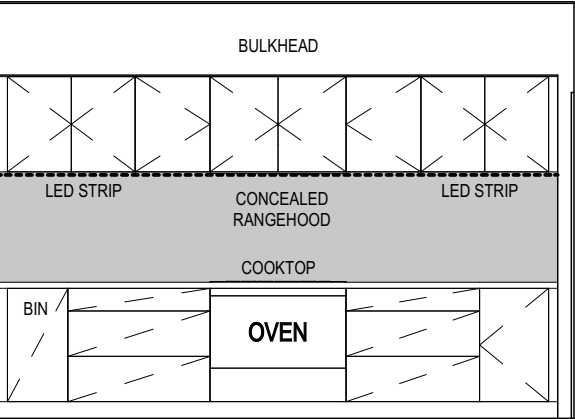

ELEVATION D
SCALE: 1:50

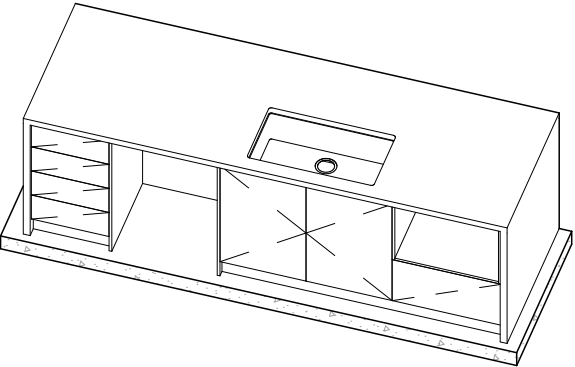


Exhibited

REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:
- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION

DETAILS DEPICTED ON THIS SHEET ARE A REPRESENTATION ONLY. JOINER MAY ADJUST CABINETRY AS REQUIRED.

GAS CONNECTION FOR COOKTOP TO BE LOCATED 700mm TO RIGHT HAND SIDE OF CENTRE OF COOKTOP

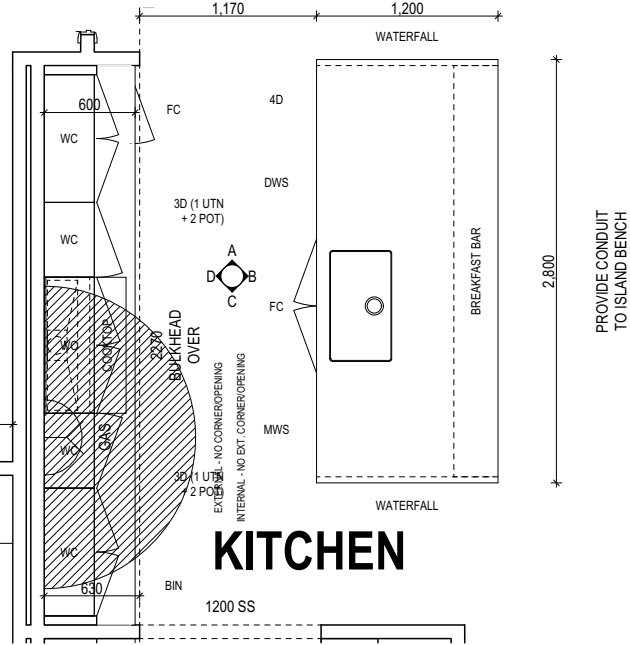

KITCHEN PLAN
SCALE: 1:50


SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER


SIGNATURE: DATE:

SIGNATURE: DATE:


PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

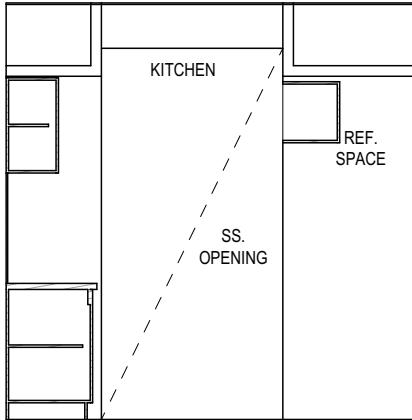


ELEVATION A
SCALE: 1:50

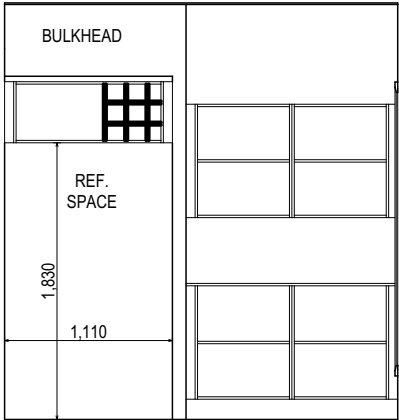


ELEVATION B
SCALE: 1:50

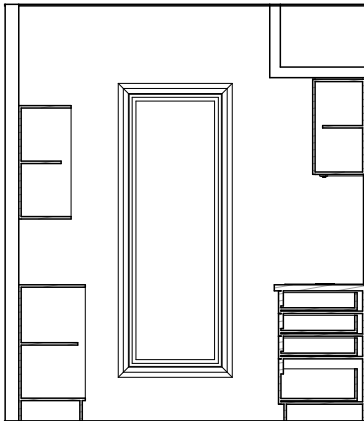

ELEVATION C
SCALE: 1:50

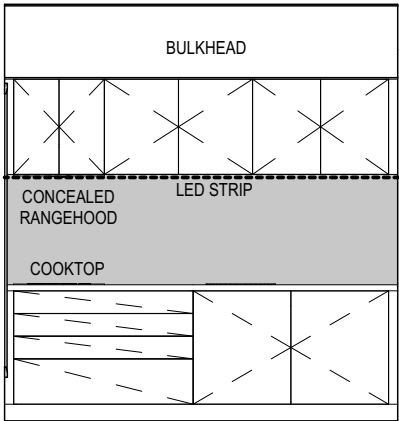

ELEVATION D
SCALE: 1:50

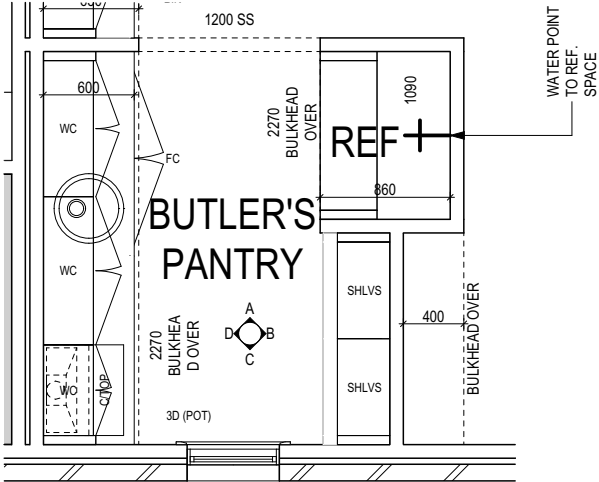

BUTLER'S PANTRY PLAN
SCALE: 1:50

**SUBJECT TO NCC 2022
(1 MAY 2023)**
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

ALL DIMENSIONS ARE FRAME DIMENSIONS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.



SPECIFICATION:		REVISION	DRAWN	CLIENT:	HOUSE DESIGN:	HOUSE CODE:	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
DESIGNER	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC 28/03/2026	POOJA WIJERATNE & MENAKA DILSHAN	WOODBIDGE 24	H-WDNWBG10SA	
COPYRIGHT:	8	PRELIM PLANS - INITIAL ISSUE	TNG 23/04/2026	ADDRESS:	FACADE DESIGN:	FACADE CODE:	
© 2026	9	PRELIM PLANS - AMENDMENTS	PL1 07.05.2026	50 LOGAN RD, EVANDALE TAS 7212	CLASSIC	F-WDNWBG10CLASA	
	10	PRELIM PLANS- DRIVEWAY UPDATE	RT2 11/05/2026	LOT / SECTION / CT:	SHEET TITLE:	SHEET No.:	
	11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV 21/05/2026	2 / - / 186056	BUTLER'S PANTRY DETAILS	16 / 26	SCALES: 1:50
				COUNCIL:			714562
				NORTHERN MIDLANDS			


REFER TO THE FOLLOWING DETAILS:
VANITY DETAILS G-VANI-001
WINDOW OVER BATH HOB D-WIND-ALU001
STANDARD BATH HOB D-WETA-BATH003
WET AREA TILING LAYOUTS D-WETA-TILE002
SQUARE SET WINDOWS G-WIND-SSET02
FULL HEIGHT TILING D-LINI-WETA

REFER TO SHEET 1 (COVER SHEET) FOR
ALL BUILDING INFORMATION REGARDING:
- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION


DETAILS DEPICTED ON THIS SHEET ARE A
REPRESENTATION ONLY

LEGEND


- RSHR RAIL SHOWER
ROSE SHOWER ROSE
ELBW SHOWER ELBOW
CONNECTION
MIX MIXER TAP
HT HOT TAP
CT COLD TAP
HS HOB SPOUT
WS WALL SPOUT
SC STOP COCK
TRH TOILET ROLL HOLDER
TR-S TOWEL RAIL - SINGLE
TR-D TOWEL RAIL - DOUBLE
TL TOWEL LADDER
TH TOWEL HOLDER
TR TOWEL RACK
TMB TUMBLER HOLDER
RNG TOWEL RING
RH ROBE HOOK
SHLF SHELF
SR SHAMPOO RECESS
SOAP SOAP HOLDER

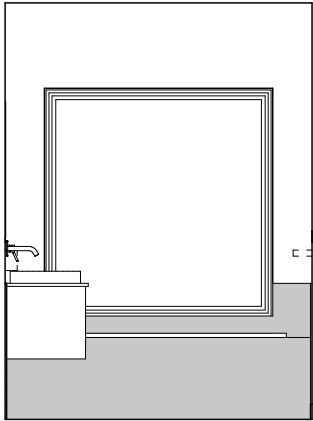


ELEVATION A
SCALE: 1:50

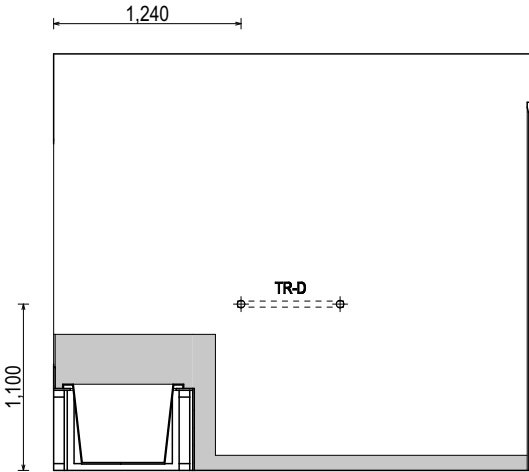


ELEVATION B
SCALE: 1:50

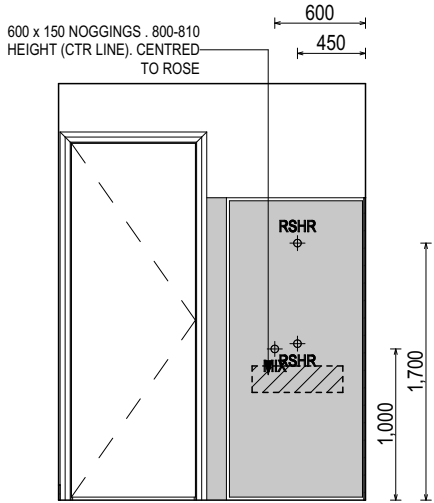

ELEVATION C
SCALE: 1:50

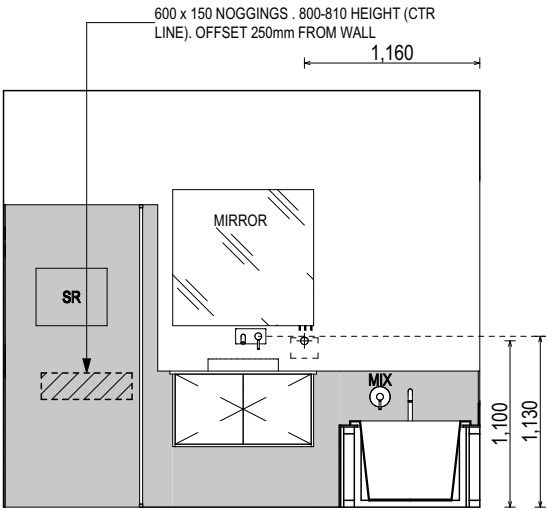

ELEVATION D
SCALE: 1:50

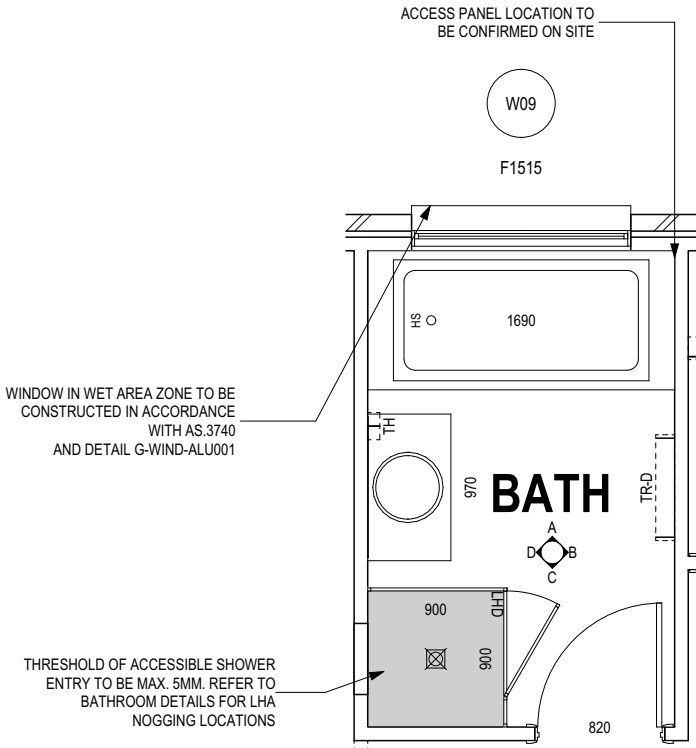

BATHROOM PLAN
SCALE: 1:50

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED
AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

ALL DIMENSIONS ARE FRAME DIMENSIONS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.



SPECIFICATION:	DESIGNER	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC	28/03/2026	CLIENT:	POOJA WIJERATNE & MENAKA DILSHAN	HOUSE DESIGN:	WOODBIDGE 24	HOUSE CODE:	H-WDNWBG10SA	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
COPYRIGHT:	© 2026	8	PRELIM PLANS - INITIAL ISSUE	TNG	23/04/2026	ADDRESS:	50 LOGAN RD, EVANDALE TAS 7212	FACADE DESIGN:	CLASSIC	FACADE CODE:	F-WDNWBG10CLASA	
		9	PRELIM PLANS - AMENDMENTS	PL1	07.05.2026	LOT / SECTION / CT:	2 / - / 186056	SHEET TITLE:	BATHROOM DETAILS	SHEET No.:	17 / 26	714562
		10	PRELIM PLANS- DRIVEWAY UPDATE	RT2	11/05/2026	COUNCIL:	NORTHERN MIDLANDS			SCALES:	1:50	
		11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV	21/05/2026							

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

Exhibited


REFER TO THE FOLLOWING DETAILS:
VANITY DETAILS G-VANI-001
WINDOW OVER BATH HOB D-WIND-ALU001
STANDARD BATH HOB D-WETA-BATH003
WET AREA TILING LAYOUTS D-WETA-TILE002
SQUARE SET WINDOWS G-WIND-SSET02
FULL HEIGHT TILING D-LINI-WETA

REFER TO SHEET 1 (COVER SHEET) FOR
ALL BUILDING INFORMATION REGARDING:
- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION


DETAILS DEPICTED ON THIS SHEET ARE A
REPRESENTATION ONLY

LEGEND


- RSHR RAIL SHOWER
ROSE SHOWER ROSE
ELBW SHOWER ELBOW
CONNECTION
MIX MIXER TAP
HT HOT TAP
CT COLD TAP
HS HOB SPOUT
WS WALL SPOUT
SC STOP COCK
TRH TOILET ROLL HOLDER
TR-S TOWEL RAIL - SINGLE
TR-D TOWEL RAIL - DOUBLE
TL TOWEL LADDER
TH TOWEL HOLDER
TR TOWEL RACK
TMB TUMBLER HOLDER
RNG TOWEL RING
RH ROBE HOOK
SHLF SHELF
SR SHAMPOO RECESS
SOAP SOAP HOLDER

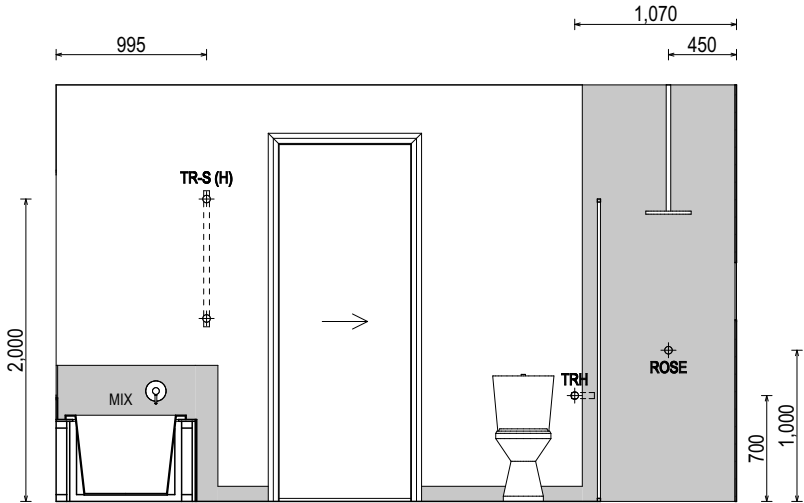


ELEVATION A
SCALE: 1:50

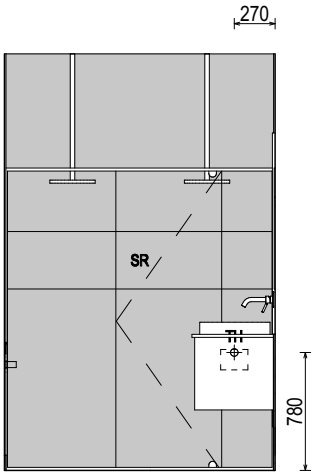


ELEVATION B
SCALE: 1:50

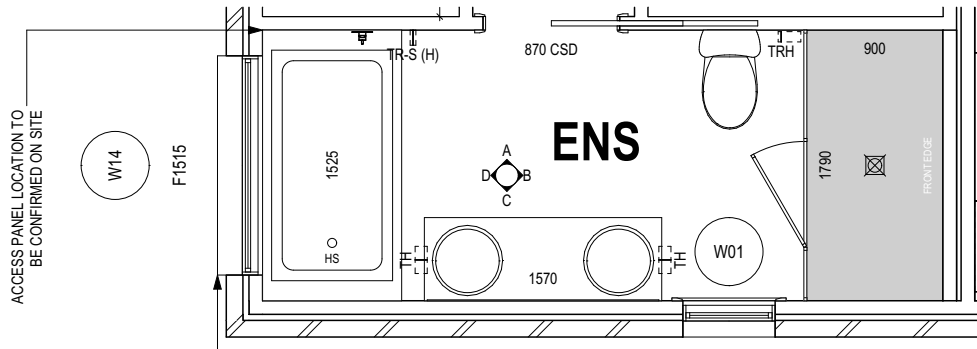

ENSUITE PLAN
SCALE: 1:50

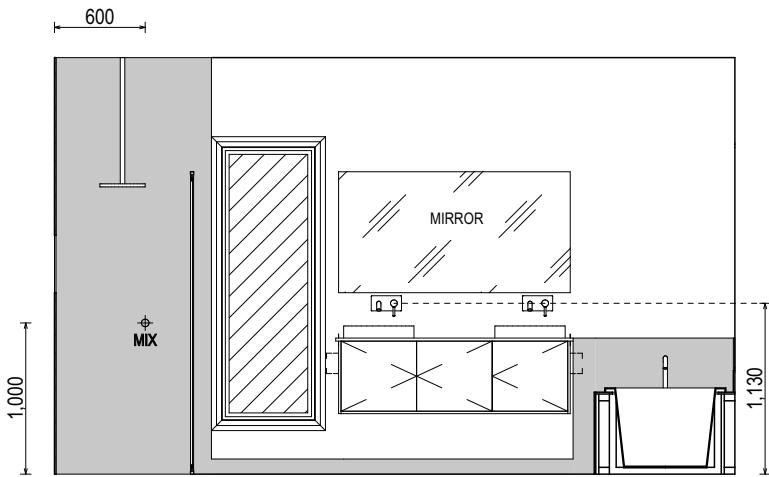

ELEVATION C
SCALE: 1:50

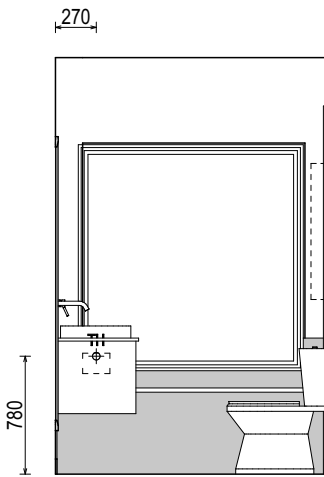

ELEVATION D
SCALE: 1:50

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED
AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

ALL DIMENSIONS ARE FRAME DIMENSIONS


© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.




SPECIFICATION:	DESIGNER	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC	28/03/2026	CLIENT:	POOJA WIJERATNE & MENAKA DILSHAN	HOUSE DESIGN:	WOODBIDGE 24	HOUSE CODE:	H-WDNWBG10SA	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
COPYRIGHT:	© 2026	8	PRELIM PLANS - INITIAL ISSUE	TNG	23/04/2026	ADDRESS:	50 LOGAN RD, EVANDALE TAS 7212	FACADE DESIGN:	CLASSIC	FACADE CODE:	F-WDNWBG10CLASA	
		9	PRELIM PLANS - AMENDMENTS	PL1	07.05.2026	LOT / SECTION / CT:	2 / - / 186056	SHEET TITLE:	ENSUITE DETAILS	SHEET No.:	18 / 26	
		10	PRELIM PLANS - DRIVEWAY UPDATE	RT2	11/05/2026	COUNCIL:	NORTHERN MIDLANDS			SCALES:	1:50	714562
		11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV	21/05/2026							

LEGEND


- RSHR RAIL SHOWER
ROSE SHOWER ROSE
ELBW SHOWER ELBOW CONNECTION
MIX MIXER TAP
HT HOT TAP
CT COLD TAP
HS HOB SPOUT
WS WALL SPOUT
SC STOP COCK
TRH TOILET ROLL HOLDER
TR-S TOWEL RAIL - SINGLE
TR-D TOWEL RAIL - DOUBLE
TL TOWEL LADDER
TH TOWEL HOLDER
TR TOWEL RACK
TMB TUMBLER HOLDER
RNG TOWEL RING
RH ROBE HOOK
SHLF SHELF
SR SHAMPOO RECESS
SOAP SOAP HOLDER




ELEVATION A
SCALE: 1:50

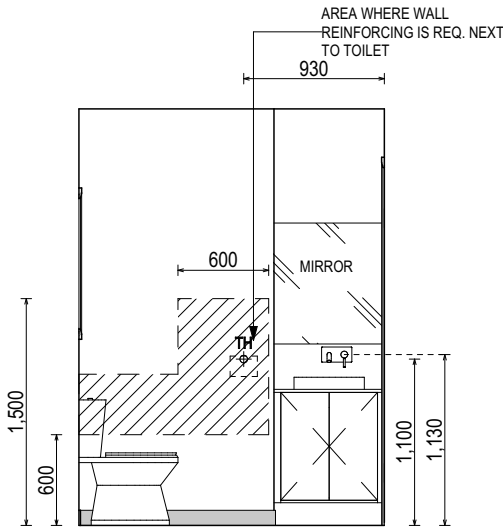


ELEVATION B
SCALE: 1:50



ELEVATION C
SCALE: 1:50

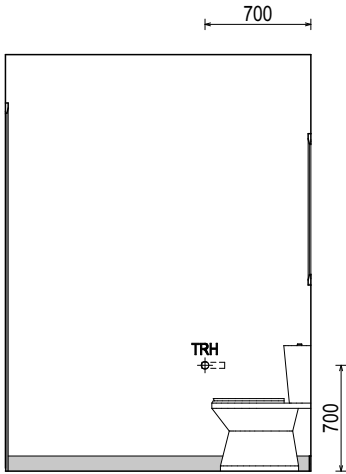

ELEVATION D
SCALE: 1:50



WC PLAN
SCALE: 1:50

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED


ALL DIMENSIONS ARE FRAME DIMENSIONS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.




SPECIFICATION:	DESIGNER	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC	28/03/2026	CLIENT:	POOJA WIJERATNE & MENAKA DILSHAN	HOUSE DESIGN:	WOODBIDGE 24	HOUSE CODE:	H-WDNWBG10SA	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
COPYRIGHT:	© 2026	8	PRELIM PLANS - INITIAL ISSUE	TNG	23/04/2026	ADDRESS:	50 LOGAN RD, EVANDALE TAS 7212	FACADE DESIGN:	CLASSIC	FACADE CODE:	F-WDNWBG10CLASA	
		9	PRELIM PLANS - AMENDMENTS	PL1	07.05.2026	LOT / SECTION / CT:	2 / - / 186056	SHEET TITLE:	WC DETAILS	SHEET No.:	19 / 26	
		10	PRELIM PLANS - DRIVEWAY UPDATE	RT2	11/05/2026	COUNCIL:	NORTHERN MIDLANDS			SCALES:	1:50	
		11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV	21/05/2026							


714562




ELEVATION A
SCALE: 1:50

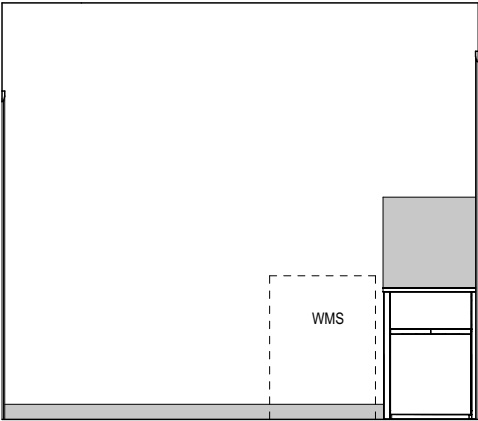


ELEVATION B
SCALE: 1:50



ELEVATION C
SCALE: 1:50

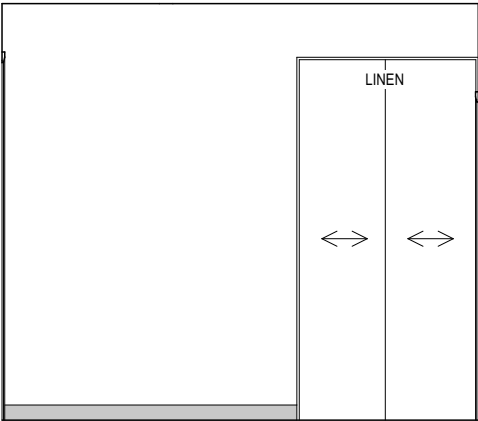

ELEVATION D
SCALE: 1:50

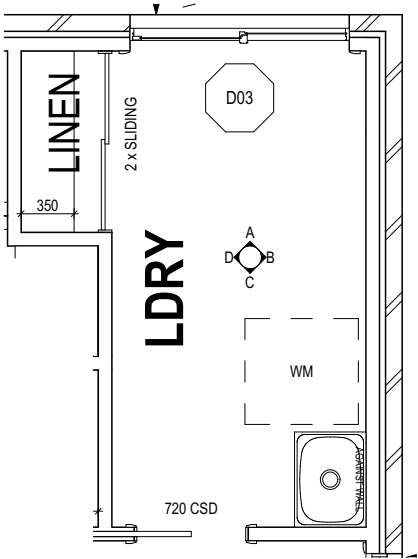

LAUNDRY PLAN
SCALE: 1:50

**SUBJECT TO NCC 2022
(1 MAY 2023)**
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED
AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED


ALL DIMENSIONS ARE FRAME DIMENSIONS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.




SPECIFICATION:		REVISION	DRAWN	CLIENT:	HOUSE DESIGN:	HOUSE CODE:	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
DESIGNER	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC 28/03/2026	POOJA WIJERATNE & MENAKA DILSHAN	WOODBIDGE 24	H-WDNWBG10SA	
COPYRIGHT:	8	PRELIM PLANS - INITIAL ISSUE	TNG 23/04/2026	ADDRESS:	FACADE DESIGN:	FACADE CODE:	
© 2026	9	PRELIM PLANS - AMENDMENTS	PL1 07.05.2026	50 LOGAN RD, EVANDALE TAS 7212	CLASSIC	F-WDNWBG10CLASA	
	10	PRELIM PLANS- DRIVEWAY UPDATE	RT2 11/05/2026	LOT / SECTION / CT:	SHEET TITLE:	SHEET No.:	
	11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV 21/05/2026	2 / - / 186056	LAUNDRY DETAILS	20 / 26	
				COUNCIL:		SCALES:	
				NORTHERN MIDLANDS		1:50	714562


Exhibited

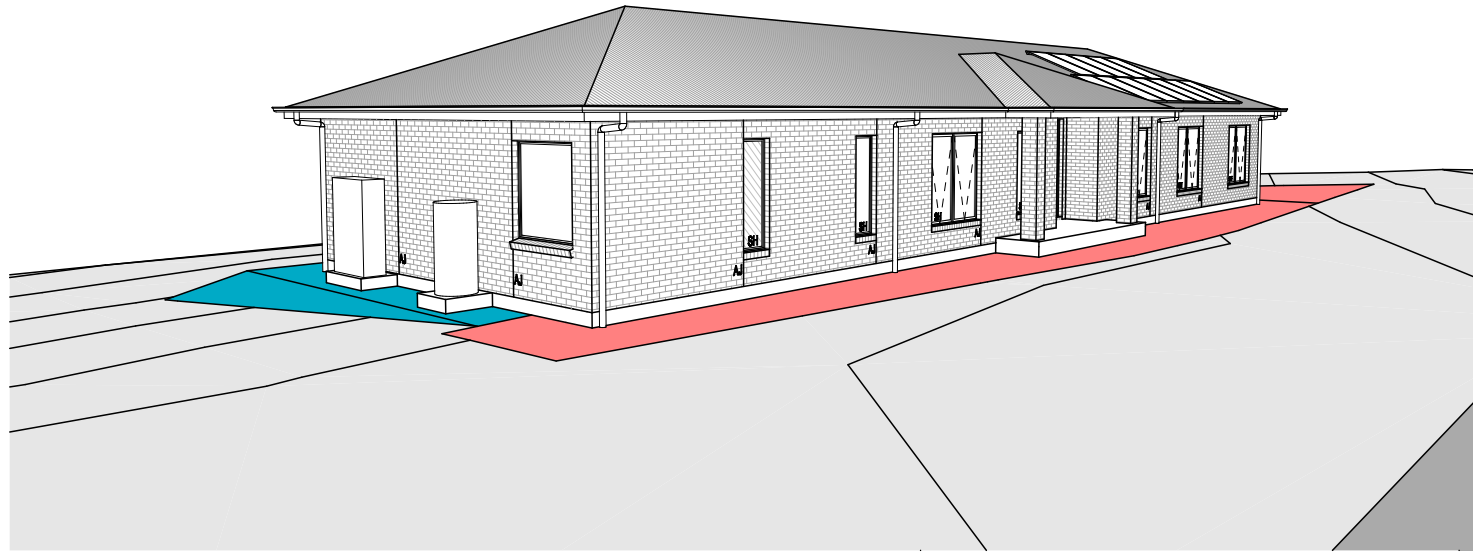


FRONT LEFT

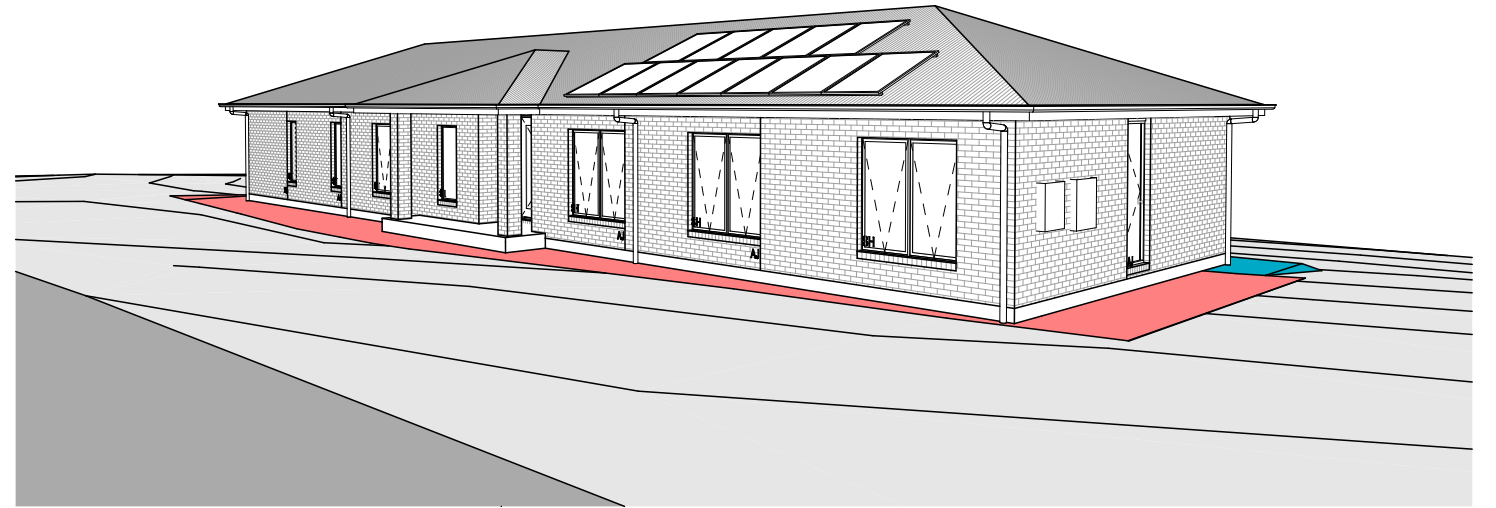

FRONT RIGHT

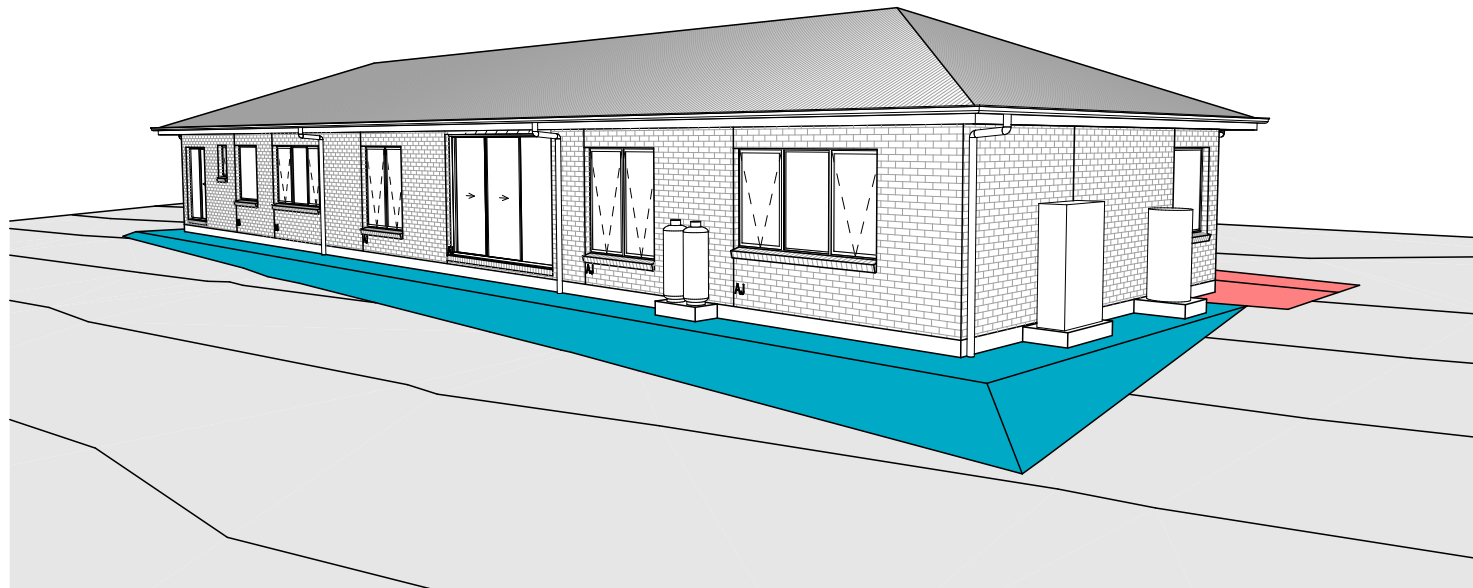

REAR LEFT

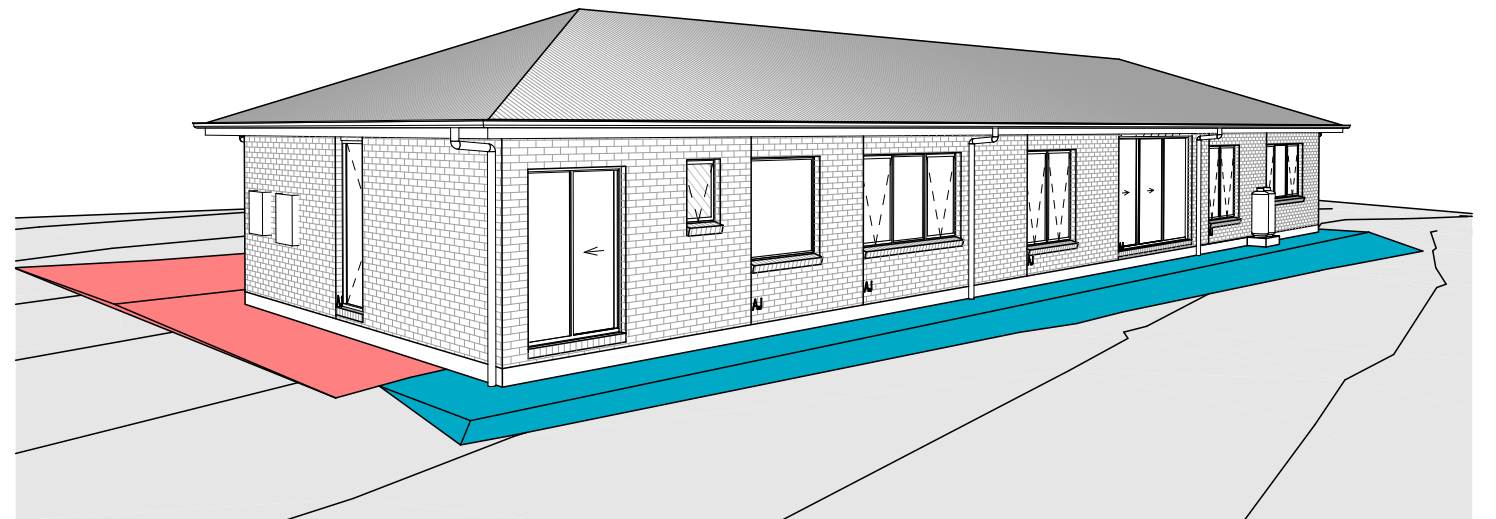

REAR RIGHT

**SUBJECT TO NCC 2022
(1 MAY 2023)**
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE: _____ DATE: _____

SIGNATURE: _____ DATE: _____

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED
AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

**NOTE: SITE LEVELS AND SETBACKS SHOWN ARE INDICATIVE ONLY AND SUBJECT TO A FINAL CONTOUR SURVEY AND
REGISTERED REPORTS BEING COMPLETED. 3D IMAGES ARE FOR ILLUSTRATIVE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.**

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT
IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.



SPECIFICATION: DESIGNER COPYRIGHT: © 2026		REVISION	DRAWN	CLIENT:	HOUSE DESIGN:	HOUSE CODE:	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE. 714562
	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC 28/03/2026	POOJA WIJERATNE & MENAKA DILSHAN	WOODBIDGE 24	H-WDNWBG10SA	
	8	PRELIM PLANS - INITIAL ISSUE	TNG 23/04/2026	ADDRESS:	FACADE DESIGN:	FACADE CODE:	
	9	PRELIM PLANS - AMENDMENTS	PL1 07.05.2026	50 LOGAN RD, EVANDALE TAS 7212	CLASSIC	F-WDNWBG10CLASA	
	10	PRELIM PLANS- DRIVEWAY UPDATE	RT2 11/05/2026	LOT / SECTION / CT:	SHEET TITLE:	SCALES:	
	11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV 21/05/2026	2 / - / 186056	3D VIEWS	SHEET No.: 21 / 26	
				COUNCIL: NORTHERN MIDLANDS			

WET AREA NOTES

VESSELS OR AREA WHERE THE FIXTURE IS INSTALLED	FLOORS AND HORIZONTAL SURFACES	WALLS	WALL JUNCTIONS AND JOINTS	PENETRATIONS
ENCLOSED SHOWER WITH HOB	WATERPROOF ENTIRE ENCLOSED SHOWER AREA INCLUDING HOB.	WATERPROOF TO NOT LESS THAN 150mm ABOVE THE SHOWER FLOOR SUBSTRATE OR NOT LESS THAN 25mm ABOVE THE MAXIMUM RETAINED WATER LEVEL WHICH EVER IS THE GREATER WITH THE REMAINDER BEING WATERPROOF TO A HEIGHT OF NOT LESS THAN 1800mm ABOVE THE FINISHED FLOOR LEVEL.	WATERPROOF INTERNAL AND EXTERNAL CORNERS AND HORIZONTAL JOINTS WITHIN A HEIGHT OF 1800mm ABOVE THE FLOOR LEVEL WITH NOT LESS THAN 40mm WIDTH EITHER SIDE OF THE JUNCTION.	WATERPROOF ALL PENETRATIONS.
ENCLOSED SHOWER WITHOUT HOB	WATERPROOF ENTIRE ENCLOSED SHOWER AREA, INCLUDING WATERSTOP.	WATERPROOF TO NOT LESS THAN 150mm ABOVE THE SHOWER FLOOR SUBSTRATE WITH THE REMAINDER BEING WATERPROOF TO A HEIGHT OF NOT LESS THAN 1800mm ABOVE THE FINISHED FLOOR LEVEL.	WATERPROOF INTERNAL AND EXTERNAL CORNERS AND HORIZONTAL JOINTS WITHIN A HEIGHT OF 1800mm ABOVE THE FLOOR LEVEL WITH NOT LESS THAN 40mm WIDTH EITHER SIDE OF THE JUNCTION.	WATERPROOF ALL PENETRATIONS.
ENCLOSED SHOWER WITH STEPDOWN	WATERPROOF ENTIRE ENCLOSED SHOWER AREA INCLUDING THE STEPDOWN.	WATERPROOF TO NOT LESS THAN 150mm ABOVE THE SHOWER FLOOR SUBSTRATE OR NOT LESS THAN 25mm ABOVE THE MAXIMUM RETAINED WATER LEVEL WHICHEVER IS THE GREATER WITH THE REMAINDER BEING WATERPROOF TO A HEIGHT OF NOT LESS THAN 1800mm ABOVE THE FINISHED FLOOR LEVEL.	WATERPROOF INTERNAL AND EXTERNAL CORNERS AND HORIZONTAL JOINTS WITHIN A HEIGHT OF 1800mm ABOVE THE FLOOR LEVEL WITH NOT LESS THAN 40mm WIDTH EITHER SIDE OF THE JUNCTION.	WATERPROOF ALL PENETRATIONS.
ENCLOSED SHOWER WITH PRE-FORMED SHOWER BASE	N/A	WATERPROOF TO A HEIGHT OF NOT LESS THAN 1800mm ABOVE FINISHED FLOOR LEVEL.	WATERPROOF INTERNAL AND EXTERNAL CORNERS AND HORIZONTAL JOINTS WITHIN A HEIGHT OF 1800mm ABOVE THE FLOOR LEVEL WITH NOT LESS THAN 40mm WIDTH EITHER SIDE OF THE JUNCTION.	WATERPROOF ALL PENETRATIONS.
UNENCLOSED SHOWERS	WATERPROOF ENTIRE UNCLOSED SHOWER AREA.	WATERPROOF TO NOT LESS THAN 150mm ABOVE THE SHOWER FLOOR SUBSTRATE OR NOT LESS THAN 25mm ABOVE THE MAXIMUM RETAINED WATER LEVEL WHICH EVER IS THE GREATER WITH THE REMAINDER BEING WATERPROOF TO A HEIGHT OF NOT LESS THAN 1800mm ABOVE THE FINISHED FLOOR LEVEL.	WATERPROOF INTERNAL AND EXTERNAL CORNERS AND HORIZONTAL JOINTS WITHIN A HEIGHT OF 1800mm ABOVE THE FLOOR LEVEL WITH NOT LESS THAN 40mm WIDTH EITHER SIDE OF THE JUNCTION.	WATERPROOF ALL PENETRATIONS.
AREAS OUTSIDE THE SHOWER AREA FOR CONCRETE AND COMPRESSED FIBRE CEMENT SHEET FLOORING	WATER RESISTANT TO ENTIRE FLOOR.	N/A	WATERPROOF ALL WALL/FLOOR JUNCTIONS. WHERE A FLASHING IS USED THE HORIZONTAL LEG MUST BE NOT LESS THAN 40mm.	N/A
AREAS OUTSIDE THE SHOWER AREA FOR TIMBER FLOORS INCLUDING PARTICLEBOARD, PLYWOOD AND OTHER TIMBER BASED FLOORING MATERIALS	WATERPROOF ENTIRE FLOOR.	N/A	WATERPROOF ALL WALL/FLOOR JUNCTIONS. WHERE A FLASHING IS USED THE HORIZONTAL LEG MUST BE NOT LESS THAN 40mm.	N/A
AREAS ADJACENT TO BATHS AND SPAS FOR CONCRETE AND COMPRESSED FIBRE CEMENT SHEET FLOORING.	WATER RESISTANT TO ENTIRE FLOOR.	WATERPROOF TO A HEIGHT OF NOT LESS THAN 150mm ABOVE THE VESSEL AND EXPOSED SURFACES BELOW THE VESSEL LIP TO FLOOR LEVEL.	WATERPROOF EDGES OF THE VESSEL AND JUNCTION OF BATH ENCLOSURE WITH FLOOR. WHERE THE LIP OF THE BATH IS SUPPORTED BY A HORIZONTAL SURFACE, THIS MUST BE WATERPROOF FOR SHOWERS OVER BATH AND WATER RESISTANT FOR ALL OTHER CASES.	WATERPROOF ALL TAP AND SPOUT PENETRATIONS WHERE THEY OCCUR IN A HORIZONTAL SURFACE.
AREAS ADJACENT TO BATHS AND SPAS (SEE NOTE 1) FOR TIMBER FLOORS INCLUDING PARTICLEBOARD, PLYWOOD AND OTHER TIMBER BASED FLOORING MATERIALS.	WATERPROOF ENTIRE FLOOR.	WATERPROOF TO A HEIGHT OF NOT LESS THAN 150mm ABOVE THE VESSEL AND EXPOSED SURFACES BELOW THE VESSEL LIP TO FLOOR LEVEL.	WATERPROOF EDGES OF THE VESSEL AND JUNCTION OF BATH ENCLOSURE WITH FLOOR. WHERE THE LIP OF THE BATH IS SUPPORTED BY A HORIZONTAL SURFACE, THIS MUST BE WATERPROOF FOR SHOWERS OVER BATH AND WATER RESISTANT FOR ALL OTHER CASES.	WATERPROOF ALL TAP AND SPOUT PENETRATIONS WHERE THEY OCCUR IN A HORIZONTAL SURFACE.
INSERTED BATHS	N/A FOR FLOOR UNDER BATH. ANY SHELF AREA ADJOINING THE BATH OR SPA MUST BE WATERPROOF AND INCLUDE A WATERSTOP UNDER THE VESSEL LIP.	N/A FOR WALL UNDER BATH. WATERPROOF TO NOT LESS THAN 150mm ABOVE THE LIP OF THE BATH.	N/A FOR WALL UNDER BATH. WATERPRROF TO NOT LESS THAN 150 mm ABOVE THE LIP OF A BATH OR SPA.	WATERPROOF ALL TAP AND SPOUT PENETRATIONS WHERE THEY OCCUR IN A HORIZONTAL SURFACE.
WALLS ADJOINING OTHER VESSELS (EG. SINKS, LAUNDRY TUBS AND BASINS)	N/A	WATERPROOF TO A HEIGHT OF NOT LESS THAN 150mm ABOVE THE VESSEL IF THE VESSEL IS WITHIN 75mm OF THE WALL.	WHERE THE VESSEL IS FIXED TO A WALL, WATERPROOF EDGES FOR EXTENT OF VESSEL.	WATERPROOF ALL TAP AND SPOUT PENETRATIONS WHERE THEY OCCUR IN A HORIZONTAL SURFACE.
LAUNDRIES AND WCS	WATER RESISTANT TO ENTIRE FLOOR.	WATERPROOF ALL WALL/FLOOR JUNCTIONS TO NOT LESS THAN 25mm ABOVE THE FINISHED FLOOR LEVEL, SEALED TO FLOOR.	WATERPROOF ALL WALL/FLOOR JUNCTIONS. WHERE A FLASHING IS USED THE HORIZONTAL LEG MUST BE NOT LESS THAN 40mm.	N/A

THE ABOVE INFORMATION IS FOR GENERAL GUIDANCE AND IS INDICATIVE ONLY. WATERPROOFING INSTALLERS TO COMPLY WITH ALL CURRENT CODES OF LEGISLATION WHICH TAKE PRECEDENCE OVER THIS SPECIFICATION.

WET AREA WAERPROOFING BY LICENSED AND ACCREDITED INSTALLER. CERTIFICATION TO BE PROVIDED TO BUILDING SURVEYOR. CONTRACTOR OR BUILDER TO DETERMINE THE APPROPRIATE WATERPROOFING IN ACCORDANCE WITH AS3740 PART 10.2 OF N.C.C AND TO NOTIFY THE BUILDING SURVEYOR FOR INSPECTION ARRANGEMENTS DURING INSTALLATION.

ENERGY EFFICIENCY - GENERAL

STATED R VALUES ARE FOR ADDITIONAL INSULATION REQUIRED AND ARE NOT RT VALUES (TOTAL SYSTEM VALUE)

INSULATION TO BE INSTALLED TO MANUFACTURERS SPECIFICATIONS AND ANY RELEVANT STANDARDS

BULK INSULATION IS NOT TO BE COMPRESSED AS THIS REDUCES THE EFFECTIVE R RATING

N.C.C 2022 TAS PART H6

IN TASMANIA, FOR NCC PART H6 REFER TO NCC 2019 AMENDMENT 1 PART 2.6; FOR NCC PART 13.1 REFER TO NCC 2019 PART 3.12

N.C.C 2019 3.12.0 (A)

PERFORMANCE REQUIREMENT P2.6.1 FOR THE THERMAL PERFORMANCE OF THE BUILDING IS SATISFIED BY COMPLYING WITH:

3.12.0.1 - FOR REDUCING THE HEATING AND COOLING LOADS

TO REDUCE HEATING AND COOLING LOADS MUST ACHIEVE AN ENERGY RATING USING HOUSING ENERGY RATING SOFTWARE OF NOT LESS THAN 6 STARS.

3.12.1.1 - FOR BUILDING FABRIC THERMAL INSULATION

BUILDER TO ENSURE THAT ALL INSULATION COMPLIES WITH AS/NZS 4859.1 AND BE INSTALLED TO N.C.C 3.12.1.1.

3.12.1.2(e) - FOR COMPENSATING FOR A LOSS OF CEILING INSULATION

REFER TO ATTACHED THERMAL PERFORMANCE CERTIFICATE

(i) IF ALLOWANCE HAS BEEN MADE FOR CEILING PENERATIONS IN NATHERS (FIRST RATE 5) CERTIFICATION PROCESS THEN NO FURTHER ACTION REQUIRED.

(ii) IF NO ALLOWANCE HAS BEEN MADE FOR CEILING PENETRATIONS IN NATHERS (FIRST RATE 5) CERTIFICATION PROCESS THEN CEILING PENETRATION AREA MUST BE CALCULATED AND THE NECESSARY ADJUSTMENT MADE TO THE SPECIFIED INSULATION AS PER TABLE 3.12.1.1B OF NCC

3.12.1.5(c) AND 3.12.1.5(d) - FOR FLOOR EDGE INSULATION

FOR CONCRETE SLAB ON GROUND WITH IN SLAB HEATING OR COOLING.

3.12.3 - FOR BUILDING SEALING

3.12.3.1 - CHIMNEYS AND FLUES

THE CHIMNEY OR FLUE OF AN OPEN SOLID FUEL BURNING APPLIANCE MUST BE PROVIDED WITH A DAMPER OR FLAP THAT CAN BE CLOSED TO SEAL THE CHIMNEY OR FLUE.

3.12.3.2 - ROOF LIGHTS

(a) A ROOF LIGHT MUST BE SEALED, OR CAPABLE OF BEING SEALED WHEN SERVING:

(i) A CONDITIONED SPACE; OR

(ii) A HABITABLE ROOM IN CLIMATE ZONES 4, 5, 6, 7 OR 8

(b) A ROOF LIGHT REQUIRED BY (a) TO BE SEALED, OR CAPABLE OF BEING SEALED MUST BE CONSTRUCTED WITH:

(i) AN IMPERFORATE CEILING DIFFUSER OR THE LIKE INSTALLED AT A CEILING OR INTERNAL LINING LEVEL; OR

(ii) A WATERPROOF SEAL; OR

(iii) A SHUTTER SYSTEM READILY OPERATED MANUALLY, MECHANICALLY OR ELECTRONICALLY BY THE OCCUPANT.

3.12.3.3 - EXHAUST FANS

AN EXHAUST FAN MUST BE FITTED WITH A SEALING DEVICE SUCH AS A SELF CLOSE DAMPER, FILTER OR THE LIKE WHEN SERVING:

(a) A CONDITIONED SPACE; OR

(b) A HABITABLE ROOM IN THE CLIMATE ZONES 4, 5, 6, 7 OR 8.

3.12.3.5 - CONSTRUCTION OF ROOF, WALLS AND FLOORS

(a) ROOFS, EXTERNAL WALLS, EXTERNAL FLOORS AND AN OPENING SUCH AS A WINDOW FRAME, DOOR FRAME, ROOF LIGHT FRAME OR THE LIKE MUST BE CONSTRUCTED TO MINIMISE AIR LEAKAGE IN ACCORDANCE WITH (b) WHEN FORMING PART OF THE EXTERNAL FABRIC OF:

(i) A CONDITIONED SPACE; OR

(ii) A HABITABLE ROOM IN CLIMATE ZONE 4, 5, 6, 7 OR 8.

(b) CONSTRUCTION REQUIRED BY (a) MUST BE:

(i) ENCLOSED BY AN INTERNAL LINING SYSTEM THAT ARE CLOSE FITTING AT CEILING, WALL AND FLOOR JUNCTIONS; OR

(ii) SEALED BY CAULKING, SKIRTING, ARCHITRAVES, CORNICES OR THE LIKE.

3.12.3.6 - EVAPORATIVE COOLERS

AN EVAPORATIVE COOLER MUST BE FITTED WITH A SELF CLOSING DAMPER OR THE LIKE WHEN SERVING:

(a) A HEATED SPACE; OR

(b) A HABITABLE ROOM IN CLIMATE ZONES 4, 5, 6, 7 OR 8.

3.12.5.5 - ARTIFICIAL LIGHTING

(a) LAMP POWER DENSITY OR ILLUMINATION POWER DENSITY OF AN ARTIFICIAL LIGHT, EXCLUDING HEATING THAT EMITS LIGHT, MUST NOT EXCEED THE ALLOWANCE OF:

(i) 5W/m² IN A CLASS 1 BUILDING

(ii) 4W/m² ON A VERANDAH, BALCONY OR THE LIKE ATTACHED TO A CLASS 1 BUILDING (NOT EXCLUDING EAVE PERIMETER LIGHTS);

(iii) 3W/m² IN A CLASS 10A BUILDING ASSOCIATED WITH A CLASS 1 BUILDING.

(b) THE ILLUMINATION POWER DENSITY ALLOWANCE IN (a) MAY BE INCREASED BY DIVIDING IT BY THE ILLUMINATION POWER DENSITY ADJUSTMENT FACTOR FOR A CONTROL DEVICE AS PER N.C.C TABLE 3.12.5.3.

Waffle Pod Allowances:

- R0.6 - 175mm DEEP

- R0.7 - 225mm DEEP

- R0.8 - 300mm DEEP

- R0.9 - 375mm DEEP

Exhibited

SUBJECT TO NCC 2022 (1 MAY 2023)

WATERPROOFING & PLUMBING CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

WILSON HOMES

SPECIFICATION: DESIGNER

COPYRIGHT: © 2026

REVISION	DRAWN	CLIENT:
7 CONSOLIDATED PROPOSAL 3 UPDATE	MFC 28/03/2026	POOJA WIJERATNE & MENAKA DILSHAN
8 PRELIM PLANS - INITIAL ISSUE	TNG 23/04/2026	ADDRESS: 50 LOGAN RD, EVANDALE TAS 7212
9 PRELIM PLANS - AMENDMENTS	PL1 07.05.2026	LOT / SECTION / CT: 2 / - / 186056
10 PRELIM PLANS- DRIVEWAY UPDATE	RT2 11/05/2026	COUNCIL: NORTHERN MIDLANDS
11 PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV 21/05/2026	

HOUSE DESIGN: WOODBRIDGE 24

FACADE DESIGN: CLASSIC

SHEET TITLE: WET AREA & ENERGY EFFICIENCY NOTES

SHEET No.: 23 / 26

HOUSE CODE: H-WDNWBG10SA

FACADE CODE: F-WDNWBG10CLASA

SCALES:

DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.

714562

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

File Location: D:\Truong Vu\OBSC\COLOUR & VARIATIONS\714562 - Dilshan\MITek Issued\714562 - Dilshan - AC24 - Prelim - 2026.05.21.jpg

Template Version: 24.041

Exhibited

Requirements for Building In Bushfire Hazard Areas

Building Act 2016

Directors Determination - Bushfire Hazard Areas

V1.1, dated 08 April 2021

Deemed-to-Satisfy Requirements (Part 2.3)

2.3.1 Design and construction

(1) Building work in a bushfire-prone area must be designed and constructed in accordance with either: -

(a) AS 3959-2018; or

(b) Standard for Steel Framed Construction in Bushfire Areas published by the National Association of Steel Framed Housing Inc. (NASH).

as appropriate for a BAL determined for that site using table 2.6 of AS 3959.

(2) Subclause (1)(a) is only applicable to the following:

(a) a Class 1, 2 or 3 building; or

(b) a Class 10a building or deck associated with a Class 1, 2 or 3 building.

(3) Subclause (1)(b) is only applicable to the following:

(a) a Class 1 building; or

(b) a Class 10a building or deck associated with a Class 1 building.

(4) Despite subsection (1) permissible, variations from requirements specified in 1(a) and 1(b) are as specified in Table 1.

(5) Despite subsections (1) and (4), performance requirements for buildings subject to BAL 40 or BAL Flame Zone (BAL-FZ) are not satisfied by compliance with subsections (1) or (4).

2.3.2 Property Access

(1) A new building in a bushfire-prone area must be provided with property access to the building area and the firefighting water point, accessible by a carriageway, designed and constructed as specified in subclause (4).

(2) For an addition or alteration to an existing building in a bushfire-prone area, if there is no property access available property access must be provided to the building area and the firefighting water point accessible by a carriageway as specified in subclause (4).

(3) An addition or alteration to an existing building in a bushfire-prone area must not restrict any existing property access to the building area or to water supply for firefighting.

(4) Vehicular access from a public road to a building must:

(a) comply with the property access requirements specified in Table 2;

(b) include access from a public road to within 90 metres of the furthest part of the building measured as a hose lay; and

(c) include access to the hardstand area for the firefighting water point.

2.3.3 Water Supply for Fire fighting

(1) A new building constructed in a bushfire-prone area, must be provided with a water supply dedicated for fire fighting purposes as specified in Table 3A or Table 3B.

(2) For an addition or alteration to an existing building in a bushfire-prone area, if there is no water supply for firefighting available the building must be provided with a water supply dedicated for firefighting purposes which complies with the requirements specified in Table 3A or Table 3B.

2.3.4 Hazard Management Areas

(1) A new building, and an existing building in the case of an addition or alteration to a building, in a bushfire-prone area must be provided with a hazard management area.

(2) The hazard management area must comply with the requirements specified in Table 4.

(3) The hazard management area for a particular BAL must have the minimum dimensions required for the separation distances specified for that BAL in Table 2.6 of AS 3959.

(4) The hazard management area must be established and maintained such that fuels are reduced sufficiently, and other hazards are removed such that the fuels and other hazards do not significantly contribute to the bushfire attack.

2.3.5 Bushfire emergency plan

(1) An emergency plan must be provided for:

(a) a new building;

(b) an existing building in the case of an addition or alteration to a building;

(c) an existing building in the case of a change of building class;

(d) a building associated with the use, handling, generation or storage of a hazardous chemical or explosive; in a bushfire-prone area.

(2) A bushfire emergency plan must comply with the requirements specified in Table 5.

7. Interpretation of Tables

(1) For the purposes of the deemed-to-satisfy provisions in clause 2.3 of this Determination, Tables 1, 2, 3A, 3B, 4, and 5 must be complied with in the following way:

(a) for a particular element specified in column 1, the corresponding requirement specified in column 2 must be complied with.

Table 1 - Construction Requirements & Construction Variations

Column 1		Column 2
ELEMENT		REQUIREMENT
A.	Straw Bale Construction	May be used in exposures up to and including BAL 19.
B.	Shielding provisions under Section 3.5 of AS3959-2018	To reduce construction requirements due to shielding, building plans must include suitable detailed elevations or plans that demonstrate that the requirements of Section 3.5 of the Standard can be met.
		Comment: Application of Section 3.5 of the Standard cannot result in and assessment of BAL-LOW.

Table 2 - Requirements for Property Access

Column 1		Column 2
ELEMENT		REQUIREMENT
A.	Property access length is less than 30 metres; or access is not for a fire appliance to access a water connection point.	There are no specified design and construction requirements.
B.	Property access length is 30 metres or greater; or access for a fire appliance to a water connection point.	The following design and construction requirements apply to property access: (1) All-weather construction; (2) Load capacity of at least 20 tonnes, including for bridges and culverts; (3) Minimum carriageway widths of 4 metres; (4) Minimum vertical clearance of 4 metres; (5) Minimum horizontal clearance of 0.5 metres from the edge of the carriageway; (6) Cross falls of less than 3° (1:20 or 5%); (7) Dips less than 7° (1:8 or 12.5%) entry and exit angle; (8) Curves with a minimum inner radius of 10 metres; (9) Maximum gradient of 15° (1:3.5 or 28%) for sealed roads, and 10° (1:5.5 or 18%) for unsealed roads; and (10) Terminate with a turning area for fire appliances provided by one of the following: (a) A turning circle with a minimum inner radius of 10 metres; (b) A property access encircling the building; or (c) A hammerhead "T" or "Y" turning head 4 metres wide and 8 metres long.
C.	Property access length is 200 metres or greater.	The following design and construction requirements apply to property access: (1) The Requirements for B above; and (2) Passing bays of 2 metres additional carriageway width and 20 metres length provided every 200 metres.
D.	Property access length is greater than 30 metres, and access is provided to 3 or more properties.	The following design and construction requirements apply to property access: (1) Complies with Requirements for B above; and (2) Passing bays of 2 metres additional carriageway width and 20 metres length must be provided every 100 metres.

Table 3A - Reticulated Water Supply for Firefighting

Column 1		Column 2
ELEMENT		REQUIREMENT
A.	Distance between building area to be protected and water supply	The following requirements apply: (1) The building area to be protected must be located within 120 metres of a fire hydrant; and (2) The distance must be measured as a hose lay, between the water connection point and the furthest part of the building area.
B.	Design criteria for fire hydrants	The following requirements apply: (1) Fire hydrant system must be designed and constructed in accordance with TasWater Supplement to Water Supply Code of Australia WSA 03 - 2011-3.1 MRWA Edition 2.0; and (2) Fire hydrants are not installed in parking areas.
C.	Hardstand	A hardstand area for fire appliances must be provided: (1) no more than three metres from the hydrant, measured as a hose lay; (2) No closer than six metres from the building area to be protected; (3) With a minimum width of three metres constructed to the same standard as the carriageway; and (4) Connected to the property access by a carriageway equivalent to the standard of the property access

Table 3B - Static Water Supply for Firefighting

Column 1		Column 2
ELEMENT		REQUIREMENT
A.	Distance between building area to be protected and water supply	The following requirements apply: (a) The building area to be protected must be located within 90 metres of the water connection point of a static water supply; and (b) The distance must be measured as a hose lay, between the water connection point and the furthest part of the building area.
B.	Static Water Supplies	A static water supply: (a) May have a remotely located offtake connected to the static water supply; (b) May be a supply for combined use (fire fighting and other uses) but the specified minimum quantity of fire fighting water must be available at all times; (c) Must be a minimum of 10,000 litres per building area to be protected. This volume of water must not be used for any other purpose including fire fighting sprinkler or spray systems; (d) Must be metal, concrete or lagged by non-combustible materials if above ground; and (e) If a tank can be located so it is shielded in all directions in compliance with Section 3.5 of AS 3959-2018, the tank may be constructed of any material provided that the lowest 400 mm of the tank exterior is protected by: (i) metal; (ii) non-combustible material; or (iii) fibre-cement a minimum of 6 mm thickness.
C.	Fittings, pipework and accessories (including stands and tank supports)	Fittings and pipework associated with a water connection point for a static water supply must: (a) Have a minimum nominal internal diameter of 50mm; (b) Be fitted with a valve with a minimum nominal internal diameter of 50mm; (c) Be metal or lagged by non-combustible materials if above ground; (d) Where buried, have a minimum depth of 300mm (e) Provide a DIN or NEN standard forged Storz 65 mm coupling fitted with a suction washer for connection to fire fighting equipment; (f) Ensure the coupling is accessible and available for connection at all times; (g) Ensure the coupling is fitted with a blank cap and securing chain (minimum 220 mm length); (h) Ensure underground tanks have either an opening at the top of not less than 250 mm diameter or a coupling compliant with this Table; and (i) Where a remote offtake is installed, ensure the offtake is in a position that is: (i) Visible; (ii) Accessible to allow connection by fire fighting equipment; (iii) At a working height of 450 - 600mm above ground level; and (iv) Protected from possible damage, including damage by vehicles.
D.	Signage for static water connections	(1) The water connection point for a static water supply must be identified by a sign permanently fixed to the exterior of the assembly in a visible location. The sign must: (a) comply with water tank signage requirements within AS 2304; or (b) comply with the TFS Water Supply Signage Guideline.
E.	Hardstand	A hardstand area for fire appliances must be provided: (a) No more than three metres from the water connection point, measured as a hose lay (including the minimum water level in dams, swimming pools and the like); (b) No closer than six metres from the building area to be protected; (c) With a minimum width of three metres constructed to the same standard as the carriageway; and (d) Connected to the property access by a carriageway equivalent to the standard of the property access.

Table 4 - Requirements for Hazard Management Area

Column 1		Column 2
ELEMENT		REQUIREMENT
A.	Hazard managements areas for new buildings on lots provided with a BAL at the time of subdivision.	A new building must: (a) Be located on the lot so as to be provided with a HMA no smaller than the required separation distances for the BAL determined at the time of the subdivision; and (b) Have a HMA established in accordance with a certified bushfire hazard management plan.
B.	Hazard management areas for new buildings on lots not provided with a BAL at the time of sub division.	A new building must: (a) Be located on the lot so as to be provided with a HMA no smaller than the separation distances required for BAL 29; and (b) Have an HMA established in accordance with a certified bushfire hazard management plan.
C.	Hazard management areas for alterations or additions to buildings.	An alteration or addition to a building must: (a) Be located on the lot so as to be provided with a HMA which: (i) Has the separation distances required for the BAL assessed for the construction of the existing building; or (ii) In the case of a building without an existing BAL assessment, is no smaller than the separation distances required for BAL 29; and (b) Have an HMA established in accordance with a certified bushfire hazard management plan.
D.	Hazard management areas for new buildings and additions and alterations to buildings classified as an accommodation building BCA Class 1b, BCA Class 2, or BCA Class 3, other than communal residence for persons with a disability, a respite centre or a residential aged care facility or similar.	A new building or an alteration or addition must: (a) Be located on the lot so as to be provided with HMAs no smaller than the separation distances required for BAL 12.5; and (b) have a HMA established in accordance with a certified bushfire hazard management plan.
E.	Hazard management areas for new buildings and additions and alterations to existing buildings classified as vulnerable use as defined in the relevant planning scheme.	A new building or an addition or alteration including change of use must: (a) Be located on the lot so as to be provided with HMAs no smaller than the separation distances required for BAL 12.5; and (b) have a HMA established in accordance with a certified bushfire hazard management plan.
F.	Hazard management areas for new buildings or additions and alterations to buildings associated with the use, handling, generation or storage of a hazardous chemical or explosive.	A new building or an alteration or addition, including change of use, for a building determined as a hazardous use must: (a) Be located on the lot so as to be provided with a HMA no smaller than the required separation distances for the BAL determined in the certified bushfire hazard management plan; and (b) Have a HMA established in accordance with a certified bushfire hazard management plan.

Table 5 - Requirements for Emergency Planning

Column 1		Column 2
ELEMENT		REQUIREMENT
A.	Bushfire emergency plans	An emergency plan must be developed for the site which is: (a) Consistent with TFS Bushfire Emergency Planning Guidelines; and (b) Approved by TFS or a person accredited by the TFS.

SUBJECT TO NCC 2022

(1 MAY 2023)

WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE:

DATE:

SIGNATURE:

DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED
AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

REFER TO SHEET 1 (COVER SHEET) FOR ALL BUILDING INFORMATION REGARDING:
- SUSTAINABILITY REQUIREMENTS
- SITE CLASSIFICATION
- GENERAL BUILDING INFORMATION

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.



SPECIFICATION:

DESIGNER

COPYRIGHT:

© 2026

REVISION

DRAWN

CLIENT:

POOJA WIJERATNE & MENAKA DILSHAN

ADDRESS:

50 LOGAN RD, EVANDALE TAS 7212

LOT / SECTION / CT:

2 / - / 186056

COUNCIL:

NORTHERN MIDLANDS

HOUSE DESIGN:

WOODBIDGE 24

FACADE DESIGN:

CLASSIC

SHEET TITLE:

BUILDING ACT BUSHFIRE HAZARD AREAS

SHEET No.:

24 / 26

HOUSE CODE:

H-WDNWBG10SA

FACADE CODE:

F-WDNWBG10CLASA

SCALES:

DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.

714562

AS3959 (2018)

All specifications are per AS3959 (2018) and Wilson Homes request. Other materials and options may be available, refer to AS3959 for full list of compliant materials.

5.1 GENERAL

A building assessed in Section 2 as being BAL -12.5 shall comply with Section 3 and Clauses 5.2 to 5.8.

Any element of construction or system that satisfies the test criteria of AS 1530.8.1 may be used in lieu of the applicable requirements contained in Clauses 5.2 to 5.8 (see Clause 3.8).

NOTE: BAL -12.5 is primarily concerned with protection from ember attack, and radiant heat up to and including 29kW/m² where the site is less than 100 m from the source of the bushfire attack.

5.2 SUBFLOOR SUPPORTS

This Standard does not provide construction requirements for subfloor supports where the subfloor space is enclosed with -
(a) a wall that complies with Clause 5.4; OR
(b) a mesh or perforated sheet with a maximum aperture of 2mm, made of corrosion resistant steel, bronze or aluminium; OR
(c) a combination of Items (a) and (b).

NOTE: This requirement applies to the subject building only and not to verandas, decks, steps, ramps and landings (see Clause 5.7)

C5.2 Combustible materials stored in the subfloor space may be ignited by embers and cause and impact to the building.

5.3 FLOORS

5.3.1 GENERAL

This Standard does not provide construction requirements for concrete slabs on the ground.

5.3.2 ELEVATED FLOORS

5.3.2.1 ENCLOSED SUBFLOOR SPACE

This standard does not provide consturction requirements for elevated floors, including bearers and joists and flooring, where the subfloor space is enclosed with

- (a) a wall that complies with Clause 5.4; OR
- (b) a mesh perforated sheet with a maximum aperture of 2mm, made of corrosion resistant steel, bronze or aluminium; OR
- (c) a combination of Items (a) and (b) above.

5.3.2.2 UNENCLOSED SUBFLOOR SPACE

Where the subfloor space is unenclosed, the bearers, joists and flooring, less than 400mm above finished ground level, shall be one of the following -

- (a) Materials that comply with the following:
 - (i) Bearers and joists shall be -
 - (A) non-combustible; OR
 - (B) bushfire-resisting timber (see Appendix F); OR
 - (C) a combination of Items (A) and (B) above.
 - (ii) Flooring shall be -
 - (A) non-combustible; OR
 - (B) bushfire-resisting timber (see Appendix F); OR
 - (C) timber (other than bushfire-resisting timber), particleboard or plywood flooring where the underside is lined with sarking-type material or mineral wool insulation; OR
 - (D) a combination of any Items (A), (B) or (C) above.
- OR
- (b) A system complying with AS1530.8.1

This standard does not provide construction requirements for elements of elevated floors, including bearers, joists and flooring, if the underside of the element is 400mm or more above finished ground level.

5.4.1 WALLS

The exposed components of an external wall that is less than 400 mm from the ground or less than 400 mm above decks, carport roofs, awnings and similar fittings having an angle of less than 18 degrees to the horizontal and extending more than 110 mm in width from the wall (see Figure D3, Appendix D) shall be:

- (a) Non-combustible material.
NOTE: Examples include, but are not limited to, the following (with a minimum of 90 mm inthickness):
 - (i) Full masonry or masonry veneer walls with an outer leaf of clay, concrete, calcium silicate or natural stone.
 - (ii) Precast or in situ walls of concrete or aerated concrete.
 - (iii) Earth wall including mud brick. OR
- (b) Timber logs of a species with a density of 680kg/m³ or greater at a 12 percent moisture content; of a minimum nominal overall thickness of 90mm and a minimum thickness of 70mm (see Clause 3.11); and gauge planed. OR
- (c) Cladding that is fixed externally to a timber-framed or a steel-framed wall that is sarked on the outside of the frame and is -
 - (i) non-combustible material; OR
 - (ii) fibre cement a minimum of 6mm in thickness; OR
 - (iii) bushfire-resisting timber (see Appendix F); OR
 - (iv) a timber species as specified in Paragraph E1, Appendix E; pr
 - (v) a combination of any of Items (i), (ii), (iii) or (iv) above. OR
- (d) A combination of any items (a), (b) or (c) above.

5.4.2 JOINTS

All joints in the external surface material of walls shall be covered, sealed, overlapped, backed or butt-jointed.

Exhibited

5.4.3 VENTS AND WEEPHOLES

Except for exclusions provided in Clause 3.6, vents and weepholes in external walls shall be screened with a mesh made of corrosion-resistant steel, bronze or aluminium.

5.5.1 BUSHFIRE SHUTTERS

Where fitted, bushfire shutters shall comply with Clause 3.7 and be made from -
(a) non-combustible material; OR
(b) a timber species as specified in Paragraph E1, Appendix E; OR
(c) bushfire-resisting timber (see Appendix F); OR
(d) a combination of Items (a), (b) and (c) above.

5.5.2 SCREENS FOR WINDOWS AND DOORS

Where fitted, screens for windows and doors shall have a mesh or perforated sheet made of corrosion-resistant steel, bronze or aluminium.

The frame supporting the mesh or perforated sheet shall be made from -
(a) metal; OR
(b) bushfire-resisting timber (see Appendix F); OR
(c) a timber species as specified in Paragraph E2, Appendix E.

5.5.3 WINDOWS AND SIDELIGHTS

Window assemblies shall:
(a) be completely protected by a bushfire shutter that complies with Clause 3.7 and clause 5.5.1; OR
(b) Be completely protected externally by screens that conform with Clause 3.6 and Clause 5.5.2
(c) Conform with the following:

- (i) Frame material For window assemblies less than 400mm from the ground or less than 400mm above decks, carport roofs, awnings and similar elements or fittings having and angle less than 18 degrees to the horizontal and extending more than 110mm in width from the window frame (see Figure D3, Appendix D), window frames and window joinery shall be made from:
 - (A) Bushfire-resisting timber (see Appendix F) OR
 - (B) A timber species as specified in Paragraph E2, Appendix F); OR
 - (C) Metal. OR
 - (D) Metal-reinforced uPVC. The reinforcing members shall be made from aluminium, stainless steel, or corrosion-resistant steel.
- There are no specific restrictions on frame material for all other windows.
- (ii) Hardware There are no specific restrictions on hardware for windows.
- (iii) Glazing Where glazing is less than 400mm from the ground or less than 400mm above decks, carport roofs, awnings and similar elements or fittings having and angle less than 18 degrees to the horizontal and extending more than 110mm in width from the window frame (see Figure D3, Appendix D), this glazing shall be Grade A safety glass a minimum of 4mm in thickness or glass blocks with no restriction on glazing methods.

NOTE: Where double-glazed assemblies are used above, the requirements apply to the external pane of the glazed assembly only. For all other glazing, annealed glass may be used in accordance with AS 1288.
(iv) Seals and weather strips There are no specific requirements for seals and weather strips at this BAL level.
(v) Screens The openable portions of windows shall be screened internally or externally with screens that conform with Clause 3.6 and Clause 5.5.2.

C5.5.3 For Clause 5.5.3(c), screening of the openable portions of all windows is required in all BAL's to prevent the entry of embers to the building when the window is open.
For Clause 5.5.3 (c)(v), screening of the openable and fixed portions of some windows is required to reduce the effects of radiant heat on some tyes of glass. If the screening is required to reduce the effects of radiant heat on glass, and has to be externally fixed.
For Clause 5.5.3 (c)(v), if the screening is required only to prevent the entry of embers, the screening may be fitted externally or internally.

5.5.4 DOORS SIDE-HUNG EXTERNAL DOORS (including French Doors, Panel Fold and Bi-fold Doors)

Side-hung external doors, including French doors, panel fold and bi-fold doors, shall -
(a) Be protected by bushfire shutters that comply with Clause 3.7 and Clause 5.5.1.

- OR
- (b) Be protected externally by screens that comply with Clause 3.6 and Clause 5.5.2.
- OR
- (c) conform with the following:
 - (i) Door panel material Materials shall be -
 - (A) non combustible; OR
 - (B) solid timber, laminated timber or reconstituted timber door, having a minimum thickness of 35mm for the first 400mm above the threshold; OR
 - (C) hollow core, solid timber, laminated timber or reconstituted timber with a non-combustible kickplate on the outside for the first 400mm above the threshold; OR
 - (D) hollow core, solid timber, laminated timber or reconstituted timber protected externally by a screen that complies with Clause 5.5.2; OR
 - (E) for fully framed glazed door panels, the framing is made from metal or bushfire resisting timber (see Appendix F), or a timber species as specified in Paragraph E2, Appendix E or uPVC.
 - (ii) Door frame material Door frames shall be made from:
 - (A) Bushfire-resisting timber (see Appendix F). OR
 - (B) a timber species as specified in Paragraph E2 of Appendix E;

- OR
- (C) Metal. OR
- (D) Metal-reinforced PVC-U. The reinforcing members shall be made from aluminium, stainless steel, or corrosion-resistant steel.
- (iii) Hardware There are no specific requirements for hardwarea at this BAL level.
- (iv) Glazing the glazing shall be Grade A safety glass a minimum of 4mm in thickness, or glass blocks with no restriction on glazing methods. NOTE: Where double glazed units are used the above requirements apply to the external face of the window assembly only.
- (v) Seals and weather strips Weather strips, draft excluders or draft seals shall be installed.
- (vi) Screens There are no specific requirements for hardwarea at this BAL level.
- (vii) Doors shall be tight-fitting to the door frame and to an abutting door, if applicable.

5.5.5 DOORS-SLIDING DOORS

Sliding doors shall:
(a) Be protected by bushfire shutters that comply with Clause 3.7 and Clause 5.5.1.
OR
(b) Be protected externally by screens that comply with Clause 3.6 and Clause 5.5.2.
OR
(c) conform with the following:

- (i) Frame material The material for door frames, including fully framed glazed doors, shall be -
 - (A) Bushfire-resisting timber (see Appendix F). OR
 - (B) a timber species as specified in Paragraph E2 of Appendix E; OR
 - (C) Metal. OR
 - (D) Metal-reinforced uPVC. The reinforcing members shall be made from aluminium, stainless steel, or corrosion-resistant steel.
- (ii) Hardware There are no specific requirements for hardwarea at this BAL level.
- (iii) Glazing Where doors incorporate glazing, the glazing shall be Grade A safety glass a minimum of 4mm in thickness,
- (iv) Seals and weather strips There are no specific requirements for hardwarea at this BAL level.
- (v) Screens There are no specific requirements for hardwarea at this BAL level.
- (vi) Sliding panels Sliding panels shall be tight-fitting in the frames.

5.5.6 DOORS-VEHICLE ACCESS DOORS (GARAGE DOORS)

The following apply to vehicle access doors:
(a) The lower portion of a vehicle access door that is within 400mm of the ground when the door is closed (see Figure D4, Appendix D) shall be made from -

- (i) non combustible material; OR
- (ii) bushfire-resisting timber (see Appendix F); OR
- (iii) fibre- cement sheet, a minimum of 6mm in thickness; OR
- (iv) a timber species as specified in Paragraph E1, Appendix E; OR
- (iv) a combination of any Items (i), (iii) or (iv) above.

(b) All vehicle access doors doors shall be fitted with suitable weather strips, draught seals or brushses. Door assemblies fitted with guide tracks do not need edge gap protection.
NOTES:
1 Refer to AS/NZS 4505 for door types.
2 Gaps of door edges or building elements should be protected as per Section 3.
C5.5.6(b) These guide tracks do not provide a direct passage for embers into the building.
(c) Vehicle access doors with ventilation slots shall be protected in accordance with Clause 3.6.

5.6.1 ROOFS - GENERAL

The following apply to all types of roofs and roofing systems:
(a) Roof tiles, roof sheets and roof-covering accessories shall be non-combustible.
(b) The roof/wall junction shall be sealed, or otherwise protected in accordance with Clause 3.6.
(c) Roof ventilation openings, such as gable and roof vents, shall be fitted with ember guards made of non-combustible material or a mesh or perforated sheet conforming with Clause 3.6 and made of corrosion-resistant steel, bronze or aluminium.
(d) Only evaporative coolers manufactured in accordance with AS/NZS 60335.2.98 shall be used. Evaporative coolers with an internal damper to prevent the entry of embers into the roof space need to be screened externally.

5.6.2 TILED ROOFS

Tiled roofs shall be fully sarked. The sarking shall -
(a) be located on top of the roof framing, except that the roof battens may be fixed above the sarking;
(b) cover the entire roof area including ridges and hips; and
(c) extend into gutters and valleys.

5.6.3 SHEET ROOFS

Sheet roofs shall—
(a) be fully sarked in accordance with Clause 5.6.2, except that foil-backed insulation blankets may be installed over the battens; and
(b) have any gaps sealed at the fascia or wall line and at valleys, hips and ridges by -
(i) a mesh or perforated sheet that conforms with Clause 3.6 and that is made of corrosion-resistant steel, bronze or aluminium; OR
(ii) mineral wool; OR
(iii) other non-combustible material; OR
(iv) a combination of any of Items (i), (ii) or (iii) above.
C5.6.3 - Sarking is used as a secondary form of ember protection for the roof space to account for minor gaps that may develop in sheet roofing.

5.6.4 VERANDA, CARPORT AND AWNING ROOFS

The following apply to veranda, carport and awning roofs:
(a) A veranda, carport or awning roof forming part of the main roof space [see Figure D1(a), Appendix D] shall meet all the requirements for the main roof, as specified in Clauses 5.6.1, to 5.6.6.
(b) A veranda, carport or awning roof separated from the main roof space by an external wall [see Figures D1(b) and D1(c), Appendix D] complying with Clause 5.4 shall have a non-combustible roof covering, except where the roof covering is a translucent or transparent material.
NOTE: There is no requirement to line the inderside of a veranda, carport or awning roof that is separated from the main roof space

5.6.5 ROOF PENETRATIONS

The following apply to roof penetrations:
(a) Roof penetrations, including roof lights, roof ventilators, roof-mounted evaporative cooling units, aerials, vent pipes and supports for solar collectors shall be sealed. The material used to seal the penetration shall be non-combustible.
(b) Openings in vented roof lights, roof ventilators or vent pipes shall conform with Clause 3.6 and be made of corrosion-resistant steel, bronze or aluminium.
NOTE: This requirement does not apply to a room sealed gas appliance. NOTE: A gas appliance designed such that air for combustion dose not enter from, or combustion products enter into, the room which the appliance is located.
(c) All overhead glazing shall be Grade A safety glass complying with AS 1288.
(d) Glazed elements in roof lights and skylights may be of polymer, provided a Grade A safety glass diffuser, complying with AS 1288, is installed under the glazing. Where glazing is an insulating glazing unit (IGU), Grade A toughened safety glass of minimum 4 mm in thickness shall be used in the outer pane of the IGU.
(e) Flashing elements of tubular skylights may be of a fire-retardant material, provided the roof integrity is maintained by an under-flashing of a material having a flammability index not exceeding five..
(f) Evaporative cooling units shall be fitted with non-combustible butterfly closers as close as practicable to the roof level, or the unit shall be fitted with non-combustible covers with a mesh or perforated sheet with a maximum aperture of 2mm, made of corrosion-resistant steel, bronze or aluminium .
(g) Vent pipes made from PVC are permitted.
(h) Eaves lighting shall be adequately sealed and not compromise the performance of the element.

5.6.6 EAVES LININGS, FASCIAS AND GABLES

The following apply to eaves linings, fascias and gables:
(a) Gables shall comply with Clause 5.4.
(b) Eaves penetrations shall be protected the same as for roof penetrations, as specified in Clause 5.6.5.
(c) Eaves ventilation openings shall be fitted with ember guards in accordance with Clause 3.6 and made of corrosion-resistant steel, bronze or aluminium
Joints in eaves linings, fascias and gables may be sealed with plastic joining strips or timber storm moulds.
This standard does not provide construction requirements for fascias, bargeboards and eaves linings.

5.6.7 GUTTERS AND DOWNPIPES

This Standard does not provide material requirements for downpipes. If installed, gutter and valley leaf guards shall be non-combustible. With the exception of box gutters, gutters shall be metal or PVC-U. Box gutters shall be non-combustible and flashed at the junction with the roof with noncombustible material.

5.7.1 VERANDAS, DECKS, STEPS AND LANDINGS - GENERAL

Decking may be spaced.
There is no requirement to enclose the subfloor spaces of verandas, decks, steps, ramps or landings.
C5.7.7 - Spaced decking is nominally spaced at 3 mm (in accordance with standard industry practice); however, due to the nature of timber decking with seasonal changes in moisture content, that spacing may range from 0 - 5 mm during service. It should be noted that recent research studies have shown that gaps at 5 mm spacing afford opportunity for embers to become lodged in between timbers, which may contribute to a fire. Larger gap spacings of 10 mm may preclude this from happening but such a spacing regime may not be practical for a timber deck.

5.7.2 ENCLOSED SUBFLOOR SPACES OF VERANDAS, DECKS, STEPS, RAMPS AND LANDINGS

5.7.2.1 Materials to enclose a subfloor space
This standard does not provide construction requirements for the materials used to enclose a subfloor space except where those materials are less than 400mm from the ground.
Where the materials used to enclose a subfloor space are less than 400mm from the ground, they shall conform with Clause 5.4.
5.7.2.2 Supports
This Standard does not provide construction requirements for support posts, columns, stumps, stringers, piers and poles.
5.7.2.3 Framing
This Standard does not provide construction requirements for the framing of verandas, decks, ramps or landings (i.e., bearers and joists).

5.7.2.4 Decking, stair treads and the trafficable surfaces of ramps and landings
This standard does not provide construction requirements for decking, stair treds and the trafficable surfaces and landings that are more than 300mm from a glazed element.

Decking, stair treads and the trafficable surfaces of ramps and landings less than 300mm (measured horizontally at deck level) from glazed elements that are less than 400mm (measured vertically) from the surface of the deck (see Figure D2, Appendix D) shall be made from -
(a) of non-combustible material; OR
(b) of bushfire-resisting timber (see Appendix F); OR
(c) a timber species as specified in Paragraph E1, Appendix E; or
(d) uPVC; or
(e) a combination of Items (a), (b), (c) or (d).

5.7.3 UNENCLOSED SUBFLOOR SPACES OF VERANDAS, DECKS, STEPS, RAMPS AND LANDINGS

5.7.3.1 Supports
This Standard does not provide construction requirements for support posts, columns, stumps, stringers, piers and poles.
5.7.3.2 Framing
This Standard does not provide construction requirements for the framing of verandas, decks, ramps or landings (i.e., bearers and joists).

5.7.3.3 Decking, stair treads and the trafficable surfaces of ramps and landings
This Standard does not provide construction requirements for deshing, stair treds and the trafficable surfaces of ramps and landings that are more than 300mm from a glazed element.
Decking, stair treads and the trafficable surfaces of ramps and landings less than 300mm (measured horizontally at deck level) from glazed elements that are less than 400mm (measured vertically) from the surface of the deck (see Figure D2, Appendix D) shall be made from -
(a) of non-combustible material; OR
(b) of bushfire-resisting timber (see Appendix F); OR
(c) a timber species as specified in Paragraph E1, Appendix E; or
(d) uPVC; or
(e) a combination of any of Items (a), (b), (c) or (d).

5.7.4 BALUSTRADES, HANDRAILS OR OTHER BARRIERS

This Standard does not provide construction requirements for balustrades, handrails and other barriers.

5.7.5 VERANDA POSTS

Verandah Posts -
(a) Shall be timber mounted on galvanised mounted shoes or stirrups with a clearance of no less than 75mm above adjacent ground level; or
(b) if less than 400mm (measured vertically) from the surface of the deck or ground (see Fig D2, Appendix D) shall be made from -

- (i) non-combustible material;or
- (ii) bushfire-resisting timber (see Appendix F); or
- (iii) a timbers species as specified in Paragraph E1, Appendix E; or
- (iv) a combination of any of items (a) or (b).

5.8 WATER AND GAS SUPPLY PIPES

Above-ground, exposed water and gas supply pipes shall be metal.

SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.




SPECIFICATION:		REVISION	DRAWN	CLIENT:		HOUSE DESIGN:		HOUSE CODE:	DO NOT SCALE DRAWINGS, USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE.
DESIGNER	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC 28/03/2026	POOJA WIJERATNE & MENAKA DILSHAN		WOODBRIDGE 24		H-WDNWBG10SA	
COPYRIGHT: © 2026	8	PRELIM PLANS - INITIAL ISSUE	TNG 23/04/2026	ADDRESS:		FACADE DESIGN:		FACADE CODE:	
	9	PRELIM PLANS - AMENDMENTS	PL1 07.05.2026	50 LOGAN RD, EVANDALE TAS 7212		CLASSIC		F-WDNWBG10CLASA	
	10	PRELIM PLANS- DRIVEWAY UPDATE	RT2 11/05/2026	LOT / SECTION / CT:	COUNCIL:	SHEET TITLE:	SHEET No.:	SCALES:	
	11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV 21/05/2026	2 / - / 186056	NORTHERN MIDLANDS	BAL 12.5 NOTES	25 / 26	714562	

Rafter Spacing	Product
Up to and including 600mm	EnviroSeal™ Roof Tile or EnviroSeal™ Roof Tile Plus
Over 600mm	EnviroSeal™ Roof Tile Safety

Figure 5.1. Tiled Roofs

- Install EnviroSeal roof tile sarking on top of the roof framing and below the roof battens.
- For further fixing details contact CSR technical support.

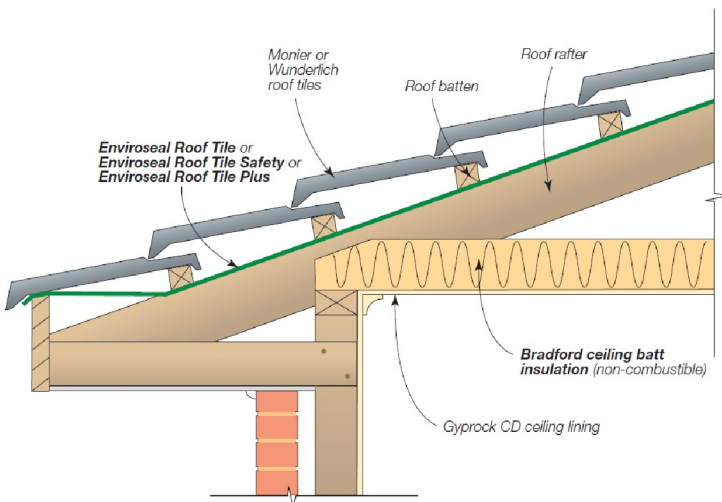

Application	Product
Sarking	EnviroSeal™ Resiwrap
Foil faced insulation blanket	Bradford Anticon™
Gap seal	Bradford Fireseal BAL 12.5 - 40 Blanket

Figure 5.2.1. Fascia Detail – Metal Roof (BAL12.5-40)

- Install EnviroSeal Resiwrap to the entire roof area over the top of the battens.
- Immediately above the fascia install BAL12.5 – 40 Blanket extending up the roof and over the first batten. Compress with the roof sheeting.
- For further fixing details contact CSR technical support.

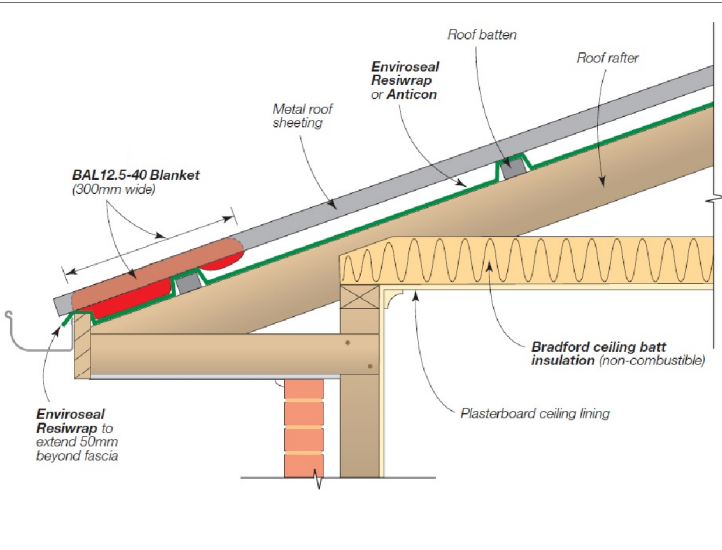


Figure 5.2.2. Valley Detail – Steel Roof (BAL-12.5 – BAL-40)

- Install EnviroSeal Resiwrap to the entire roof area over the top of the battens.
- BAL12.5 – 40 Blanket to be laid over the top of the sarking extending into the valley gutter. Compress with roof sheeting.
- For further fixing details contact CSR technical support.

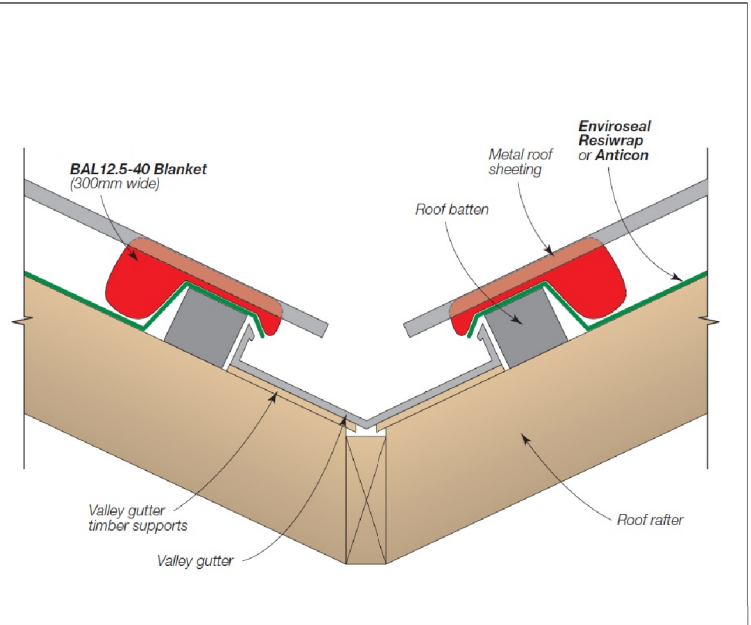


Figure 5.2.3. Barge Detail – Steel Roof (BAL-12.5 – BAL-40)

- Install EnviroSeal Resiwrap to the entire roof area over the top of the battens.
- At barge install BAL12.5 – 40 Blanket and compress with roof sheeting.
- For further fixing details contact CSR technical support.


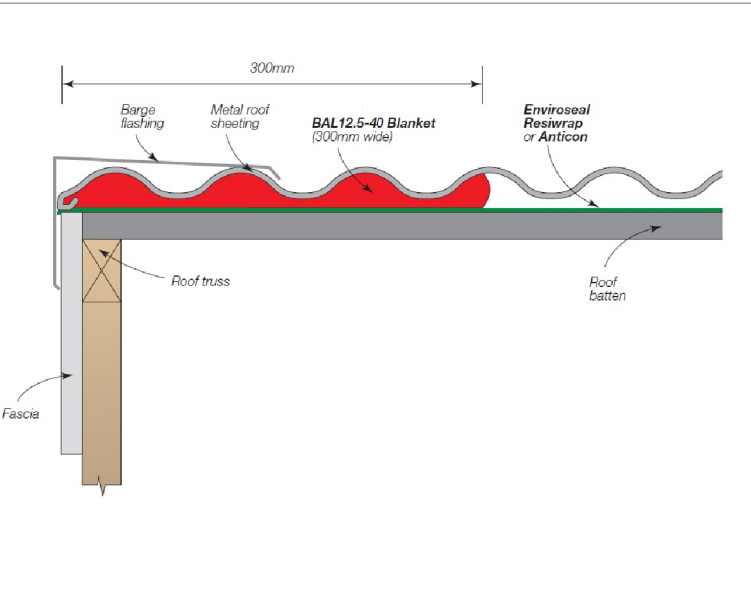


Figure 5.2.4. Hip/Ridge Detail – Steel Roof (BAL-12.5 – BAL-40)

- Install EnviroSeal Resiwrap to the entire roof area over the top of the battens.
- At the ridge/hip lay BAL12.5 – 40 Blanket over the gap between the roof sheets and compress with the ridge capping to the roof profile.
- For further fixing details contact CSR technical support.

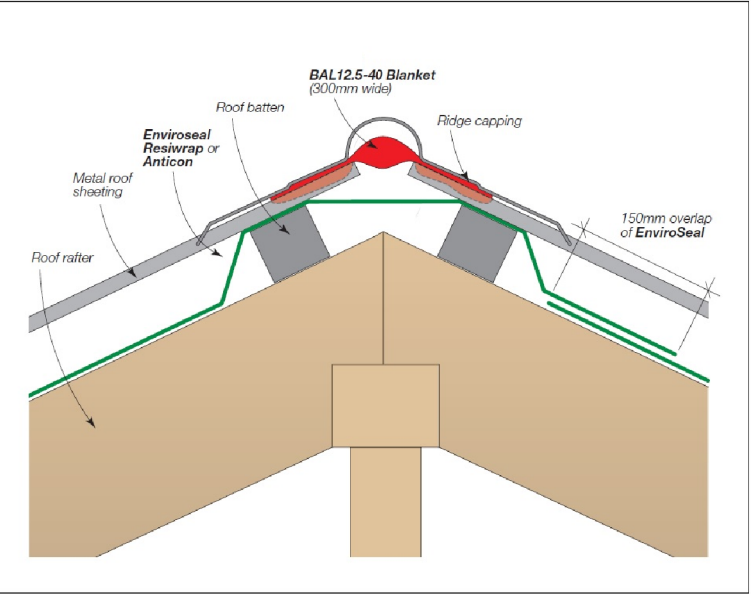

Details for the purpose of bushfire proofing only. To be printed in colour.

Images sourced from Bradfords "Bushfire Roofing System", Published 04/11.

Exhibited

BAL-12.5 BUSHFIRE REQUIREMENTS
SEE SHEET 1 (COVER SHEET) FOR DETAILS

© 2026 WILSON HOMES PTY LTD (ABN 96 126 636 897). THIS DRAWING IS AN ORIGINAL ARTISTIC WORK WITHIN THE MEANING OF THE COPYRIGHT ACT 1968 (CTH). WILSON HOMES PTY LTD IS THE OWNER OF COPYRIGHT IN THIS DRAWING. YOU HEREBY AGREE AND UNDERTAKE THAT YOU WILL NOT IN ANY WAY REPRODUCE, COPY, MODIFY, USE OR TAKE ADVANTAGE OF THE DRAWING TO BUILD A HOUSE BASED ON THIS PLAN (WHETHER IN WHOLE OR IN PART) WITHOUT THE PRIOR WRITTEN CONSENT OF WILSON HOMES PTY LTD.

SPECIFICATION: DESIGNER COPYRIGHT: © 2026	REVISION		DRAWN		CLIENT: POOJA WIJERATNE & MENAKA DILSHAN ADDRESS: 50 LOGAN RD, EVANDALE TAS 7212 LOT / SECTION / CT: 2 / - / 186056 COUNCIL: NORTHERN MIDLANDS	HOUSE DESIGN: WOODBIDGE 24 FACADE DESIGN: CLASSIC SHEET TITLE: BAL 12.5 - BAL 40 ROOF DETAILS	HOUSE CODE: H-WDNWBG10SA FACADE CODE: F-WDNWBG10CLASA SHEET No.: 26 / 26	DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY. CHECK AND VERIFY DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL DISCREPANCIES TO BE REPORTED TO THE DRAFTING OFFICE. 714562
	7	CONSOLIDATED PROPOSAL 3 UPDATE	MFC	28/03/2026				
	8	PRELIM PLANS - INITIAL ISSUE	TNG	23/04/2026				
	9	PRELIM PLANS - AMENDMENTS	PL1	07.05.2026				
	10	PRELIM PLANS- DRIVEWAY UPDATE	RT2	11/05/2026				
	11	PRELIM PLANS - COLOUR AND VAR REF.001 UPDATE	TRV	21/05/2026				



SUBJECT TO NCC 2022
(1 MAY 2023)
WATERPROOFING & PLUMBING
CONDENSATION MANAGEMENT

PLAN ACCEPTANCE BY OWNER

SIGNATURE: DATE:

SIGNATURE: DATE:

PLEASE NOTE THAT VARIATIONS WILL NOT BE ACCEPTED AFTER THIS PLAN ACCEPTANCE HAS BEEN SIGNED